


REPORT NO. 600-200

GENERAL DYNAMICS | ASTRONAUTICS, A DIVISION OF GENERAL DYNAMICS CORPORATION

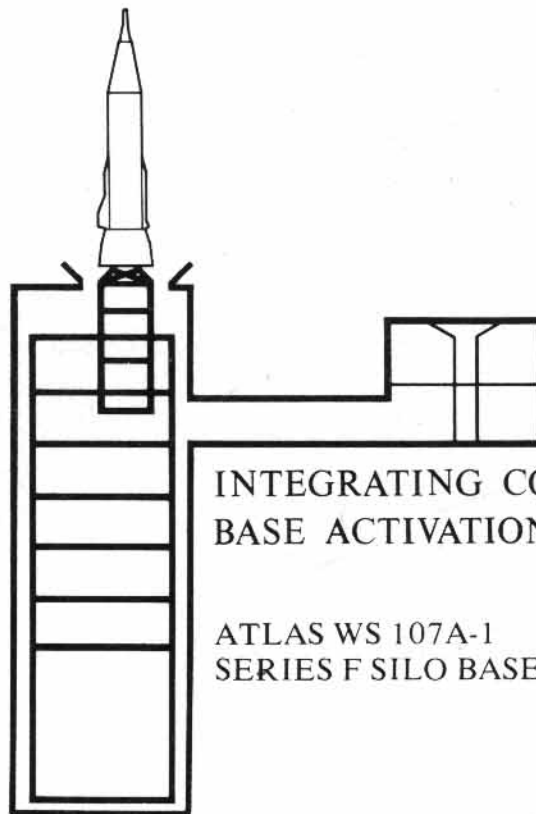

INTEGRATING CONTRACTOR'S  
BASE ACTIVATION PROJECT MANUAL

ATLAS WS 107A-1  
SERIES F SILO BASES

REPORT NO. 600-200

INTEGRATING CONTRACTOR'S  
BASE ACTIVATION PROJECT MANUAL

ATLAS WS 107A-1  
SERIES F SILO BASES

*Prepared by*

GENERAL DYNAMICS | ASTRONAUTICS  
A DIVISION OF GENERAL DYNAMICS CORPORATION  
San Diego, California

MARCH 1961

## CONTENTS

INTRODUCTION	v
I. ORGANIZATIONS AND FUNCTIONS	1
II. BASE ACTIVATION PROJECT CONTROL PLAN	13
III. BASE ACTIVATION OPERATIONS CONTROL PLAN	43
IV. BASE DEPLOYMENT AND DESIGN	47
V. FACILITY AND GROUND SUPPORT EQUIPMENT	57
VI. GLOSSARY	103

## INTRODUCTION

This manual describes the procedures by which Astronautics Division of General Dynamics Corporation ensures the efficient activation of an Atlas Series F silo missile base.

The data herein was derived from portions of the Base Activation Plan developed for the silo bases. Procedures are in accordance with Air Force Contracts 04(647) 455 and 04(647) 557.




I. ORGANIZATIONS AND FUNCTIONS

## SERIES F BASE ACTIVATION ORGANIZATION STRUCTURE

The organizational structure of the Base Activation Office and its relationship to other Astronautics offices and departments is shown on the opposite page.

Detailed organization charts and outlines of responsibilities within offices and departments are shown in Base Activation Instructions and in "Astronautics Organization", a publication of the Organization and Systems Department, Industrial Engineering Office.

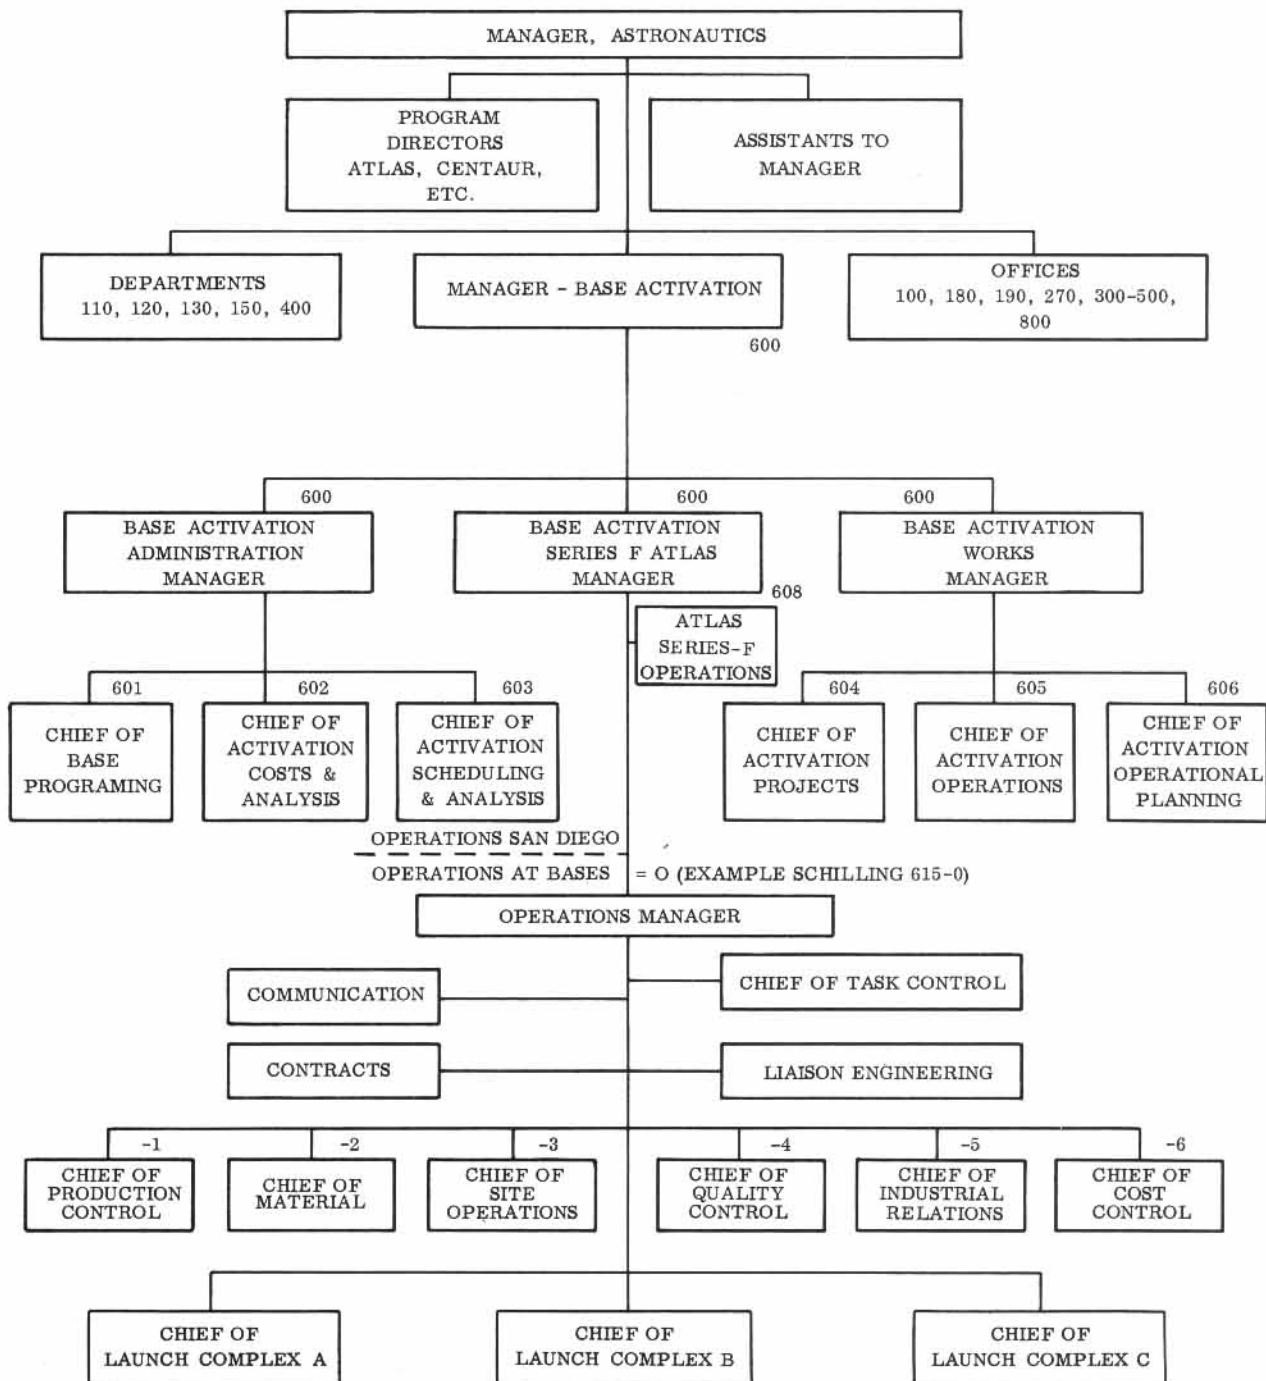

SERIES F BASE ACTIVATION ORGANIZATION STRUCTURE


## POLICIES AND RESPONSIBILITIES FOR ASTRONAUTICS AND ASSOCIATES

Air Force Ballistic Missile Division Exhibit 60-67 dated December 1960 prescribes the management policies and procedures required to activate the Series F silo bases.

The Air Force has designated as associate contractors: Astronautics, General Electric Missile and Space Vehicle Department (MSVD), and Kellogg Switchboard and Supply Co. Additionally, the Air Force has designated Astronautics as the weapon system contractor in all phases of base activation (except munitions) directly supporting the missile system. Astronautics also acts as integrating contractor in other phases of the over-all base activation task as shown on the opposite page.


Kellogg acts as the integrating contractor in all activation phases directly supporting the communications function. For munitions, GE-MSVD is the integrating contractor.

In general, the chart on the opposite page displays the task responsibilities of the associate contractor, the responsibilities of Astronautics as weapon system contractor, and the suppliers of major GFP/GSE items.

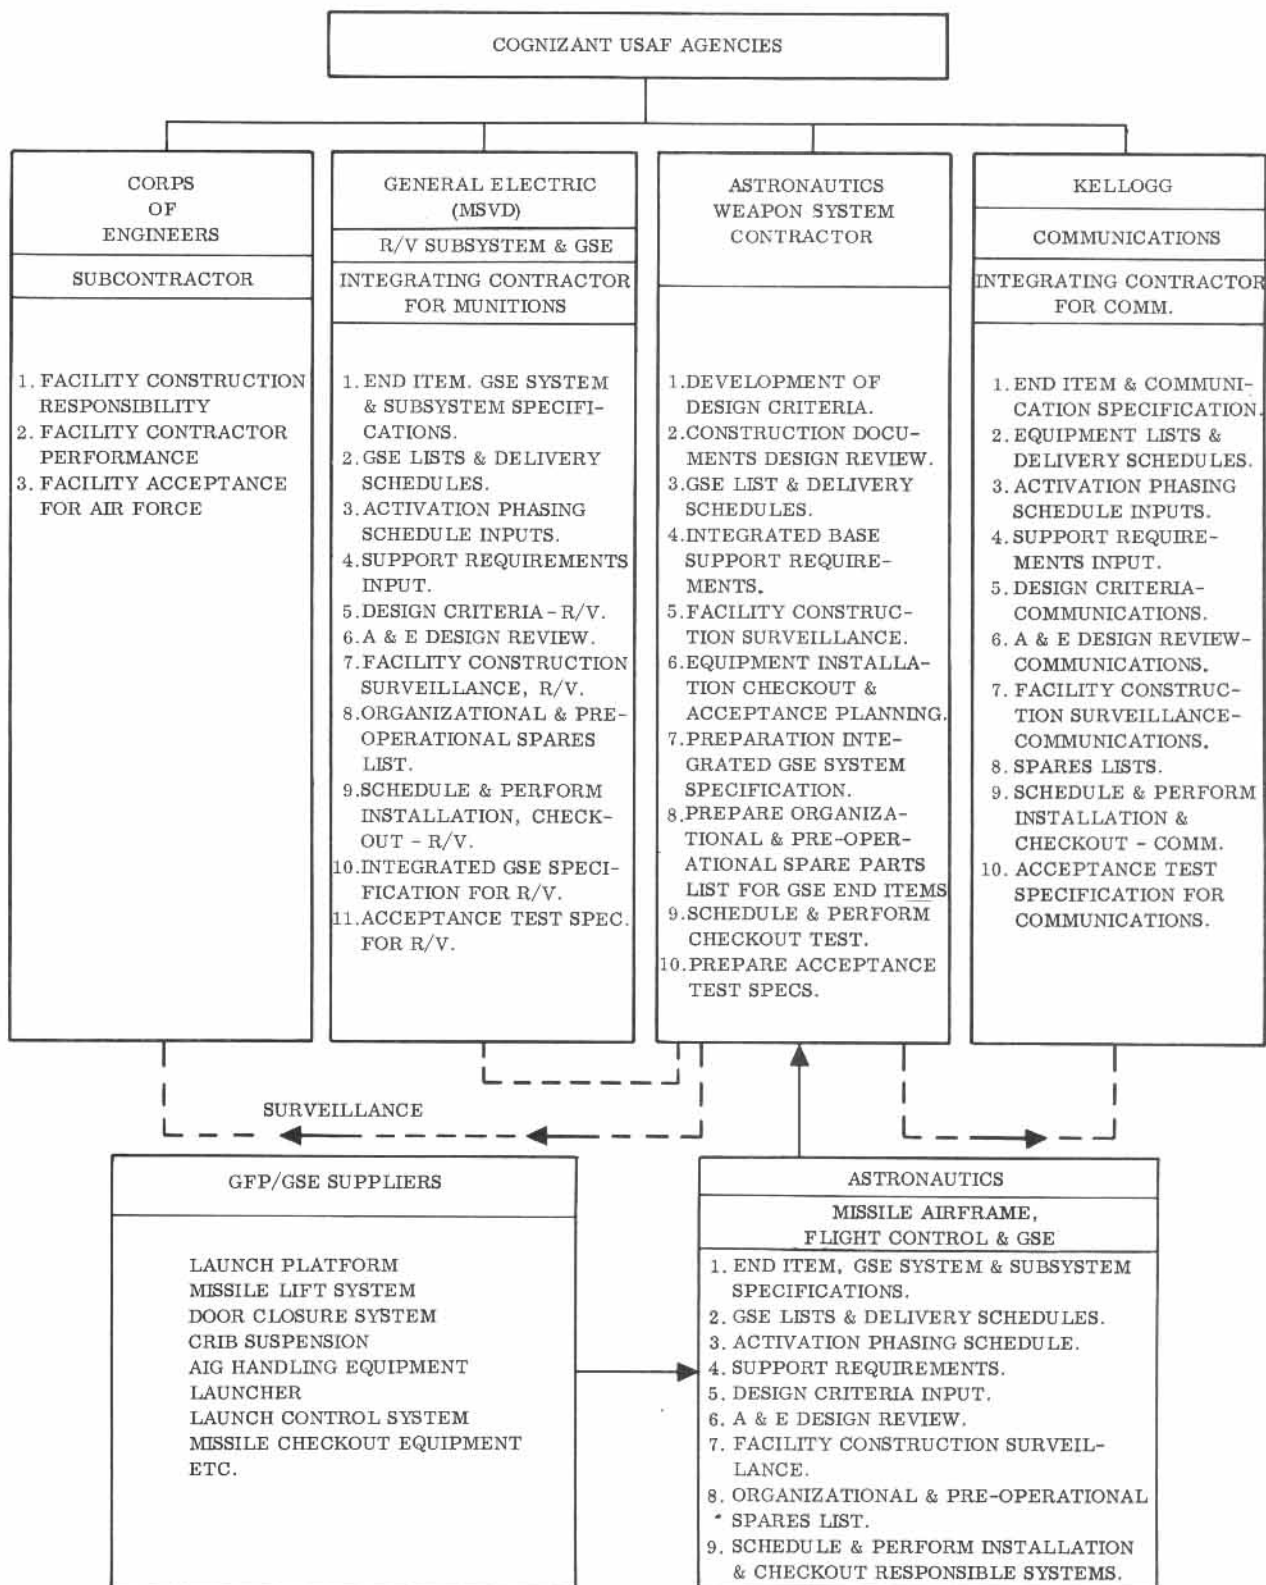

POLICIES AND RESPONSIBILITIES FOR ASTRONAUTICS  
AND ASSOCIATES

SITE ACTIVATION TASK FORCE  
BASE ORGANIZATION

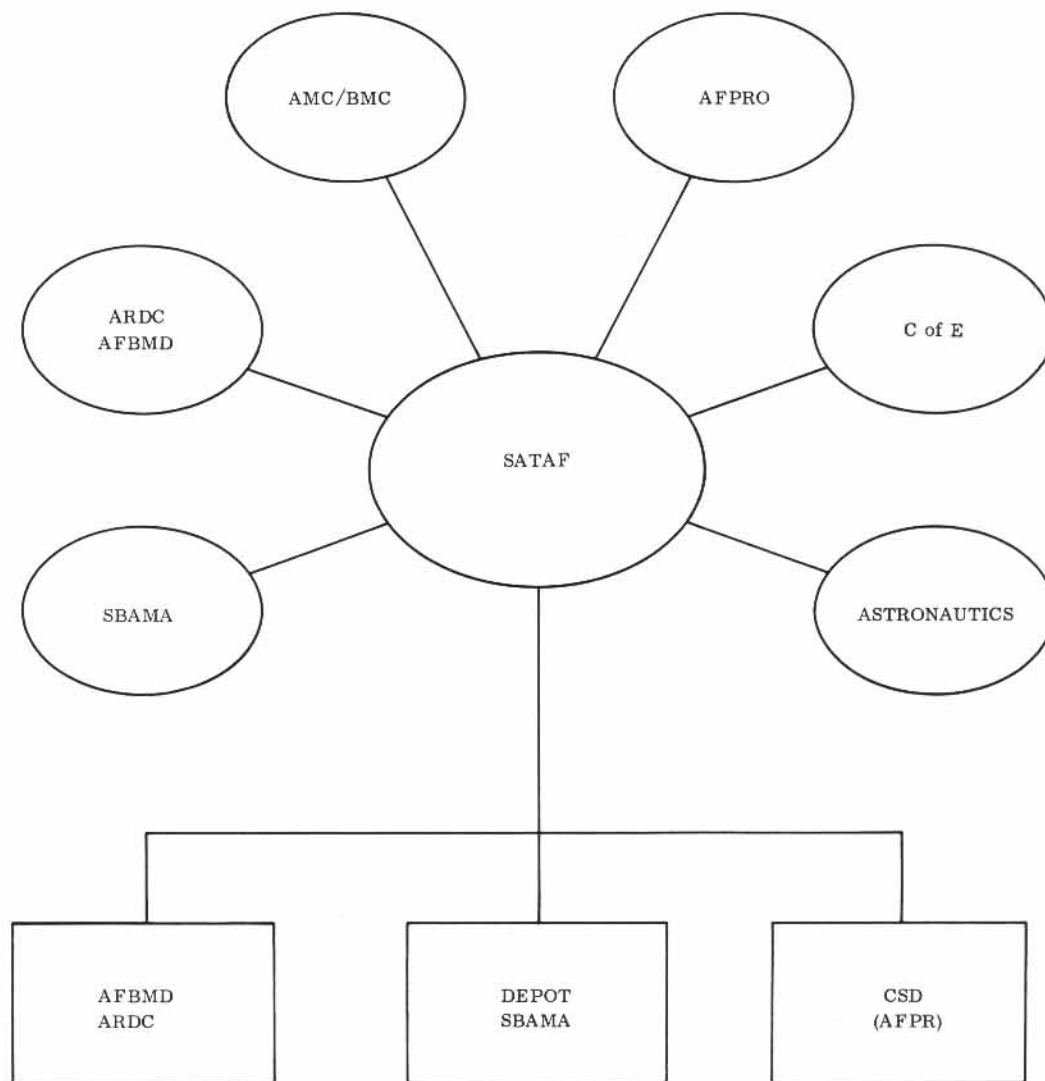


SITE ACTIVATION TASK FORCE  
BASE ORGANIZATION

## ACTIVATION RESPONSIBILITIES AND SEQUENCE

The chart on the opposite page shows the general sequence in which the responsibilities of all agencies are exercised in the over-all task of base activation.




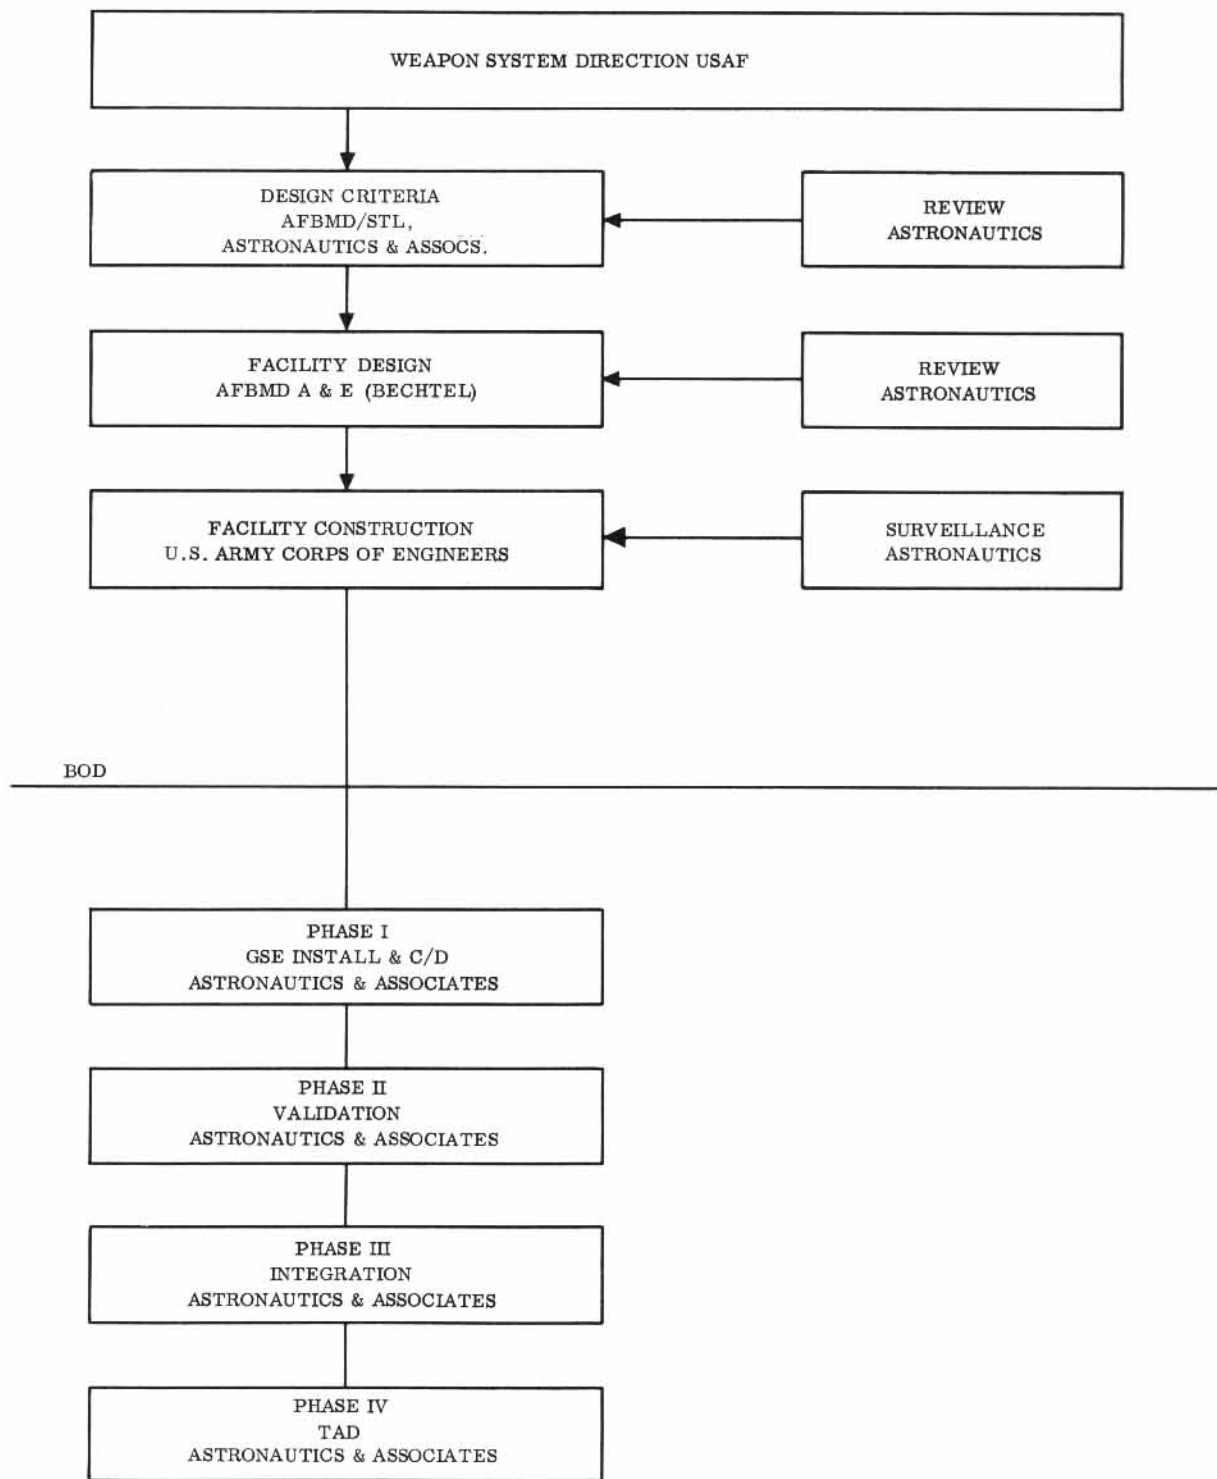

## ACTIVATION RESPONSIBILITIES AND SEQUENCE

## SILO PROJECT COORDINATION

The activation of silo bases requires inputs from many geographically separated contributors. Effective scheduling and coordination of the separate contributions, plus assurance of consistency in base configuration, is a prime objective of the Weapon System Contractor's Project Control Plan.

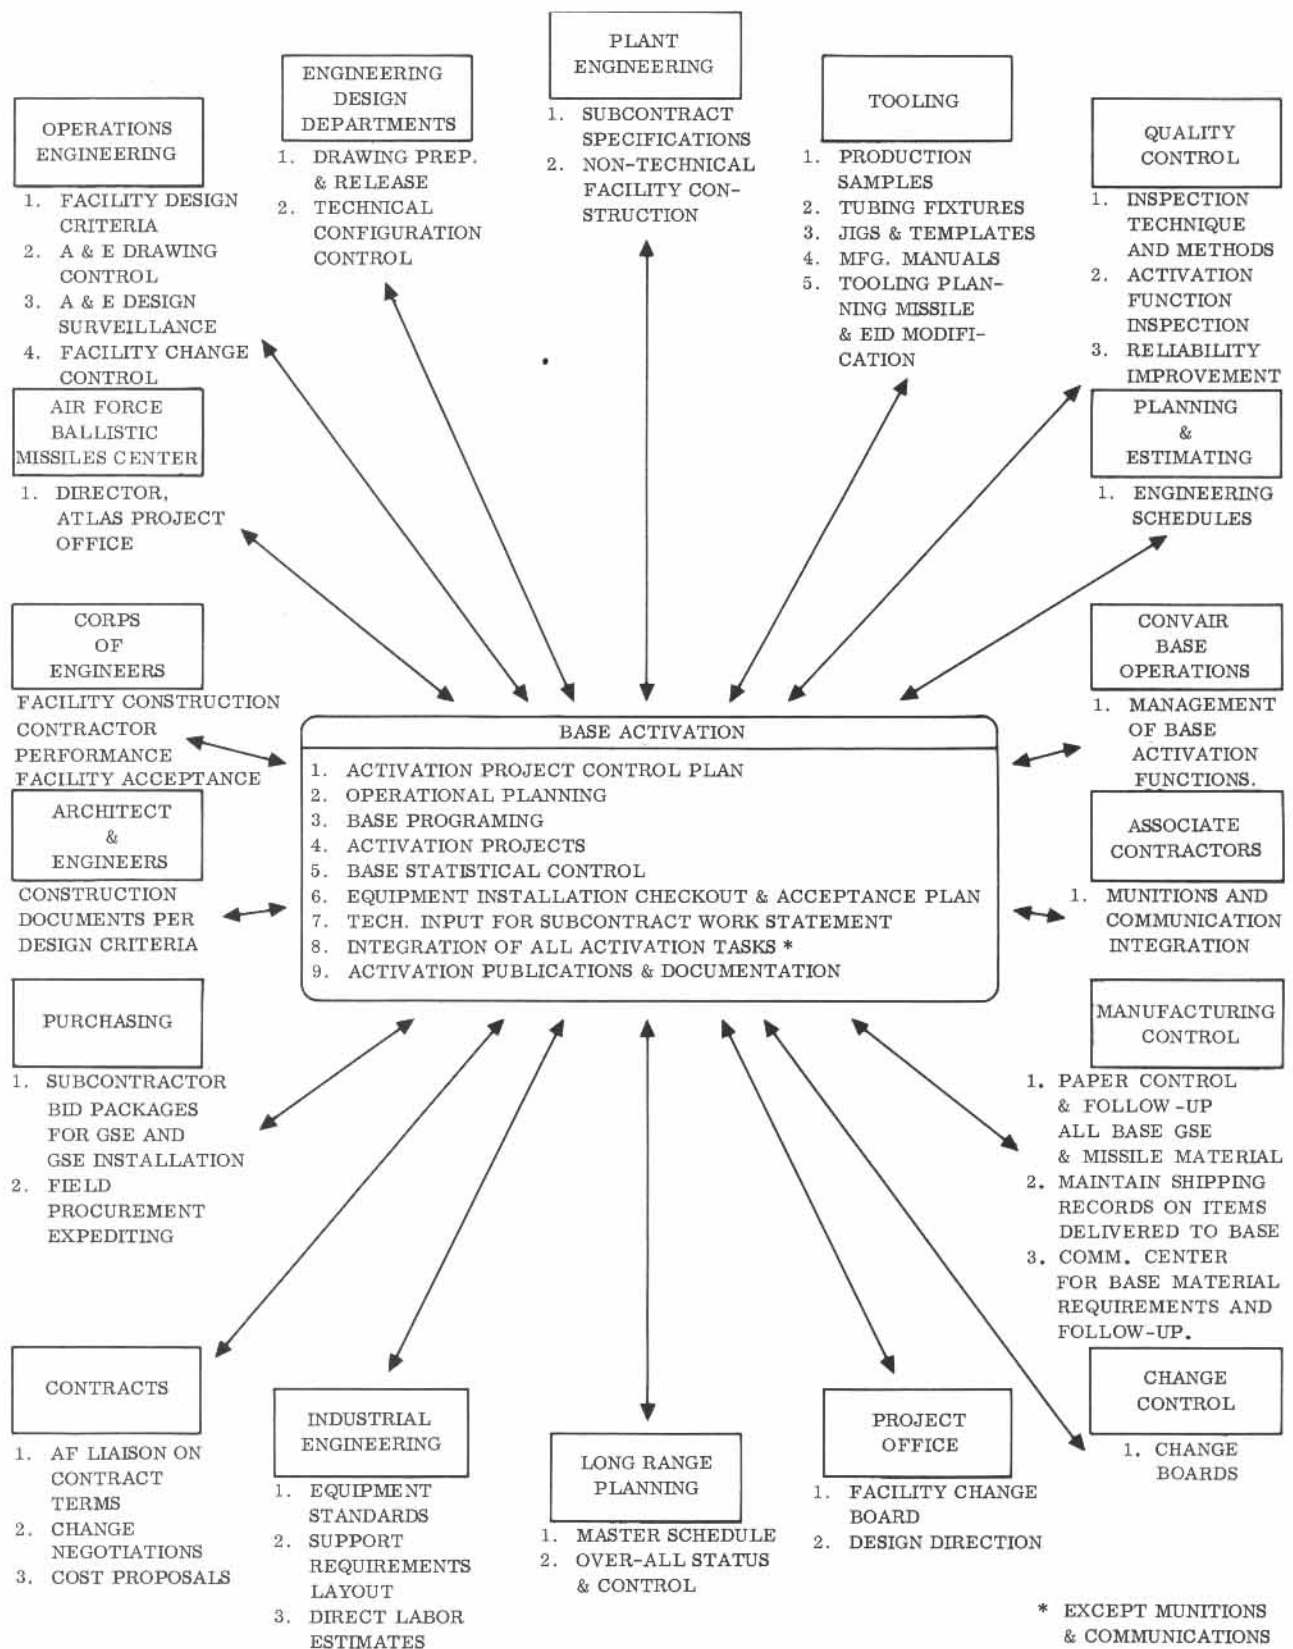

## SILO PROJECT COORDINATION

## II. BASE ACTIVATION PROJECT CONTROL PLAN

## PROJECT CONTROL PLAN


The principal objectives which must be attained to ensure maximum effectiveness of the Atlas Series F silo missile base activation effort are presented on the opposite page.

## OBJECTIVES

1. A complete bill of materials for activation.
2. Continuity and coordination of engineering from all sources.
3. Adequate facilities surveillance control prior to BOD.
4. Effective post-BOD GSE installation inspection and checkout control.
5. Total configuration control.
6. An effective and accurate method of status reporting.
7. Complete documentation of the over-all base activation task.
8. Utilization of effective production techniques during activation.
9. Recognition and resolution of problem areas.
10. Means for assuring a high level of reliability.

## COMPLETE BILL OF MATERIAL FOR ACTIVATION

The complexity and magnitude of the Atlas Series F silo missile base activation task requires efficient implementation media to achieve the objectives of the program. A complete "Bill of Material for Activation" is shown on the opposite page.

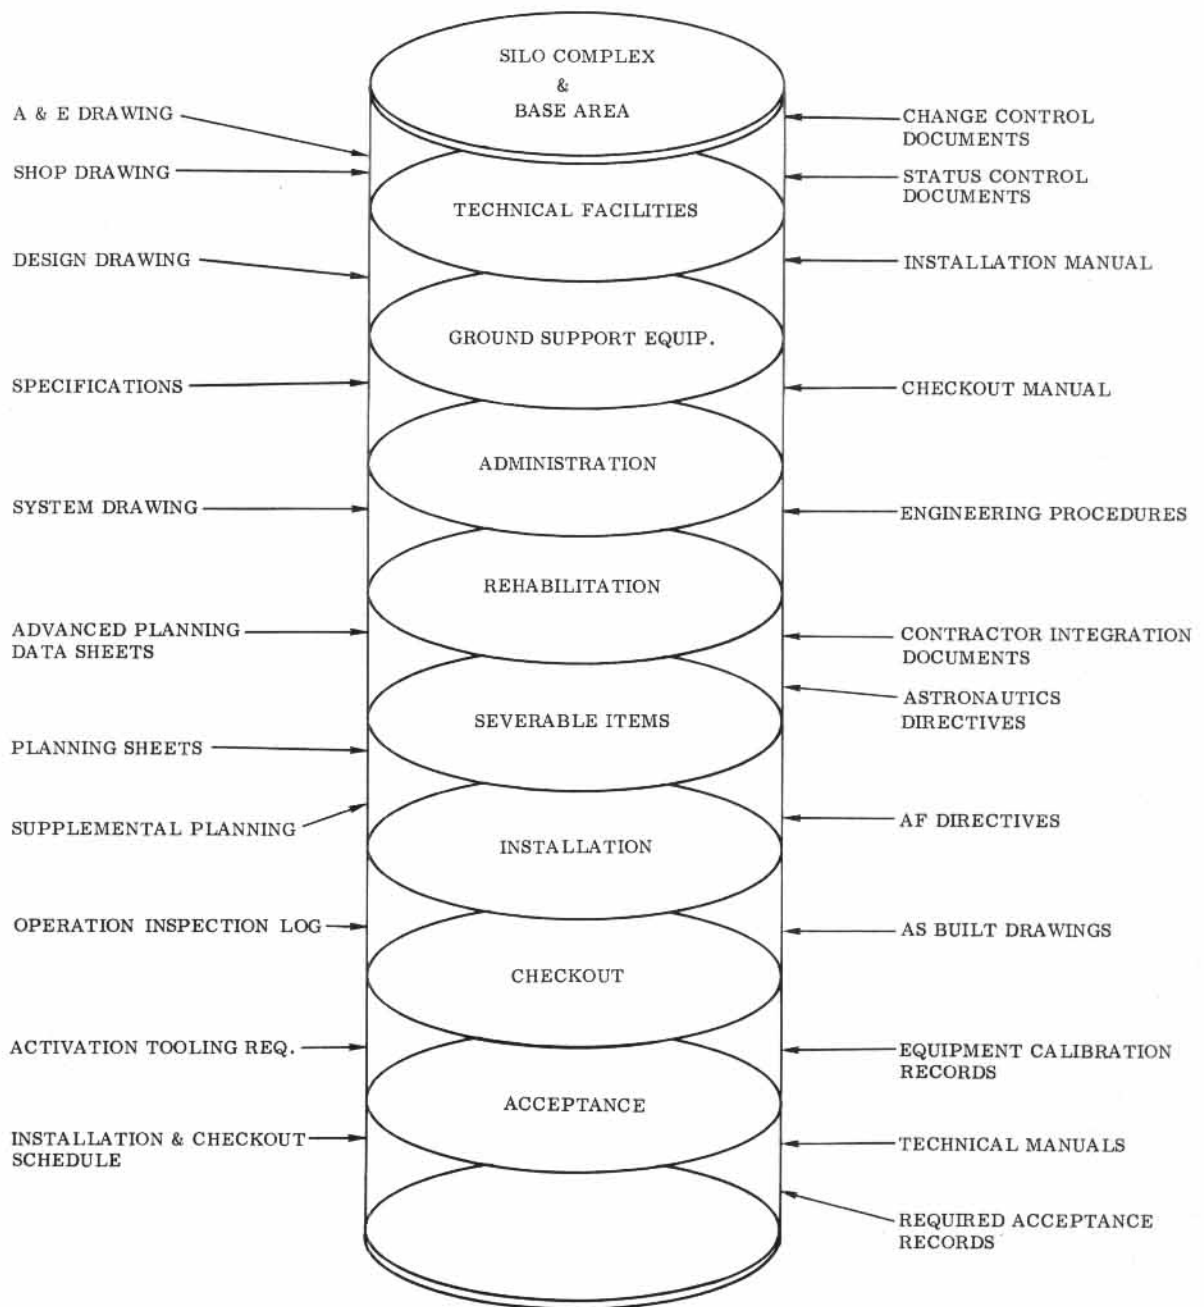


# COMPLETE BILL OF MATERIAL FOR ACTIVATION



## INSTALLATION AND CHECKOUT SCHEDULE

The Installation and Checkout (I&C) Schedule shows the sequence and relationship of activation tasks to be accomplished by Astronautics and the associate contractors. This document is the basis for all activation scheduling. Status report data may be entered on the I & C Schedule for comparison of actual progress with scheduled progress. This provides immediate identification of areas which require extra effort.

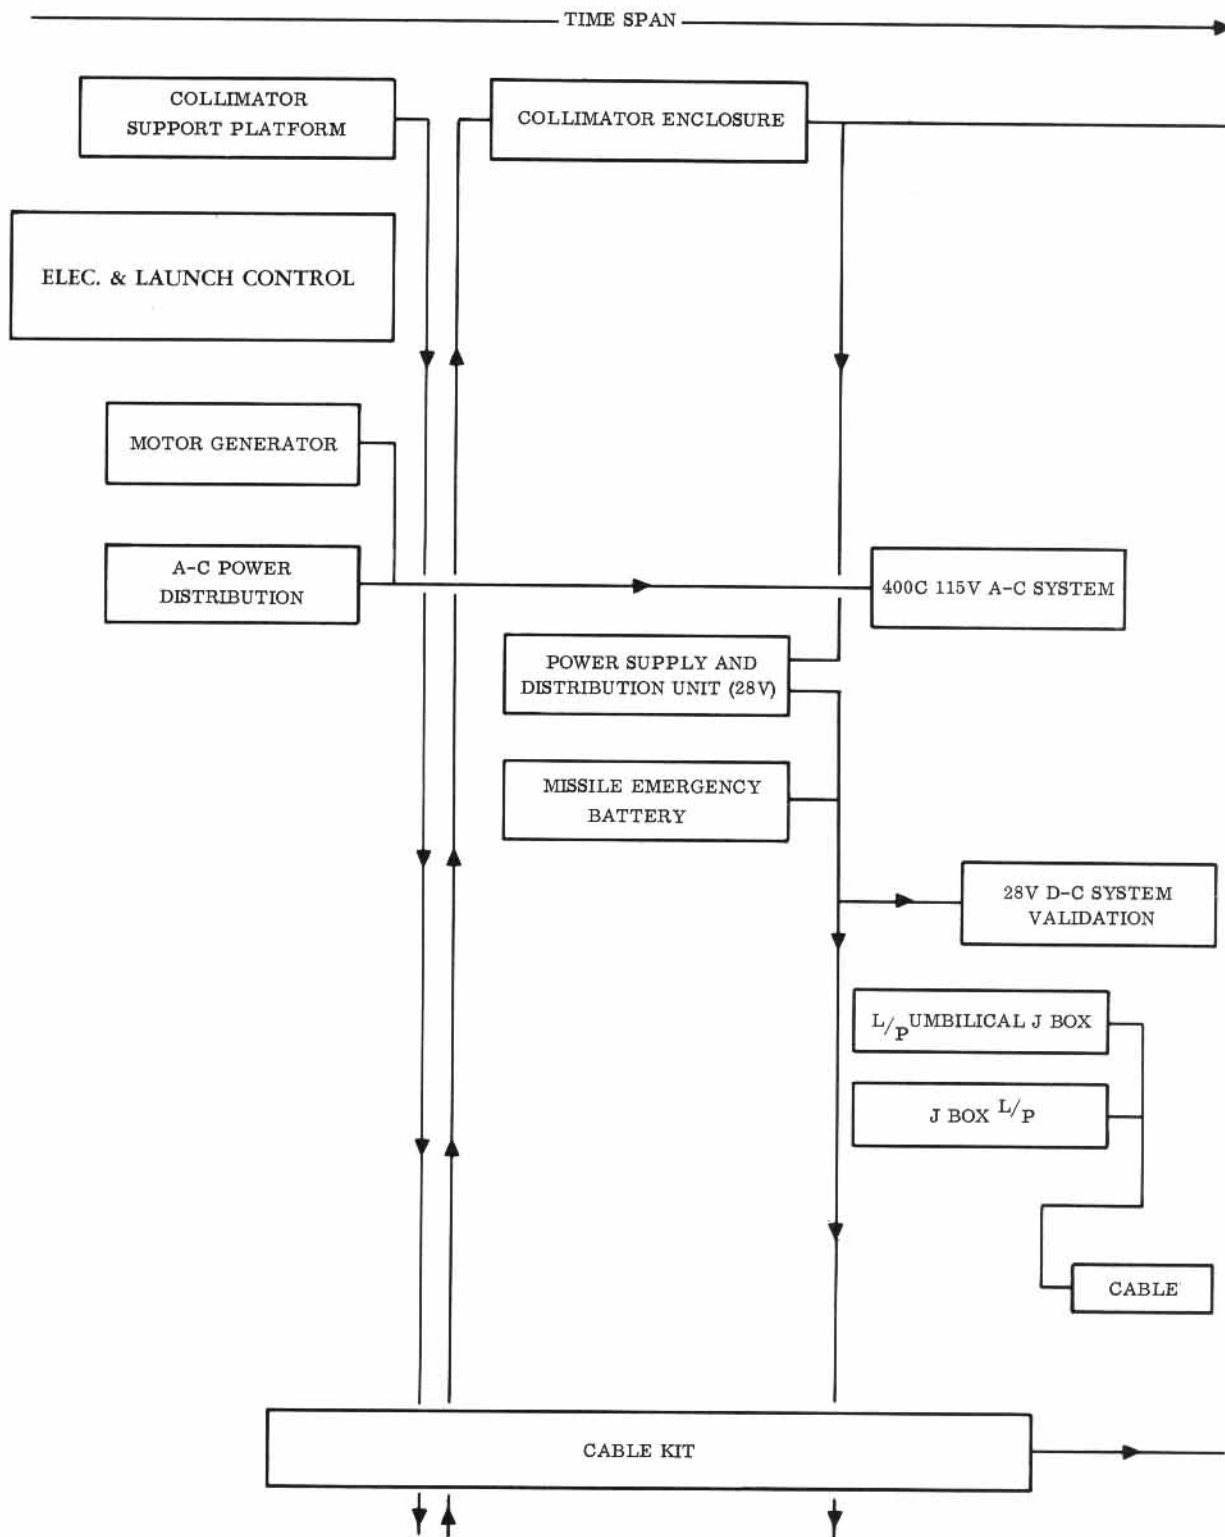


PORTION OF GSE INSTALLATION AND CHECKOUT SCHEDULE

## ITEM FLOW

An item, in Base Activation terminology, is an incremental collection of related tasks scheduled to be accomplished in a given time period. Item numbers are used to identify planning cards in the Operational Planning Control System.

Each major area of the base (Administration and Supply Building, Missile Assembly Building, Launch Silo, Launch Control Center, and Complex) is identified by a chronological series of items designed to construct or install and validate the facility and GSE in consecutive increments. After all construction, installation and validation items in an area have been completed, an integration item assembles that area with related completed areas until, by progressive integration of completed items, the final USAF acceptance item for the entire Atlas Series F missile base is signed off. The Base Activation task is then complete.

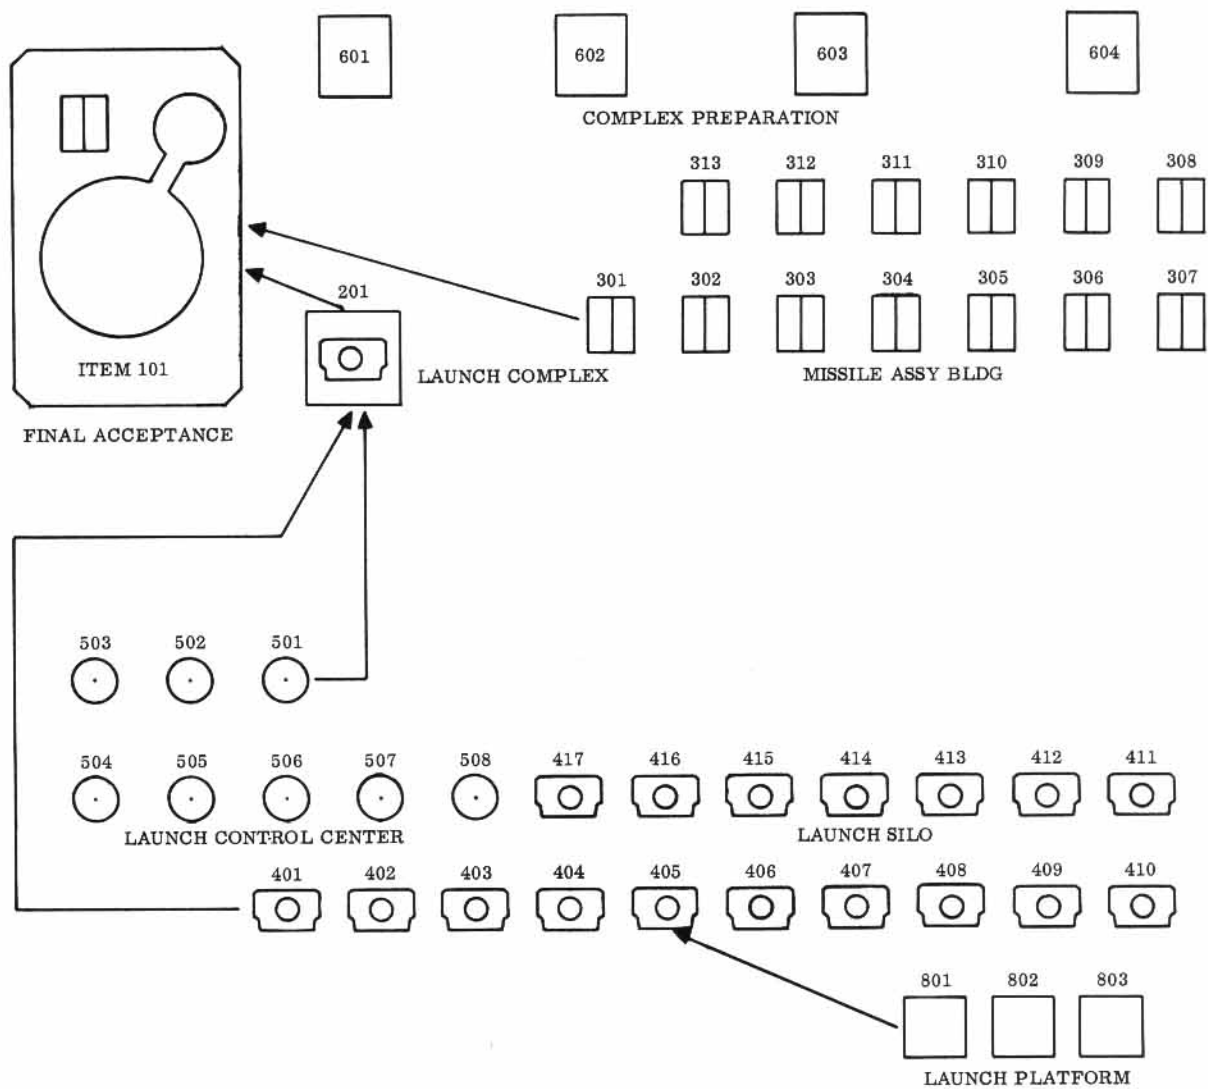

ITEM FLOW

## FUNCTION NUMBERS

Function numbers are assigned to systems and activities within the scope of the Project Control Plan for purposes of identification. The Series F silo base function numbers are listed on the opposite page.

# INTEGRATED FUNCTIONS

- 01 Launch control
- 02 480v power
- 03 Pressurization missile
- 04 Fuel
- 05 LO<sub>2</sub>
- 06 GN<sub>2</sub>-GO<sub>2</sub> PLS transfer pressure
- 07 H<sub>e</sub>
- 08 LN<sub>2</sub>
- 09 Communication
- 10 Missile hydraulics
- 11 Missile lifting
- 12 Guidance
- 13 (R/V) Re-entry vehicle
- 14 Mobile checkout
- 15 Launch platform
- 16 48v d-c
- 17 Compressed air
- 18 Pod cooling
- 19 Diesel power
- 20 (HVAC) Heating, ventilating & air conditioning
- 21 Fire protection
- 22 400 cps a-c (tactical power)
- 23 Silo hydraulics
- 24 Detection
- 25 28v d-c
- 26 Missile and/or whalebone checkout
- 27 Thrust section heater
- 28 Crib suspension
- 29 Umbilical loop
- 30 Procedures
- 31 120/240, single phase, 60 cycle (control voltage)
- 32 120/208, three phase, lighting distribution
- 33 Emergency lighting
- 34 Through 39 unassigned

## ASTRONAUTICS OPERATIONS FACILITY FUNCTIONS

- 40 Shops
- 41 Motor pool
- 42 Calibration lab
- 43 Chemical lab
- 44 Not used
- 45 Severable items
- 46 Through 49 unassigned

## BASE SERVICE FUNCTIONS

- 50 Re-entry vehicle storage
- 51 Communication

# BASE SERVICE FUNCTIONS (Cont.)


- 52 Messing
- 53 Security
- 54 Post office
- 55 Reproduction
- 56 Transportation
- 57 Hospital
- 58 Fire protection
- 59 Maintenance
- 60 LO<sub>2</sub> plant
- 61 Through 68 unassigned

## NON-INTEGRATED FACILITY FUNCTION

- 69 MAB crane and hoist
- 70 Site orientation and layout
- 71 Easement and access road
- 72 Grading & earthwork (site)
- 73 Roads & paving
- 74 Fencing
- 75 Utility excavation & trenching
- 76 Waste water system
- 77 Facility wiring
- 78 Surface drainage
- 79 Grounding system
- 80 Sanitary waste system
- 81 Domestic & utility water
- 82 Cooling water
- 83 Foundations & floors
- 84 Embedded hardware
- 85 Equipment & personnel openings platforms
- 86 Wall & bldg. sections
- 87 Process piping supports
- 88 Blast closures & doors
- 89 Cable trays & trench covers
- 90 Elect. fixtures & fittings
- 91 Plumbing fixtures & fittings
- 92 Finish grading
- 93 Landscape & erosion control
- 94 Suspended structures
- 95 Surface surveillance & warning
- 96 Painting & corrosion control
- 97 Personnel service equipment
- 98 Demineralized water
- 99 Rehabilitation

ASTRONAUTICS DRAWING SYSTEM FOR SILO BASES

Basic Astronautics drawing numbers are shown on the opposite page.

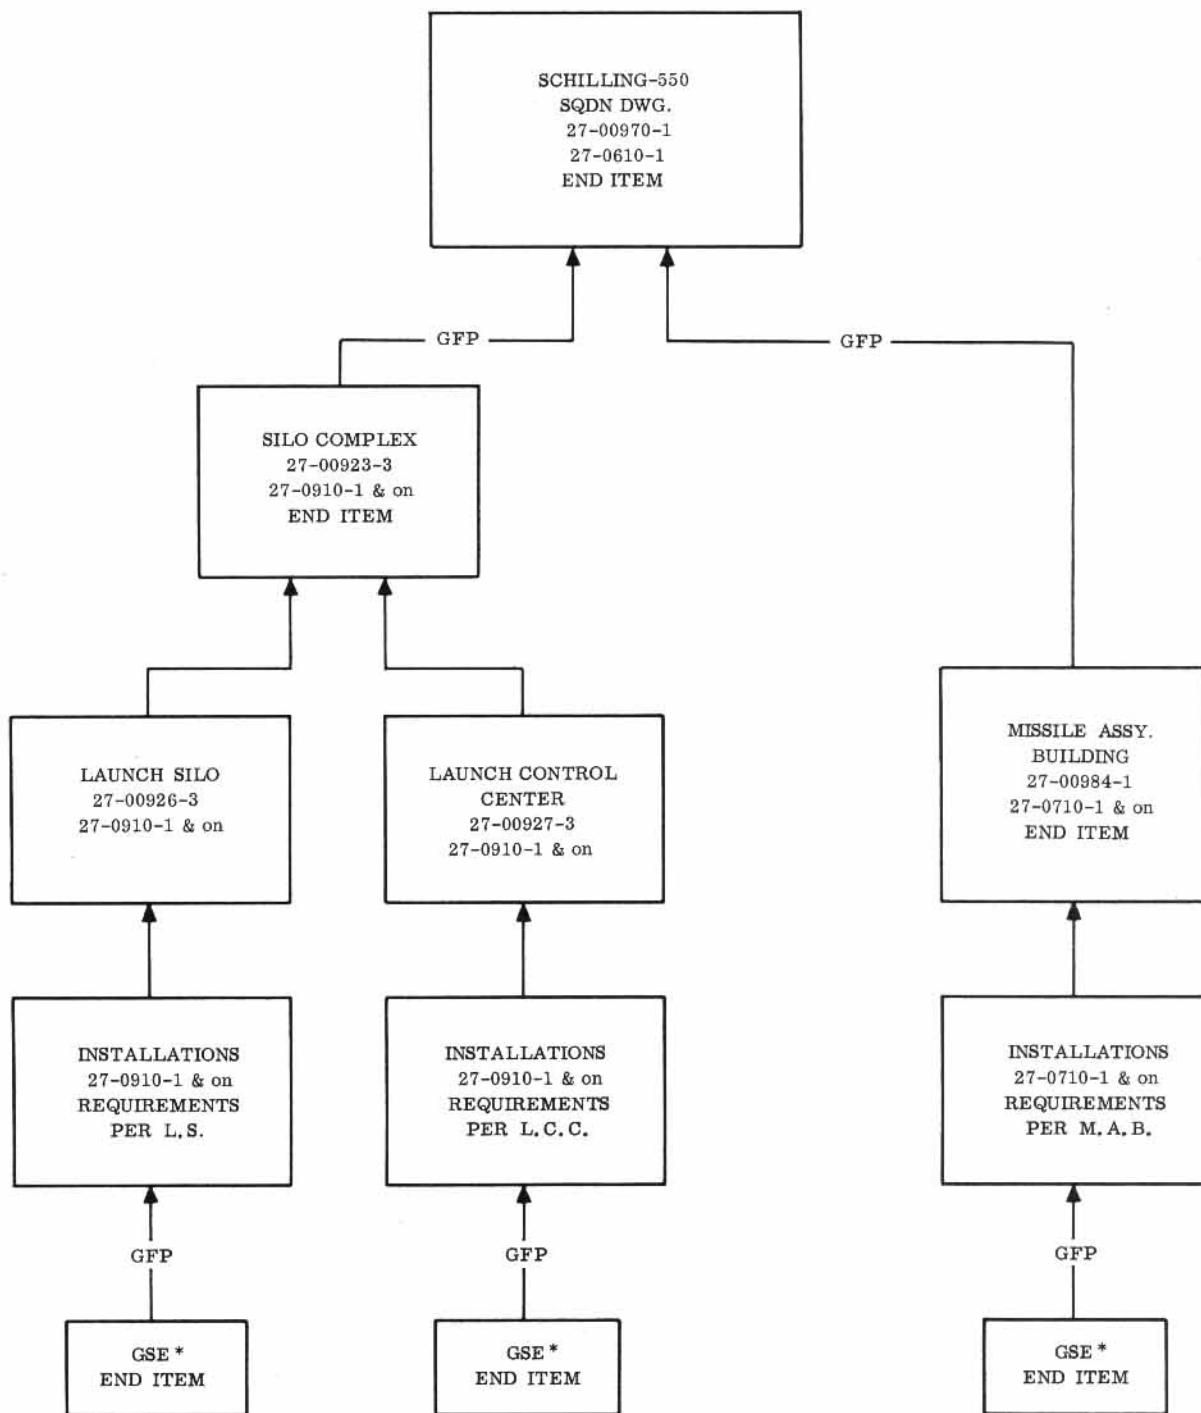

\* FOR ALLOCATION OF END ITEMS  
SEE 27-90047 DOCUMENT.

DRAWING SYSTEM



## ADVANCE PLANNING ELEMENTS

A primary Base Activation task is the assembly of engineering information from all sources and the final conversion of this information into detailed instructions for the installation, checkout and validation of the Series F silo systems.

System drawings, site installation requirements lists and Advance Planning Data Sheets are prepared by Base Activation engineers to define the specific activation tasks related to the original design drawings, specifications and procedures. This information is used in the preparation of the Operational Planning Cards.

System drawings are schematic compilations of facility, GSE, GOE, and GFP components. These are the only drawings which provide a complete picture of the relationship of all components within the system.

Site Installation Requirement Lists (SIRLs) provide detailed information on hardware requirements, packaging and shipping. The SIRL is used by other Astronautics departments, vendors and the customer to prepare documents required to control the flow of materials.



## OPERATIONAL PLANNING

From the Advanced Project Planning documents, Department 606 planners generate the detailed planning paper displayed on the opposite page.

This planning is issued to the base in packages composed of Operation Inspection Logs (OIL), one copy of each Planning Card listed on the OIL, and one IBM tab card for each Planning Card. The tab cards are punched by Department 192 so that machine processing can produce status reports in a variety of formats. A Drawing Release Record covers the package.


Before the scheduled actual need for detailed planning, one preliminary (reference) copy of the OIL package (less tab cards) is sent to the base. This package assists in preplanning activation task execution and material requirements.

On or before the actual need date, the following are officially released to the base as replacements for the preliminary package:

ONE AUTHORIZED  
OIL PACKAGE

TWO REFERENCE  
OIL PACKAGES

TWO EXTRA REFERENCE  
SETS OF PLANNING CARDS

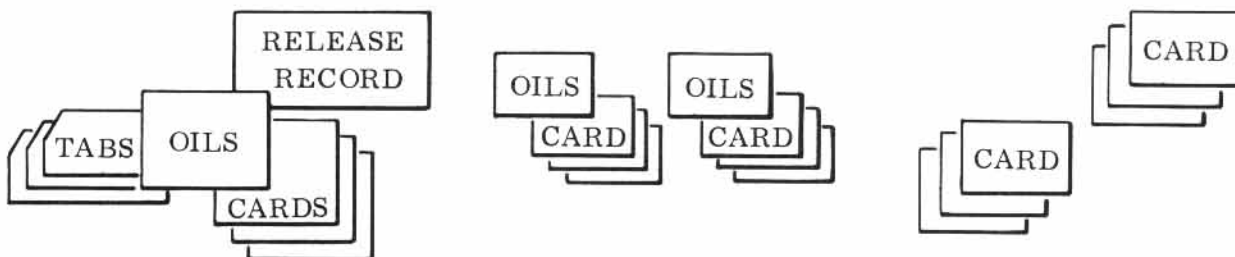

As they become available, the base is supplied with pertinent Engineering Change Summaries (ECS), Drawing Change Summaries (DCS), Planning Summary Sheets, and change data on each authorized Supplemental Planning card.

## OPERATIONAL PLANNING


## BASE ACTIVATION CHANGE CONTROL

Change control will be exercised by Department 600, using presently established channels. Design revisions (TVAs, EOs, ECPs and GMAs) will, in most cases, cause revisions in activation planning. The changes will be reflected on Project Control Drawings, when required, and on Bills of Material. These changed documents and supplemental planning cards will then be issued to the base to define the new task.


It is the intent of the Project Control Plan that all planning necessary for activation be issued from San Diego. When occasions arise where immediate change requirements must be met by the base, supplemental planning will be issued by the base planning personnel in the form of planning cards. The change will be transmitted immediately to San Diego for official documentation and effectivity review.

The flow chart on the opposite page indicates the routing of facility and GSE change information.

# FACILITY CHANGE CONTROL COMPATIBILITY ECP FLOW CHART

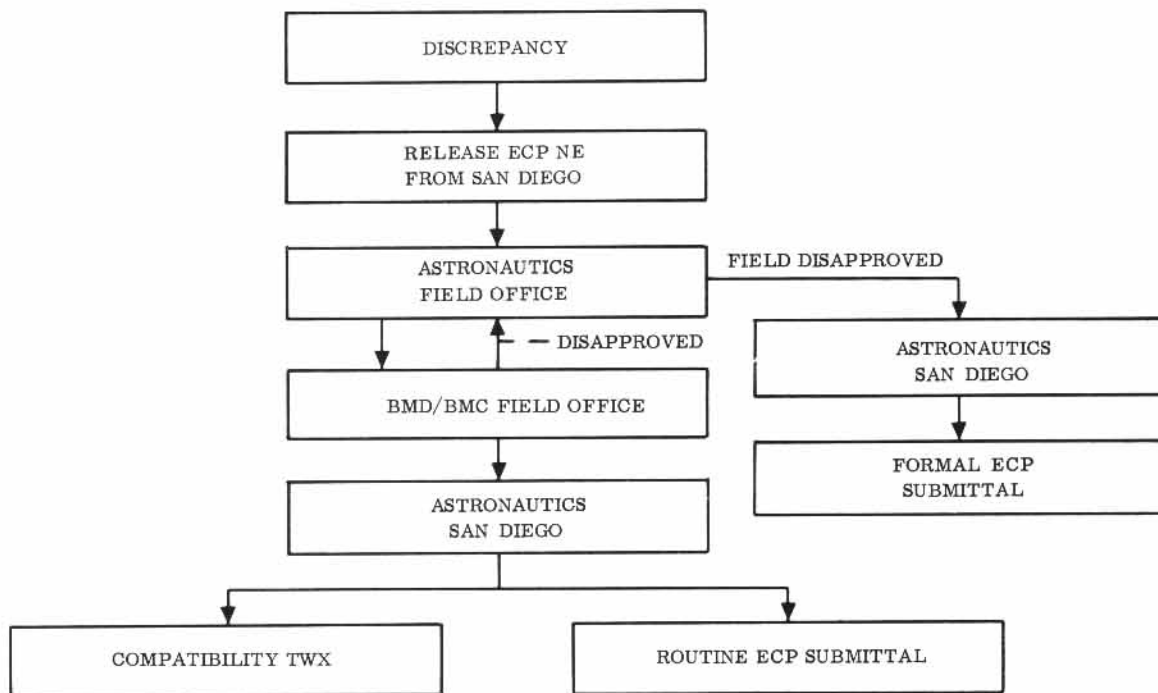

## GSE CHANGE CONTROL

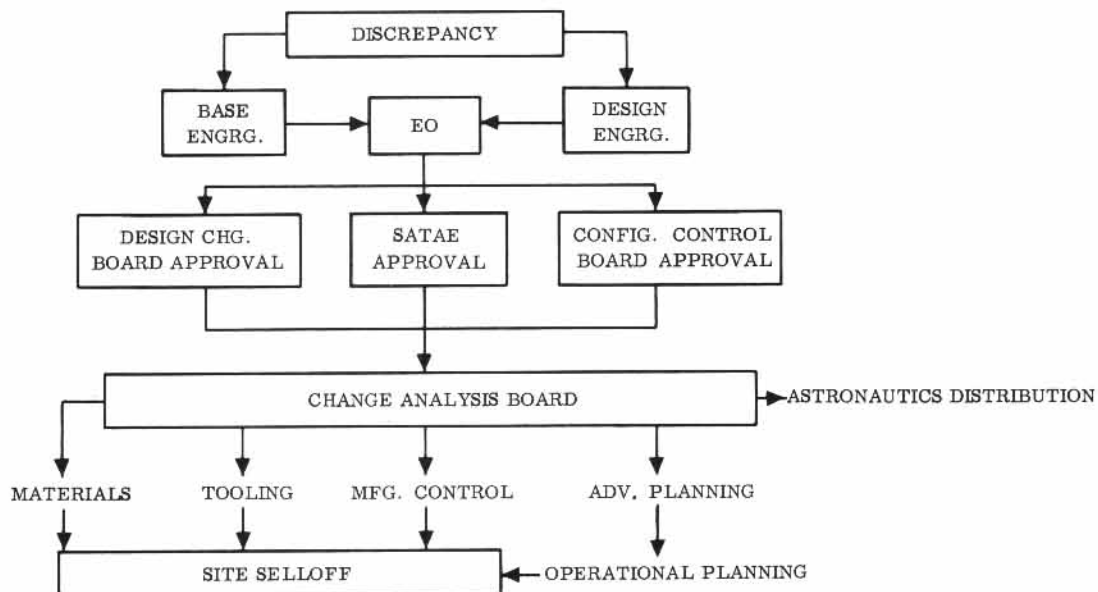

## FACILITY AND GSE CHANGE CONTROL

## ECP-CIC STATUS AND CONFIGURATION CONTROL

ECP-CIC configuration and status control has been established in accordance with the Atlas Weapon System Configuration Index, AFBMD 60-36. Implementation of this procedure assures compatibility of engineering design, related documents, missile and technical facility hardware installations with the requirements of AFBMD 60-36.

Planning departments at all bases establish and maintain ECP-CIC status and configuration control records and demonstrate configuration control documentation during the installation, checkout and final selloff phases of Base Activation.

ECP-CIC status IBM tab runs are maintained for accountability.






## STATUS REPORT CONTROL

Accurate, comprehensive reporting of progress on a continuing cycle is a prime tool for the orderly prosecution of the over-all Base Activation task. The Project Control Plan, by sectionalizing each feature of construction or installation into discrete, logical packages provides the means for reporting progress in specifically described increments.

A generalized representation of the status reporting flow is displayed on the opposite page. As tasks described on the Planning Cards are completed, the authorized cards and the corresponding Status Report tab cards are stamped to record the fact, and the corresponding entry on the OIL also is stamped.

Periodically, all stamped tab cards are sent by mail to Base Activation Department (600) in San Diego. These cards are processed for Department 600 by Data Processing (Department 192). The master deck of tab cards is punched to correspond with the cards received from the base, after which the master deck is used to produce the status report.

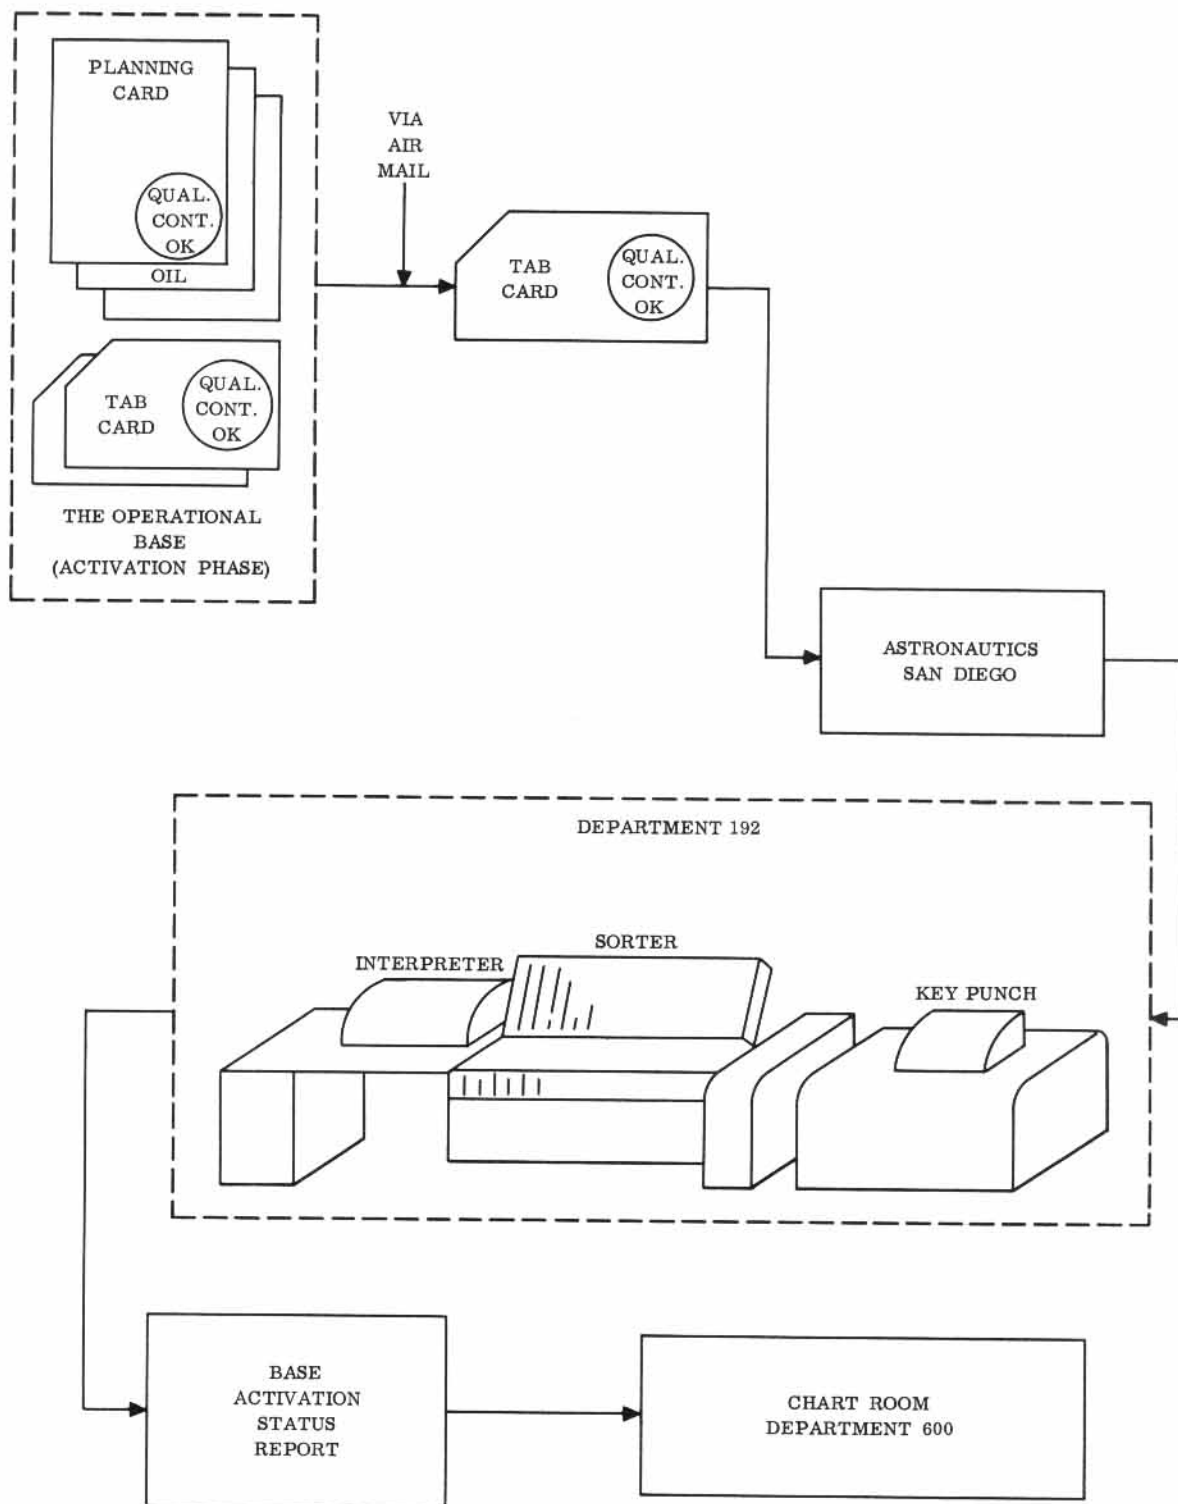

### STATUS REPORT CONTROL

## FULL-SCALE SILO MOCKUP

The Mockup is designed as a "master tool" and is constructed to exact specifications, identical to the operational base silo configuration with respect to location of equipment, simulation of equipment and interconnection location.


The mockup consists of three major units:

1. A 111-ft. tower, comprising levels 1 through 6 with a simulated ground level.
2. A 77-ft. tower, comprising levels 7 and 8.
3. A simulated launch platform.

The purpose of this "master tool" is to provide proofing for all interconnecting installations such as piping, tubing, cabling and ducting as well as gross area of maximum volume occupancy to accurately determine equipment space allocations.

Some of the advantages realized in the construction and installation of the full-scale mockup: The mockup permits early determination of engineering discrepancies, thereby reducing material loss and installation time in the field. It is used extensively as a training tool for Astronautics and Air Force personnel.

The mockup concept permits a more practicable approach to required changes, reduces vendor rework, and permits early determination of requirements for design, manufacturing and proofing of production tooling.

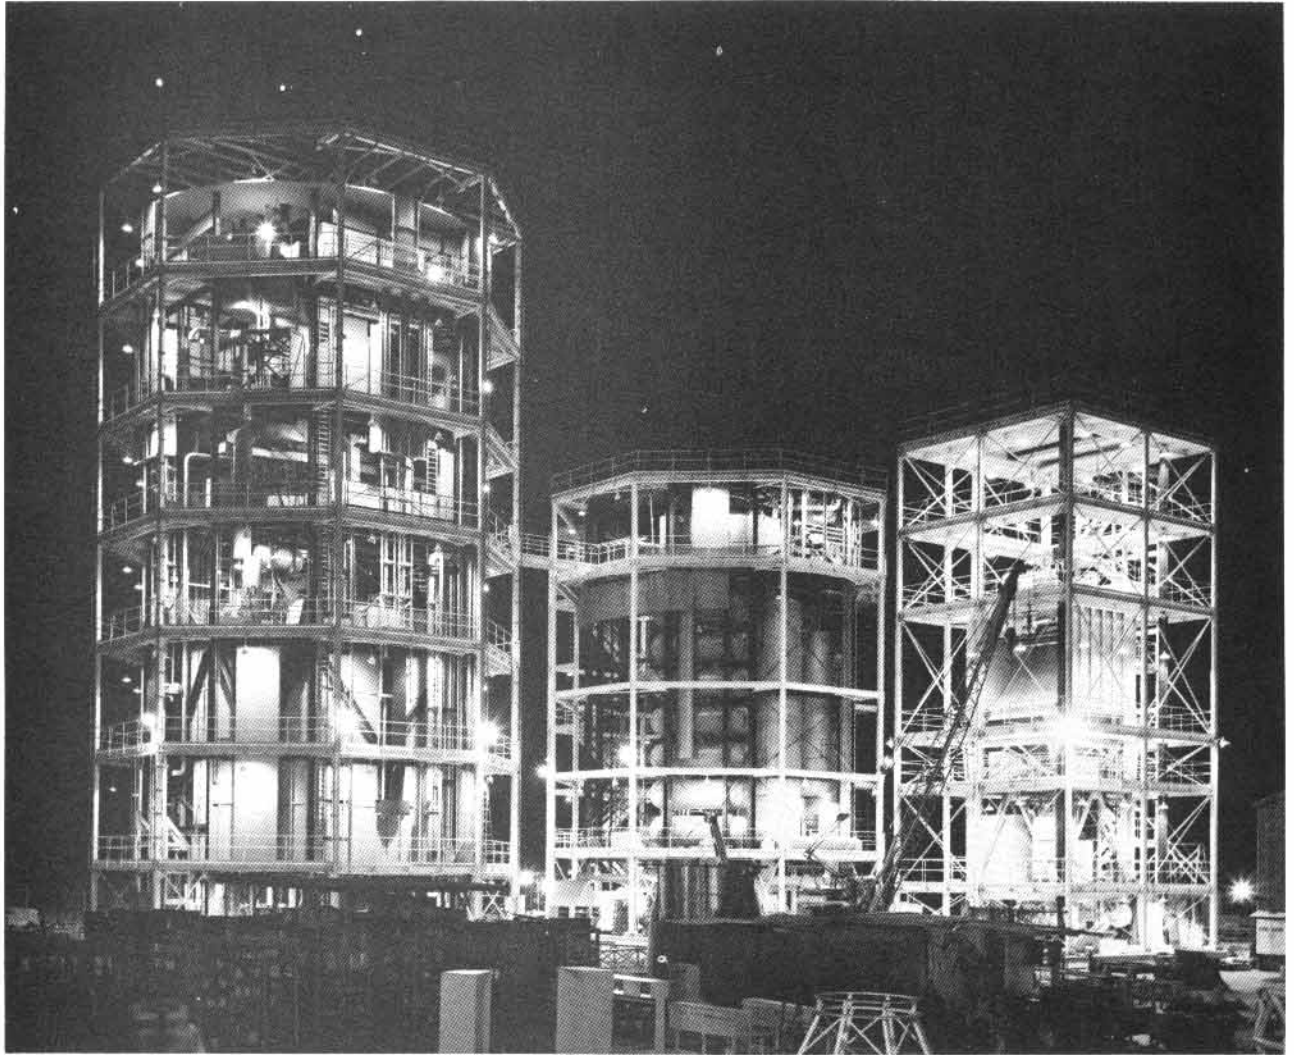


FULL-SCALE SILO MOCKUP

## ACTIVATION TOOLING

A large number of special optical and mechanical tools are used in silo Base Activation. Facility and interface surveillance requires the use of special alignment tools. Installation and checkout tools are used in conjunction with installation, checkout, integration and final selloff demonstrations.

Base Activation determines tooling requirements and coordinates the tooling effort.


A drawing of the check gage for the silo launcher assembly is shown on the opposite page.

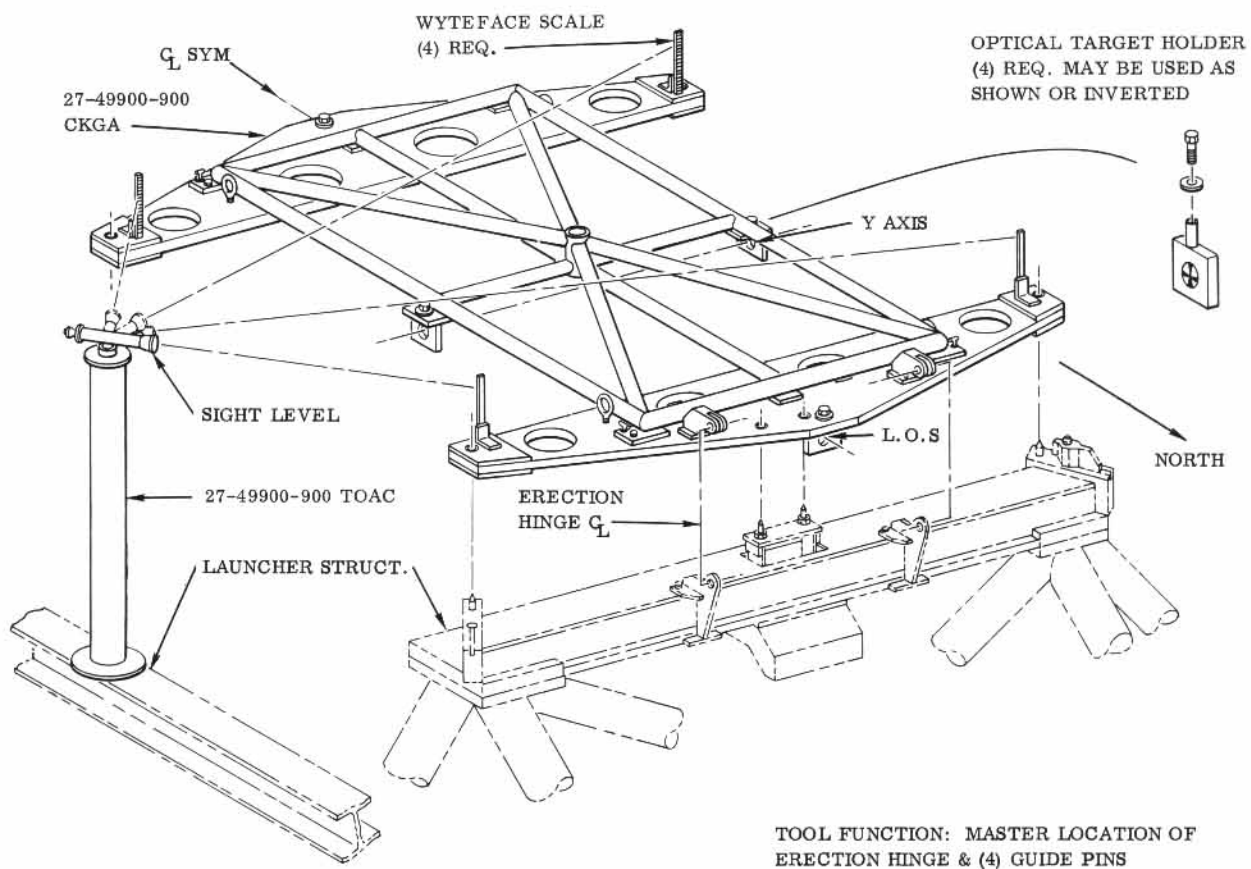

LAUNCHER ASSEMBLY CHECK GAGE

## VALIDATION TEST TOOLS

Validation tools or kits are designed and fabricated for use in silo surveillance and checkout. The nitrogen charging unit (NCU) test panel validation kit shown on the opposite page is typical. It contains the valves, gages, pressure regulators and connecting hoses necessary to carry out the specified checkout procedures for the NCU.

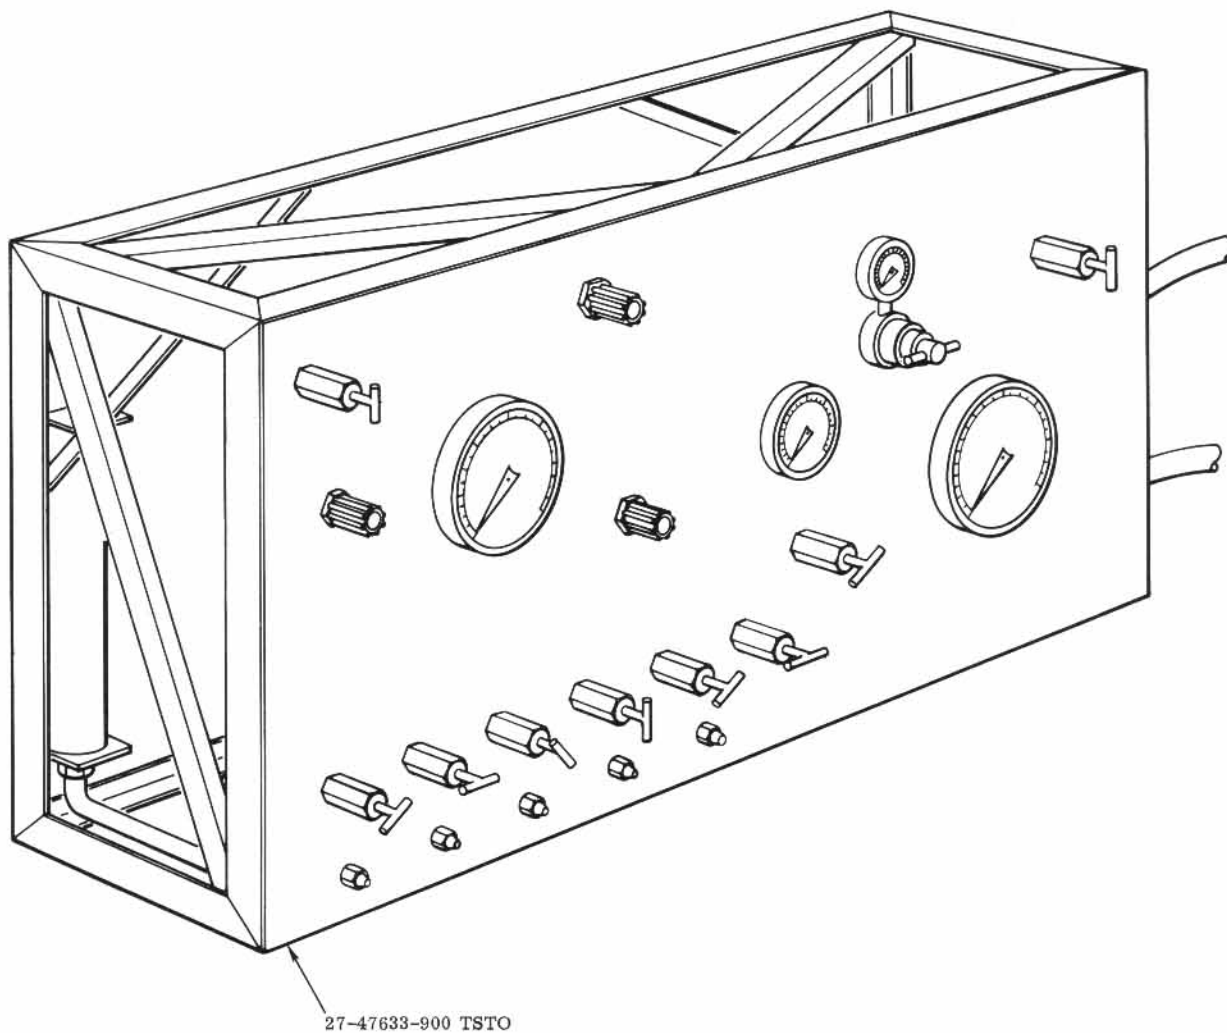

NCU TEST PANEL VALIDATION KIT



### III. BASE ACTIVATION OPERATIONS CONTROL PLAN

## BASE ACTIVATION OPERATIONS CONTROL PLAN


Base Activation Operations Control is a method of work control developed to collate the activation efforts at the three prime levels of responsibility -- complex, base and program. The principal objective in the development has been to provide a complete work plan for use at the complex, so devised that the necessary support from the Astronautics base organization is directly related and that San Diego program support is immediate and formulated upon existing and anticipated conditions.

Operations Control is achieved by the Work Control Plan as the basic control instrument with the organization of the Astronautics base personnel in direct support of the complex activation effort. Base Activation Departments in San Diego acting on Work Control Plan analyses provide the necessary support action as influenced by program objectives and schedules.

The controlling and key factor in activating a launch complex is the ability to perform validations and systems tests satisfactorily and on schedule. The procedures used to accomplish the validation and integration operations prove to the customer that all work, both facility and GSE installations, has been completed satisfactorily. The Work Control Plan, organizes all activation tasks into the logical flow of work which precedes and relates to a particular procedure. The installation tasks are planned and scheduled in relation to a procedure and the procedures are inter-related in critical path and sequence.

The Work Control Plan is packaged for maximum utilization at the complex and is oriented for easy evaluation of priority tasks. Each procedure has a separate work control sheet on which all related planning card information is placed. The work control sheets are positioned in a visible record type-holder in required sequence and critical path order, and a transparent overlay is provided for analysis of schedule priority. A means is provided for quick evaluation of open and sold planning and for status of procedure selloff.

Supporting documents shown on the opposite page are provided for implementation of the Work Control Plan.

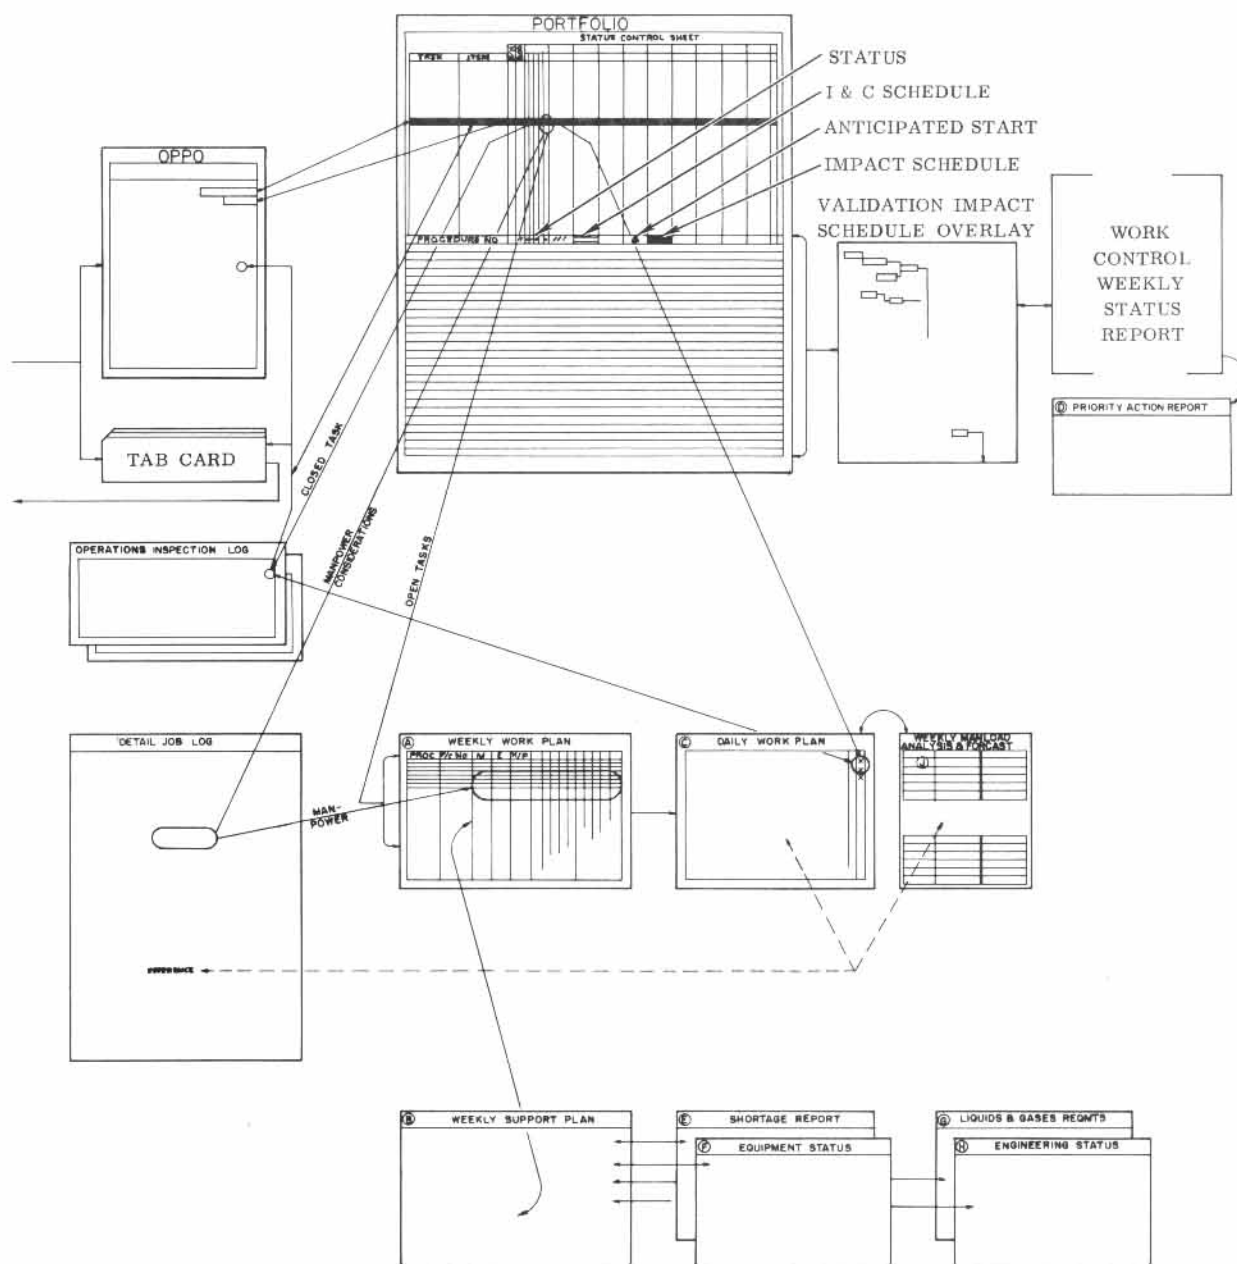


WORK CONTROL OPERATIONS - COMPLEX

#### IV. BASE DEPLOYMENT AND DESIGN

## BASE DEPLOYMENT

Currently authorized Atlas missile bases are deployed in the general pattern shown on the opposite page. The distances between bases and Base Activation headquarters in San Diego are natural deterrents to good communication. Total compliance with the detailed means and methods of the Project Control Plan provides maximum effectiveness of communication, coordination and control.

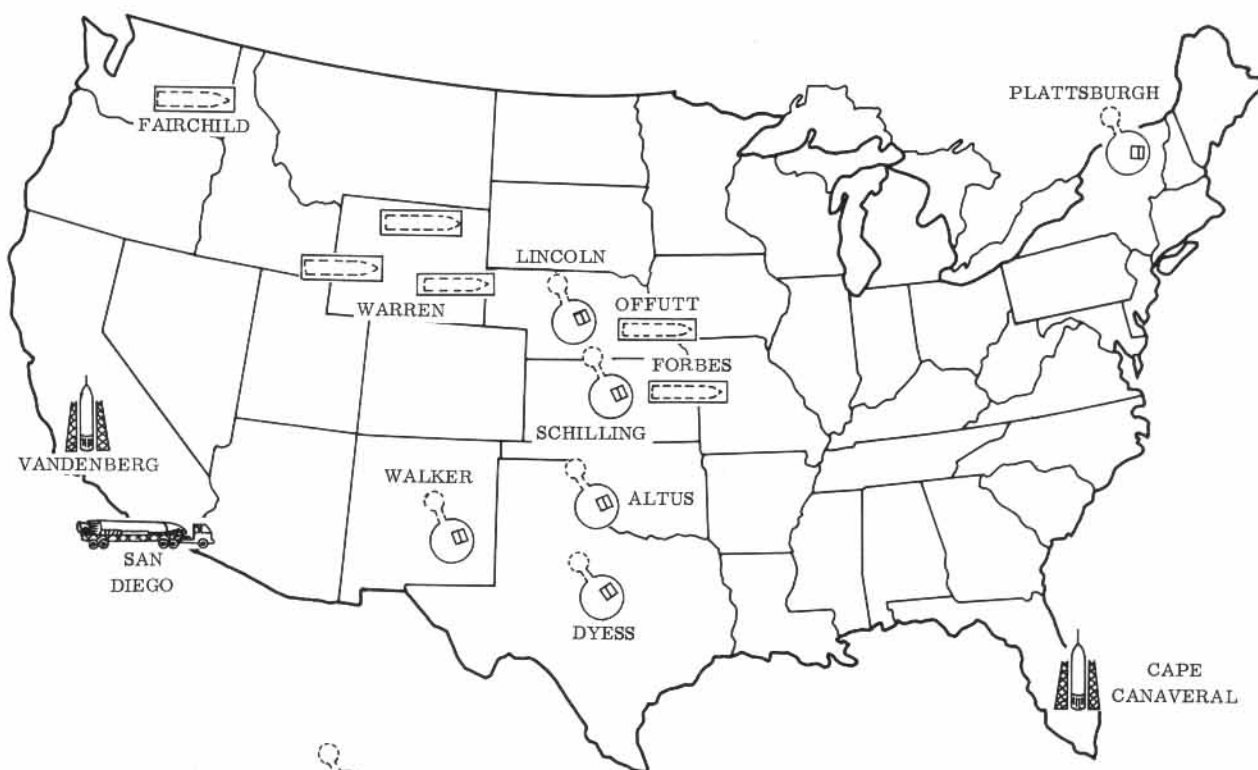

1 SILO COMPLEX

2 HORIZ. COMPLEX

3 R & D


4 MANUFACTURING



## BASE DEPLOYMENT

### BASE DESIGN PHILOSOPHY

Each silo base consists of 12 launch sites deployed as shown on the accompanying map of Plattsburgh Air Force Base, New York. The first consideration in locating the sites is maximum dispersal for protection against enemy action. Other major considerations are local topographical and geological conditions. Each launch site is operationally independent. All 12 sites are dependent for logistic support on a common Squadron Maintenance Area, and are controlled from a central administration area.

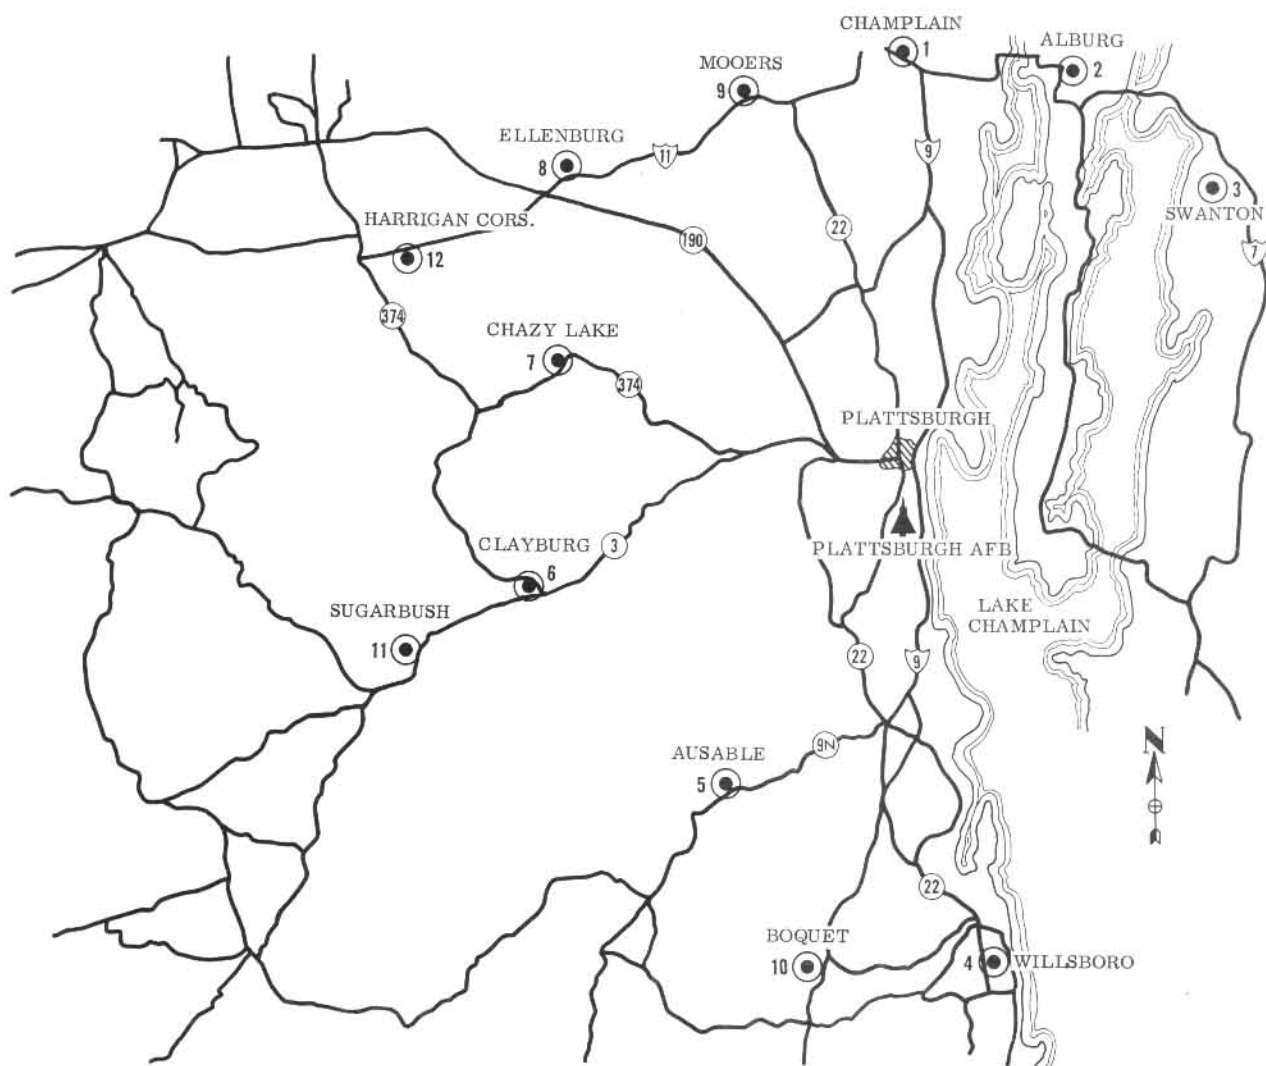

# MILES FROM PLATTSBURGH

# POPULATION



SITE	PLATTSBURGH
1	30 MI.
2	38 MI.
3	52 MI.
4	30 MI.
5	26 MI.
6	34 MI.
7	32 MI.
8	27 MI.
9	33 MI.
10	28 MI.
11	36 MI.
12	39 MI.


19,000
1,505
1,400
1,400
1,000
1,650
500
300
500
500
100
100
100

SCALE OF MILES



## SILO BASE LAYOUT

A typical Series F silo squadron is shown on the opposite page. In the launch-ready configuration, all structures and equipment at a launch complex will be below ground, as at complexes 2 through 12 in the illustration. Only during maintenance operations will equipment be dispersed as shown at Complex 1. The mobile ground support equipment shown is based at the Squadron Maintenance Area and delivered to a launch complex as required.

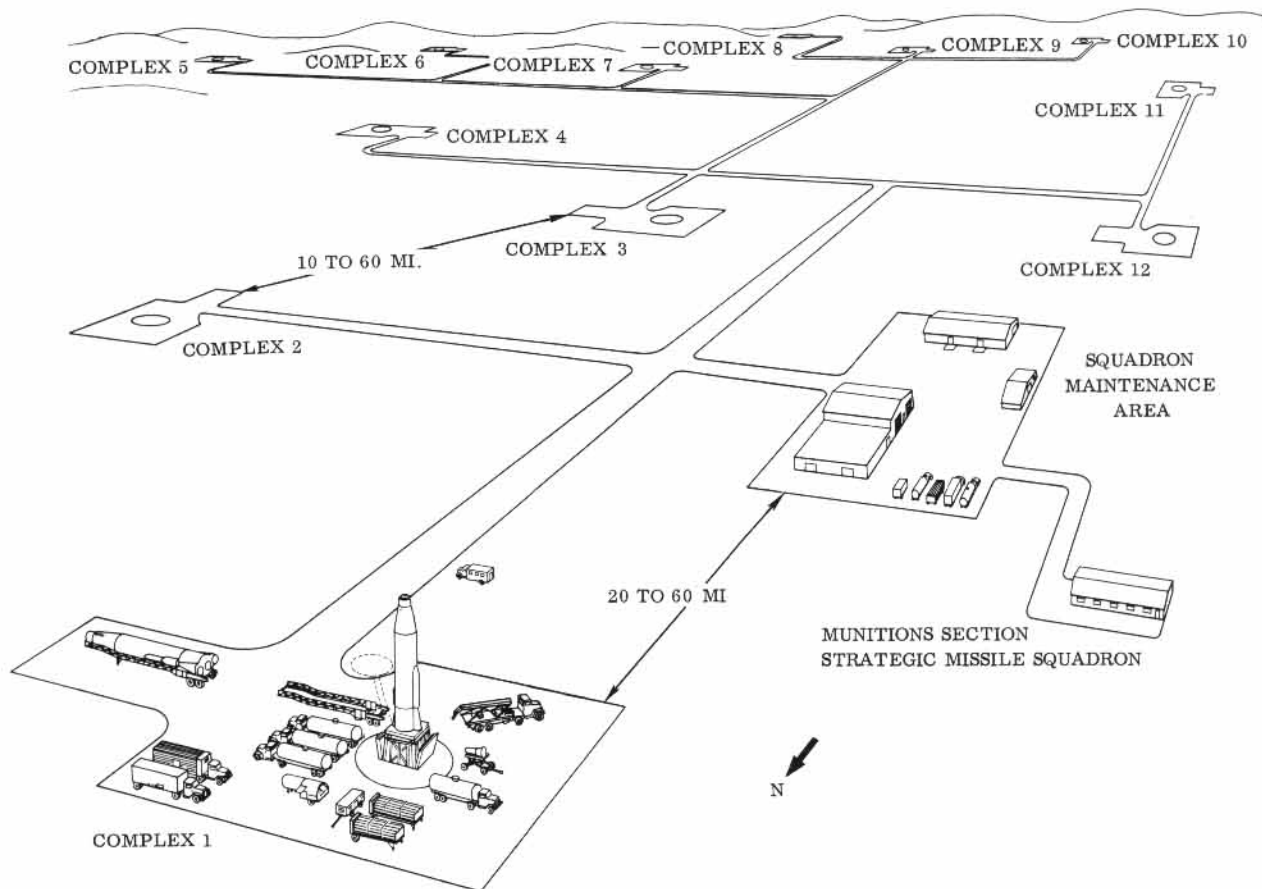


TYPICAL SILO BASE LAYOUT

## TYPICAL LAUNCH COMPLEX

A typical launch complex is shown in cutaway on the opposite page. Essentially, the complex consists of two concrete cylinders closed at both ends. Both cylinders are completely below ground level. The larger cylinder, the silo, is over 174 ft. deep and has an inside diameter of about 52 ft. The silo contains an Atlas missile, plus most of the structures, facilities and equipment needed to launch it. The other cylinder, called the launch control center, is approximately 27 ft. deep and is about 40 ft. in diameter. The launch control center contains living quarters and facilities for the launch crew, plus the equipment to monitor the operational readiness of the silo and launch its missile.

The silo and launch control center are connected by a cylindrical tunnel about 54 ft. long and about 8 ft. in diameter. This tunnel serves as a conduit for the launch control cabling, and provides access to the silo. Together, the silo and launch control center form a self-contained combat unit, with food, water and power. In the launch-ready configuration the ground level opening in the silo roof is sealed by blast-proof concrete doors. During a missile launch these doors are opened and the missile is lifted to ground level.

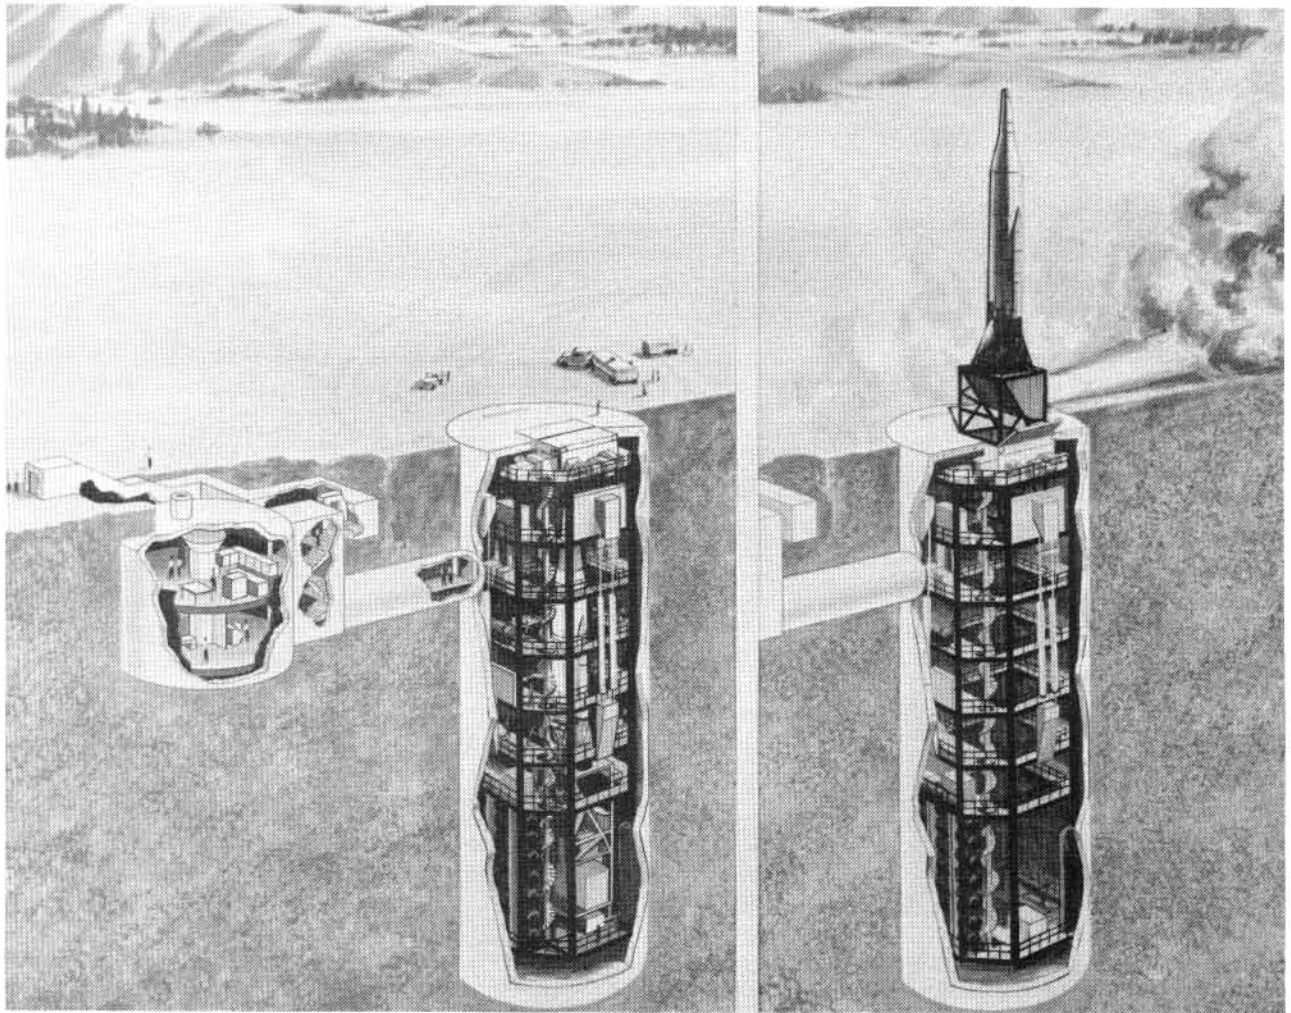


TYPICAL LAUNCH COMPLEX

V. FACILITY AND GROUND SUPPORT EQUIPMENT

## SILO

The silo (see opposite page) is an 11-story building situated completely below ground. Its floor, walls and roof, which are of reinforced concrete, form a cylinder measuring over 174 ft. long and about 52 ft. in diameter. Inside this cylinder is a structural steel crib. The crib, which is octagonal in cross-section, contains eight floor levels. On these levels are mounted the storage tanks, machinery, control cabinets and other items of support equipment needed for the Atlas missile that is stored in and launched from the silo. Passing vertically through the levels of the crib are two square shafts. The larger shaft is for the launcher platform, on which the missile is lowered into the silo for storage and raised above ground level for launching. The smaller shaft contains a utility elevator for maintenance personnel and equipment movement. The crib is suspended from the silo walls on spring-loaded shock struts designed to cushion the crib and its contents against the shock of a nuclear blast. In the silo roof, which is flush with ground level, is a square opening sealed by blast-resistant doors. Through this opening, which is aligned with the launcher platform shaft, the missile is lowered into and raised out of the silo. Access to the silo for personnel is through a cylindrical concrete tunnel connected to the launch control center. Except during maintenance, operation of the equipment in the silo is remotely controlled and monitored from the launch control center.

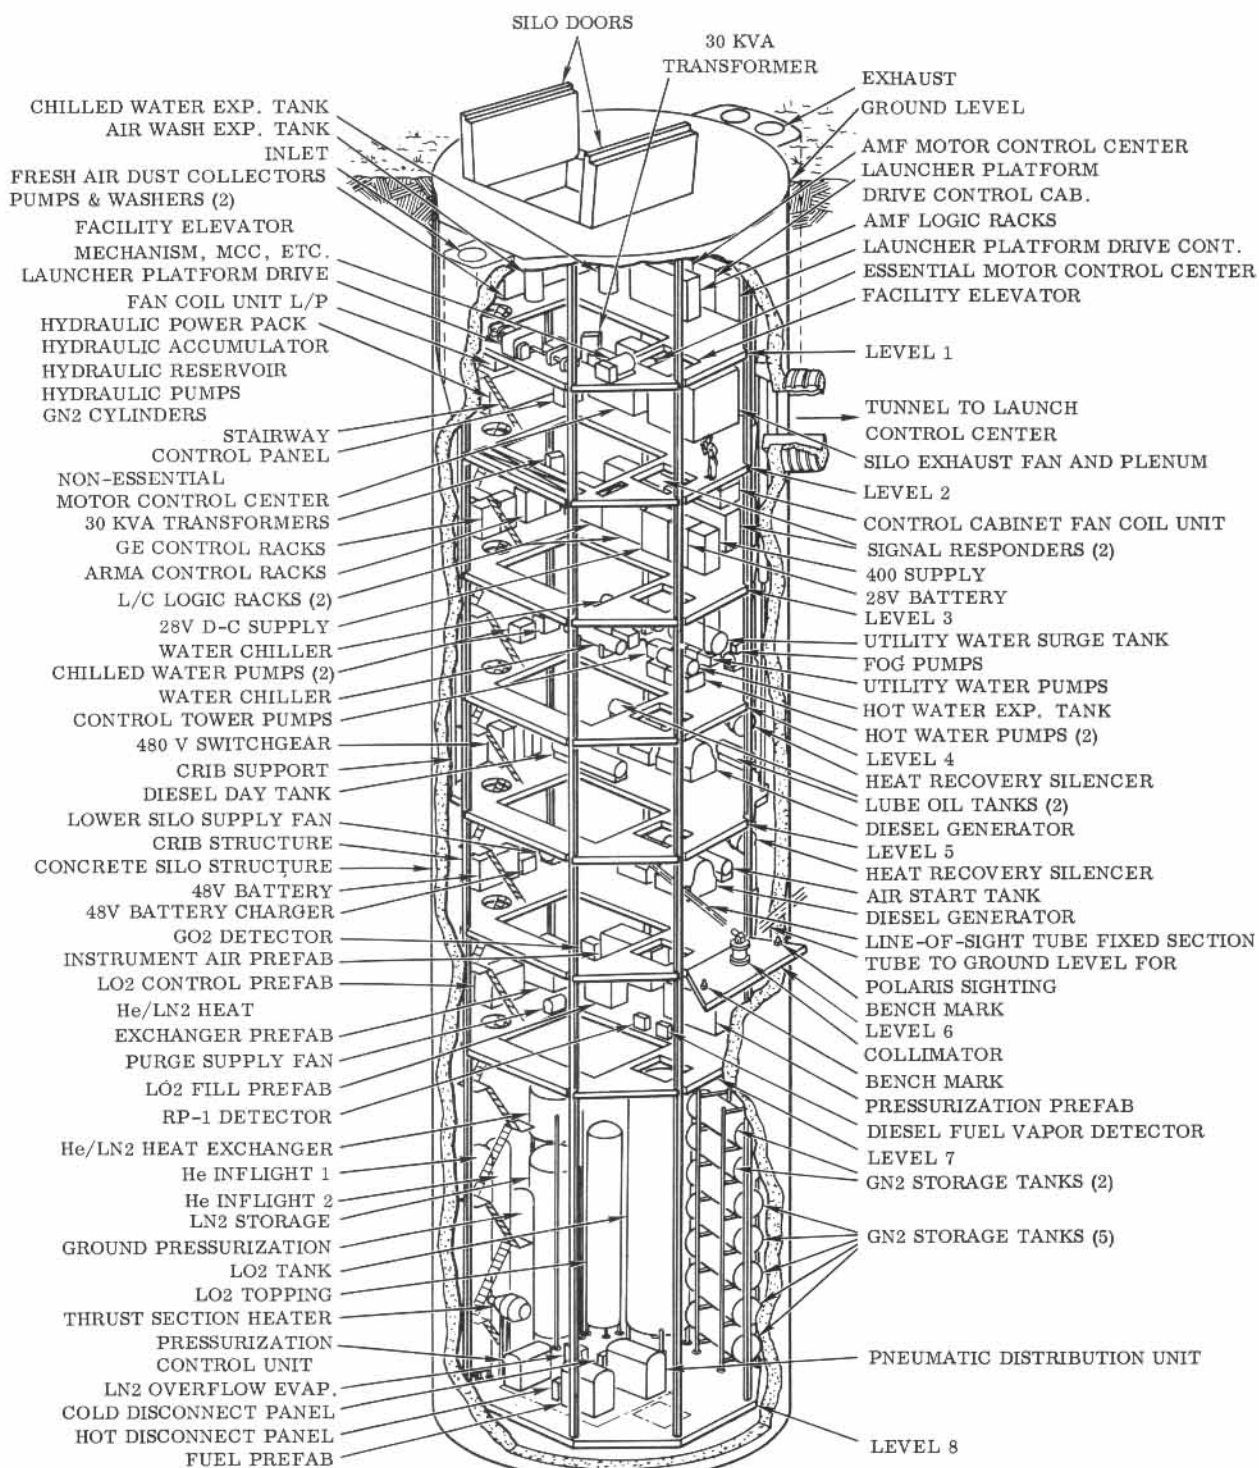


SILO

## LAUNCHER PLATFORM

The launcher platform is an open cage-type, multiple-level elevator on which a missile is lowered into and raised out of the silo. The platform is 16 ft. square and 49 ft. high, and weighs approximately 171,500 lb.

It is suspended on 10 cables within the silo crib. The platform structure consists of four levels. On the first level, which is above ground when the platform is raised, are the missile launcher and flame deflector. The second level holds the launcher platform locking system, which anchors the platform to the silo walls when it is raised, and to the crib structure when it is lowered. The third and fourth levels contain equipment for servicing the missile while the launcher platform is rising during a countdown.




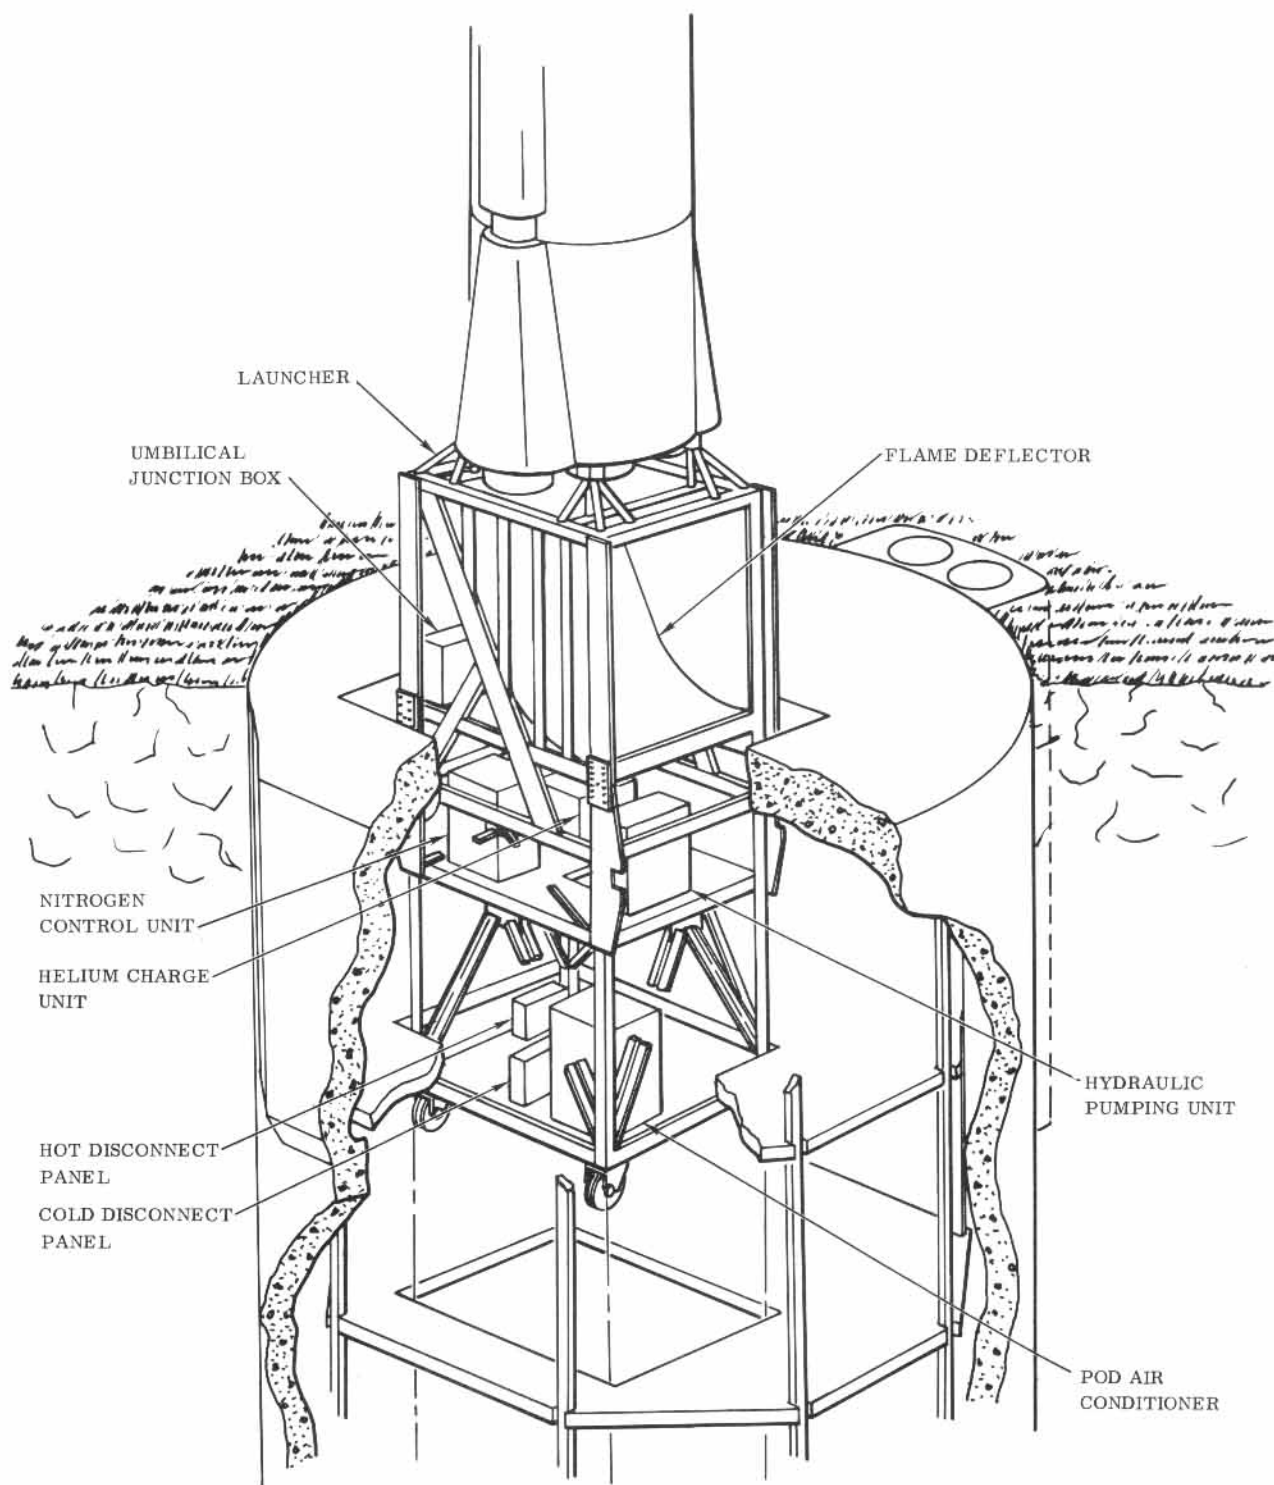

LAUNCHER PLATFORM

## LAUNCH CONTROL CENTER

The launch control center is a cylindrical chamber of reinforced concrete about 27 ft. high and about 40 ft. in inside diameter. Built completely below ground, the chamber contains two floor levels supported by an air-cushioned suspension system designed to cushion against the ground shock of a nuclear blast. The rooms on the lower level contain the facility and launch control equipment used by the operating crew of a single launching silo. The rooms on the upper level contain living quarters and facilities for the crew. The launch control center is connected to its silo by a cylindrical concrete tunnel some 54 ft. long and about 8 ft. in inside diameter. Access from ground level to both the launch control center and the tunnel is through a blast-resistant concrete stairwell. Emergency exit can be made through an escape hatch in the launch control center roof.

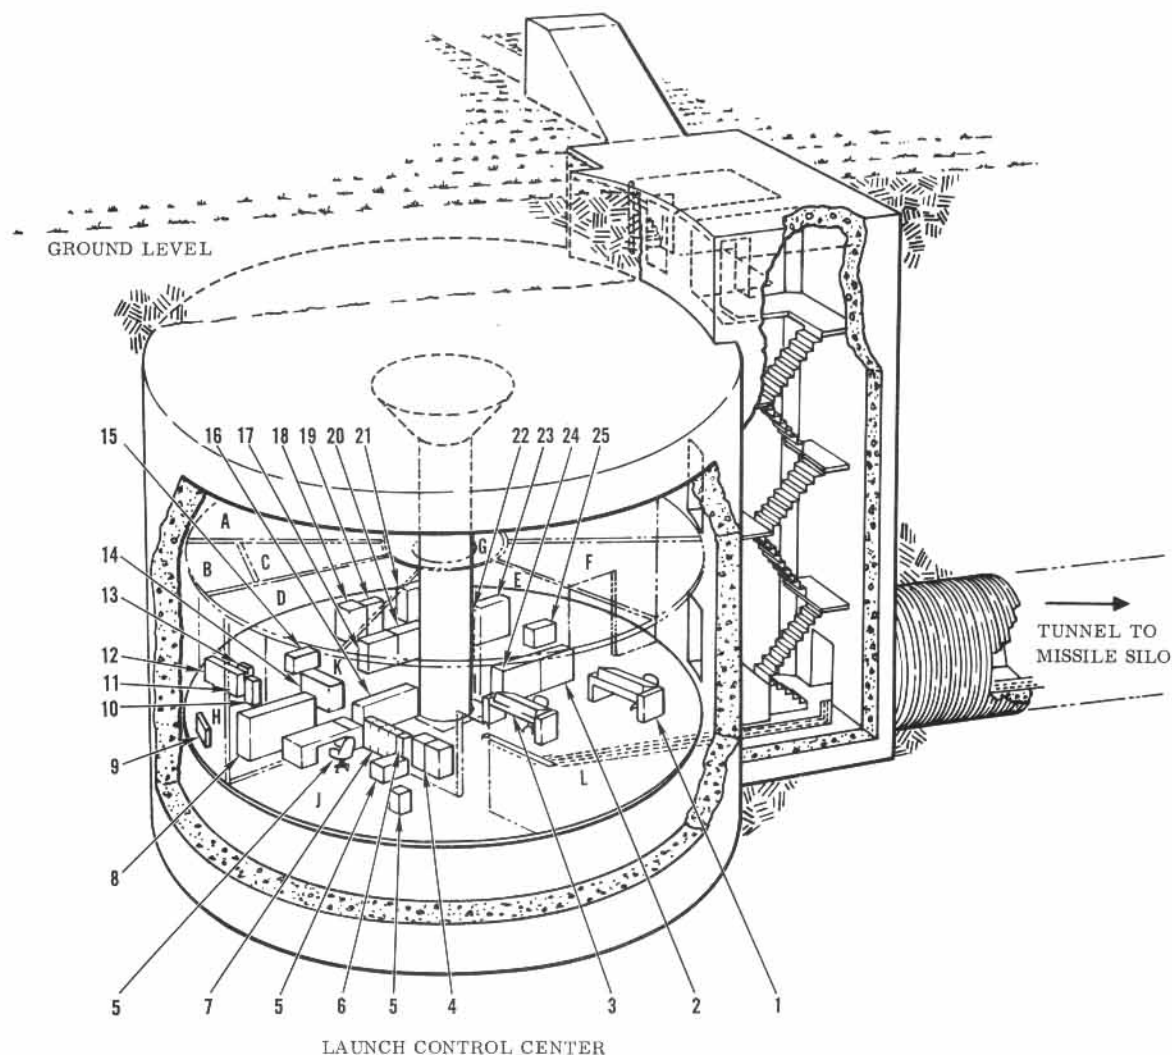

LAUNCH CONTROL CENTER

AREA KEY

FIRST LEVEL

- A READY ROOM & STORAGE
- B JANITOR'S ROOM
- C MEDICAL SUPPLY ROOM
- D TOILET
- E KITCHEN & MESS
- F POWER DISTRIBUTION ROOM
- G HALL

SECOND LEVEL

- H BATTERY ROOM
- J OFFICE
- K COMMUNICATIONS EQUIPMENT ROOM
- L LAUNCH CONTROL ROOM




EQUIPMENT KEY

- 1 ALTERNATE COMMAND CONSOLE (ONE PER SQUADRON)
- 2 POWER PLANT REMOTE CONTROL PANEL
- 3 LAUNCH CONTROL CONSOLE
- 4 TV MONITOR
- 5 OFFICE EQUIPMENT
- 6 LIGHTING DISTRIBUTION TRANSFORMER
- 7 FIRE ALARM PANEL
- 8 BATTERIES & RACK
- 9 TELEPHONE TERMINAL CABINET
- 10 CHARGER BAY
- 11 COMMUNICATION POWER DIST. PANEL
- 12 PA SYSTEM CABINET
- 13 COMMUNICATION EQUIP. PANEL "B"
- 14 MAIN DISTRIBUTION FRAME
- 15 MISCELLANEOUS TRUNK BAY (DIRECT LINES)
- 16 MOTOR CONTROL CENTER
- 17 FINDER CONNECTOR BAY
- 18 POWER BOARD
- 19 MISCELLANEOUS RELAY RACK
- 20 SELECTOR BAY
- 21 X-TIME CLOCK BAY
- 22 REGISTER BAY
- 23 TRANSLATOR BAY
- 24 FACILITY REMOTE CONTROL PANEL
- 25 SASS BAY

LAUNCH CONTROL CENTER

### LUBE OIL AND FUEL OIL SYSTEM


This system stores and distributes the fuel and lubricant required by the two diesel generators that supply facility electrical power for both the silo and the launch control center. The amount of oil stored in this system is a primary determinant of the length of time a launch complex can remain operationally independent.

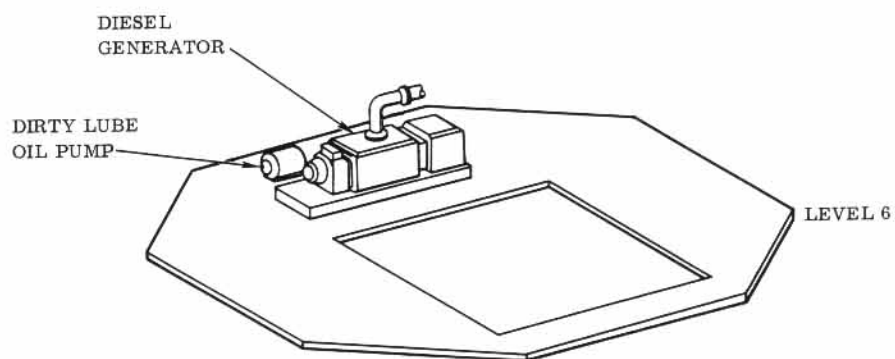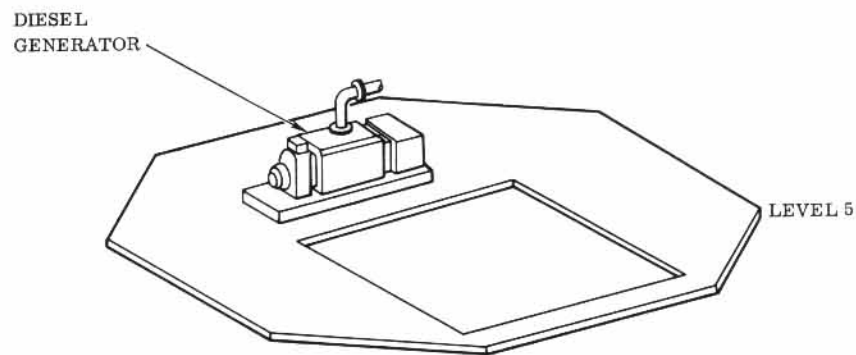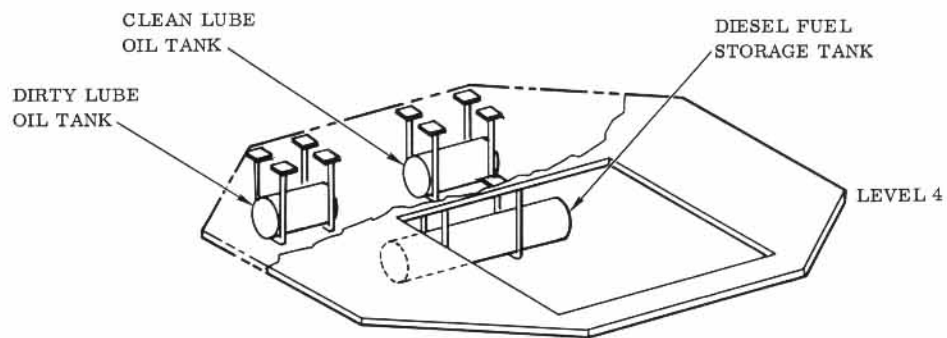

LUBE OIL AND FUEL OIL SYSTEM

## HEATING, VENTILATING AND AIR-CONDITIONING SYSTEM

This system continuously pumps a supply of fresh, washed air into the silo, heats or cools the air as required, and distributes it throughout the silo. Part of the system maintains constant temperature inside the shaft that encloses the launcher platform. The system also continuously expels stale air, fumes and vapors from the silo.

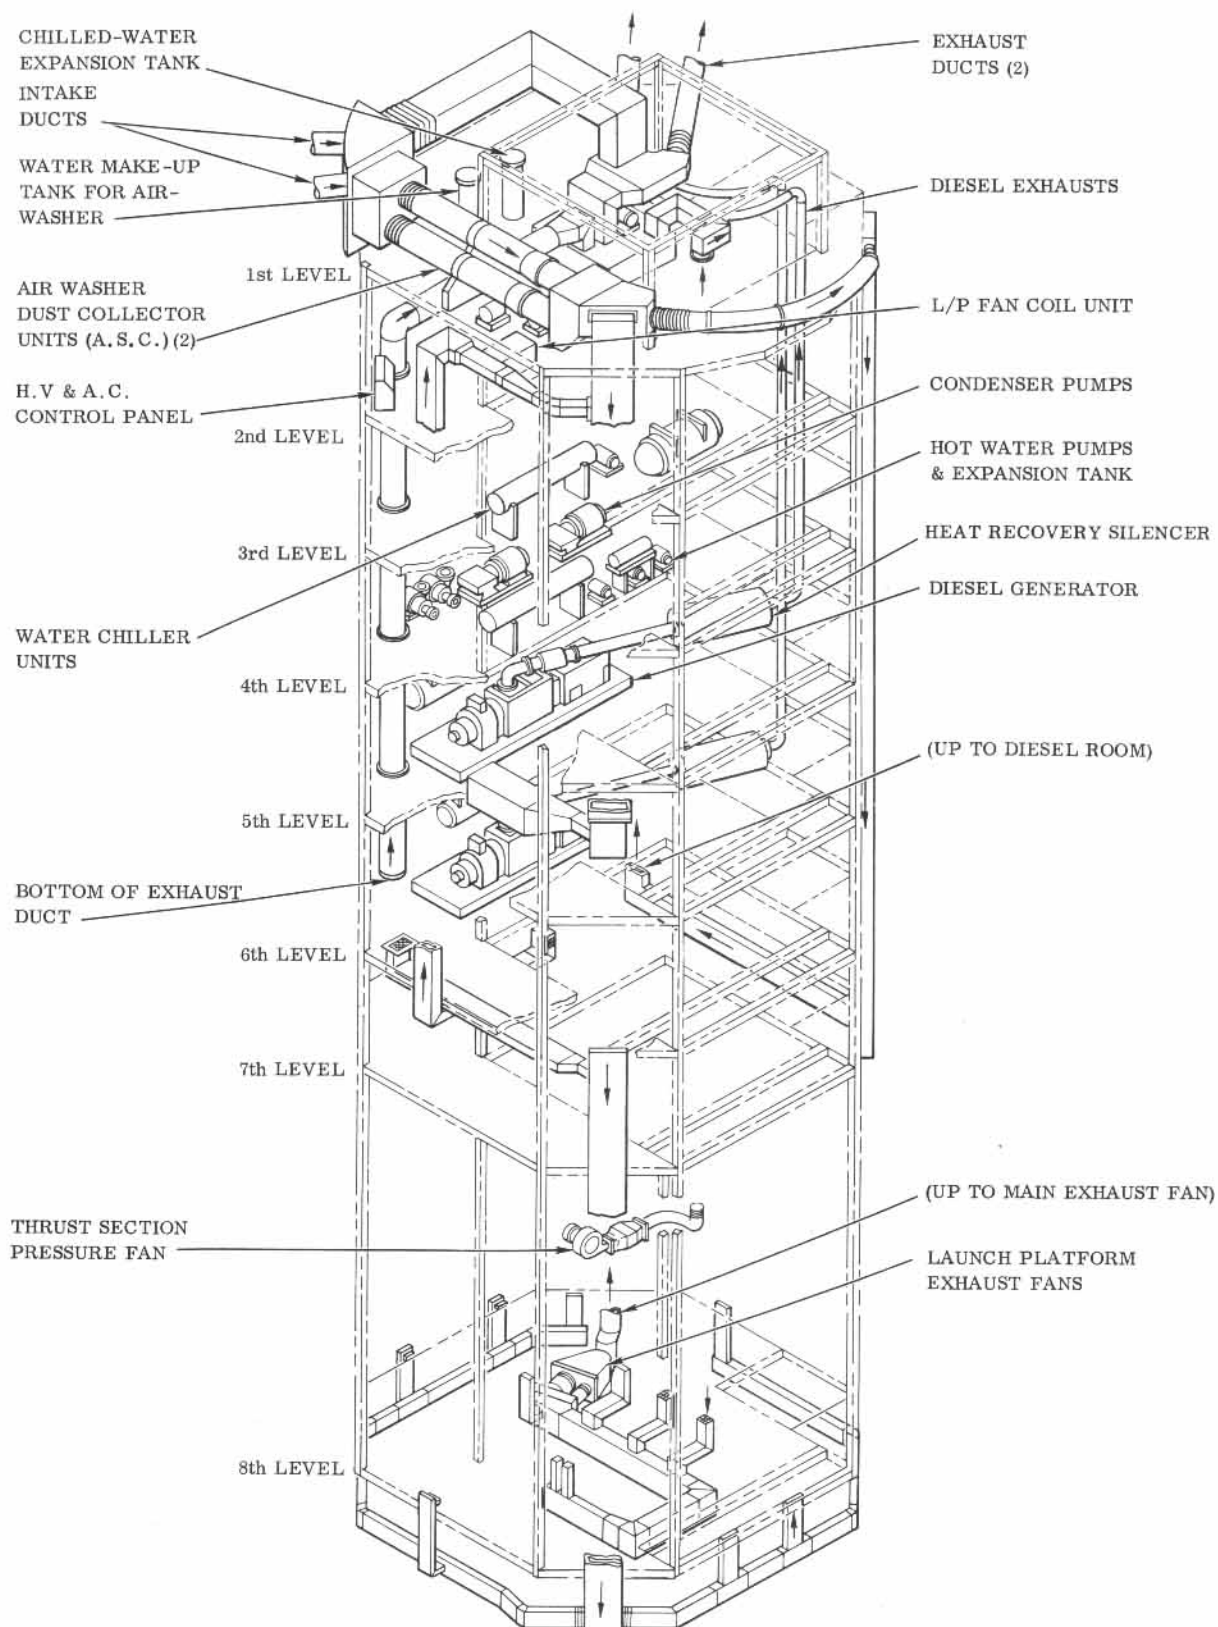


HEATING, VENTILATING AND AIR-CONDITIONING SYSTEM

## UTILITY WATER SYSTEM

The utility water system provides the water for personnel, fire protection, and the air-conditioning system in both the silo and the launch control center.




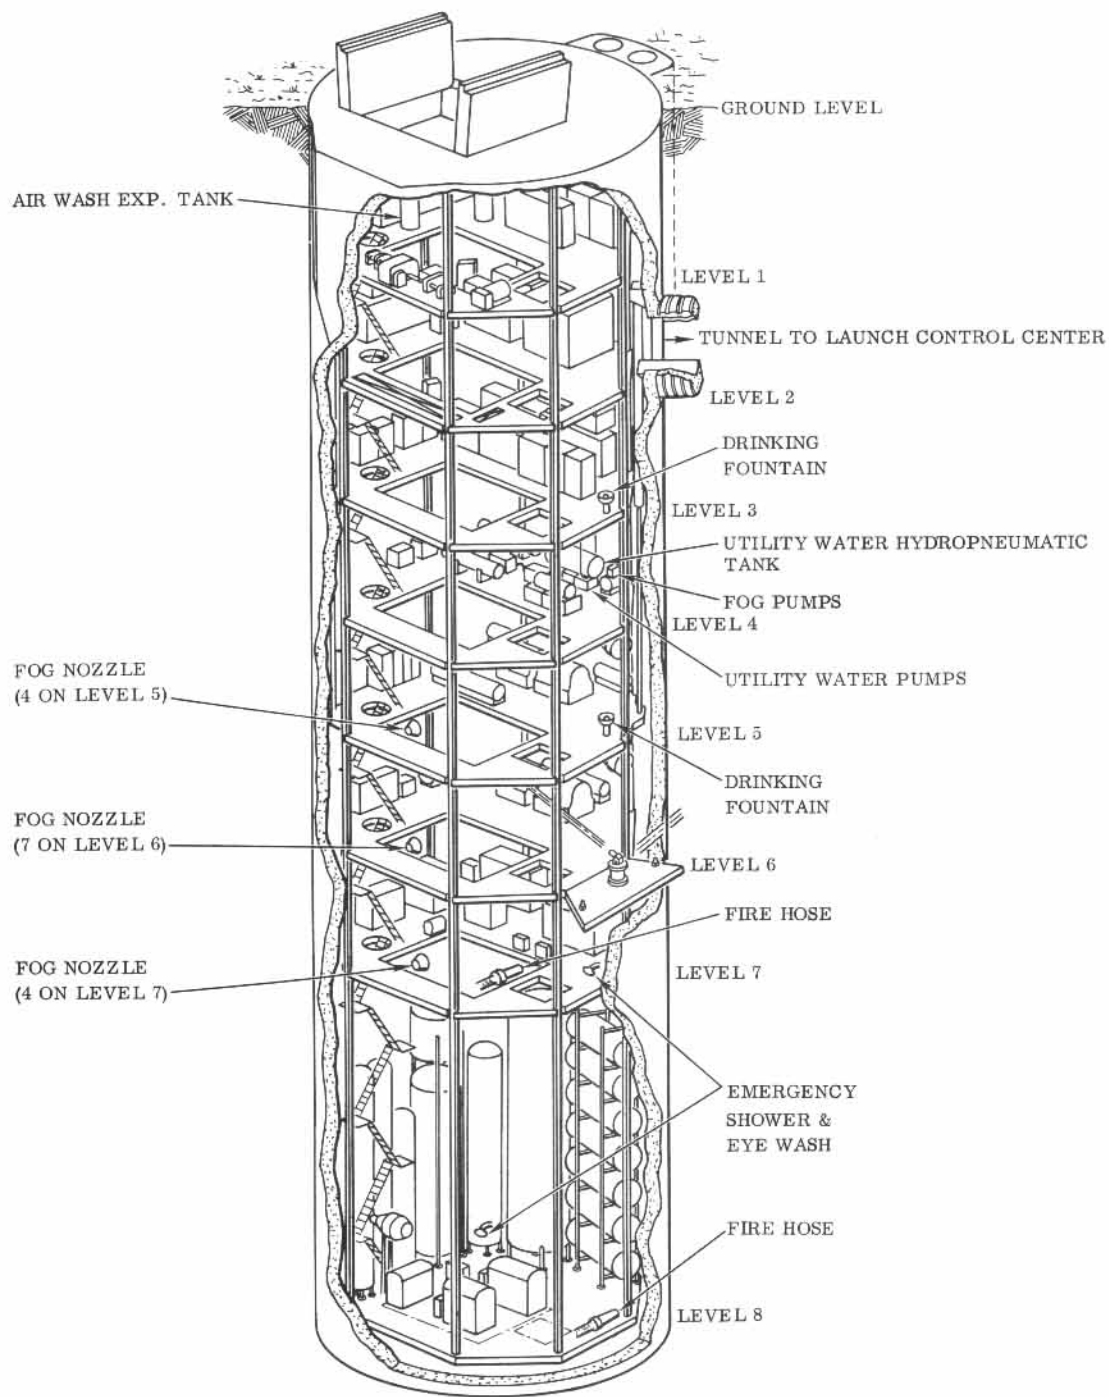

UTILITY WATER SYSTEM

## DETECTION SYSTEMS


There are five detection systems at each launch complex: the fire alarm system, which detects and provides alarm signals in the event of fire; the gaseous oxygen detection system and the diesel fuel vapor detection system. These systems give both a visual and an audible warning if they detect critical concentrations of gaseous oxygen or diesel fuel vapor in the silo. Another detection system senses the presence of missile fuel vapor in the silo, gives a visual and audible warning, and causes the release of water fog which suppresses the vapor. Fifth is the blast detection system; this system consists primarily of a light-sensitive detector, mounted above ground level at the launch complex, which is sensitive only to high-intensity light, such as the flash of a nuclear explosion. Upon sensing such a flash, the detector sends a signal to a cabinet in the launch control center. This signal closes blast protection doors in the ventilator ducts, and at other passages with openings at ground level, before the blast forces of the explosion.

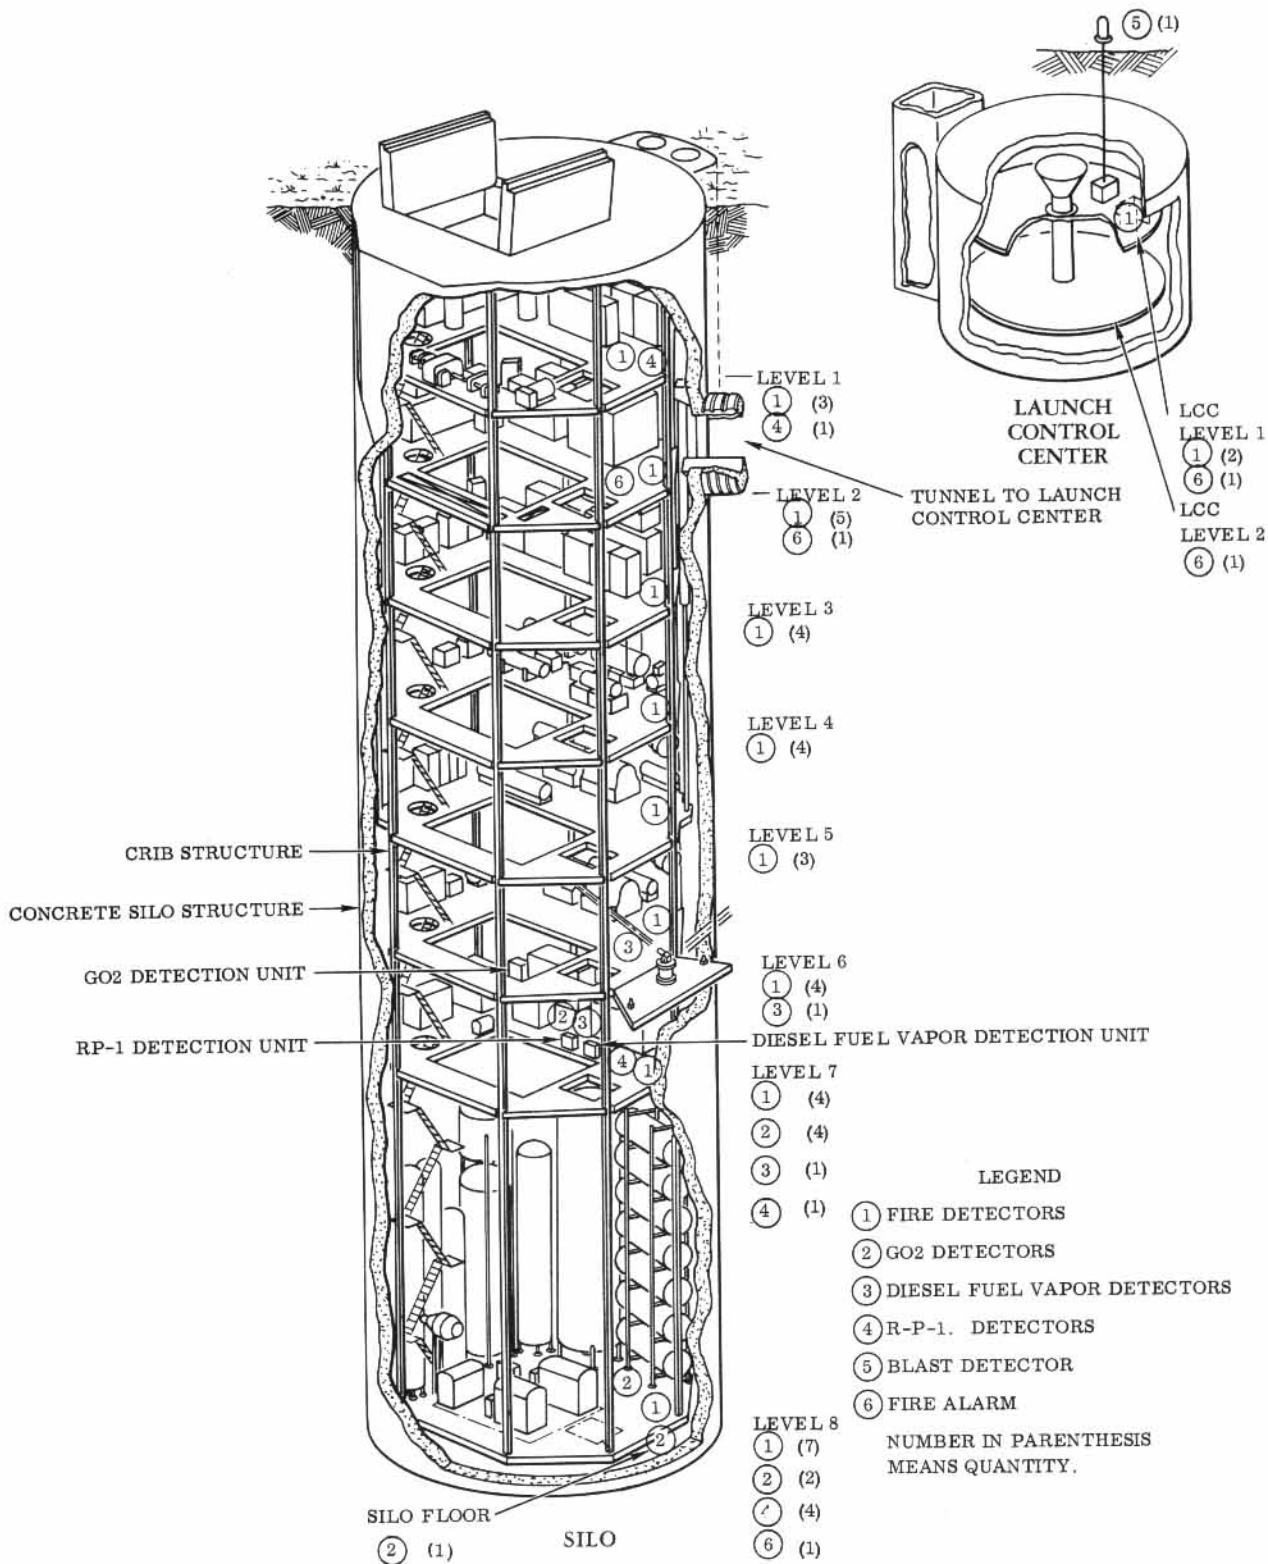

## DETECTION SYSTEMS


## COMMUNICATION SYSTEMS

Each launch complex has a telephone system and a public address system. The telephone system interconnects the launch control center with all entrances to the launch complex and with the eight levels in the silo. Calls can be placed, via the launch control officer's console, from one silo level to another. Public address system inputs from the launch control center reach all areas of the launch complex.

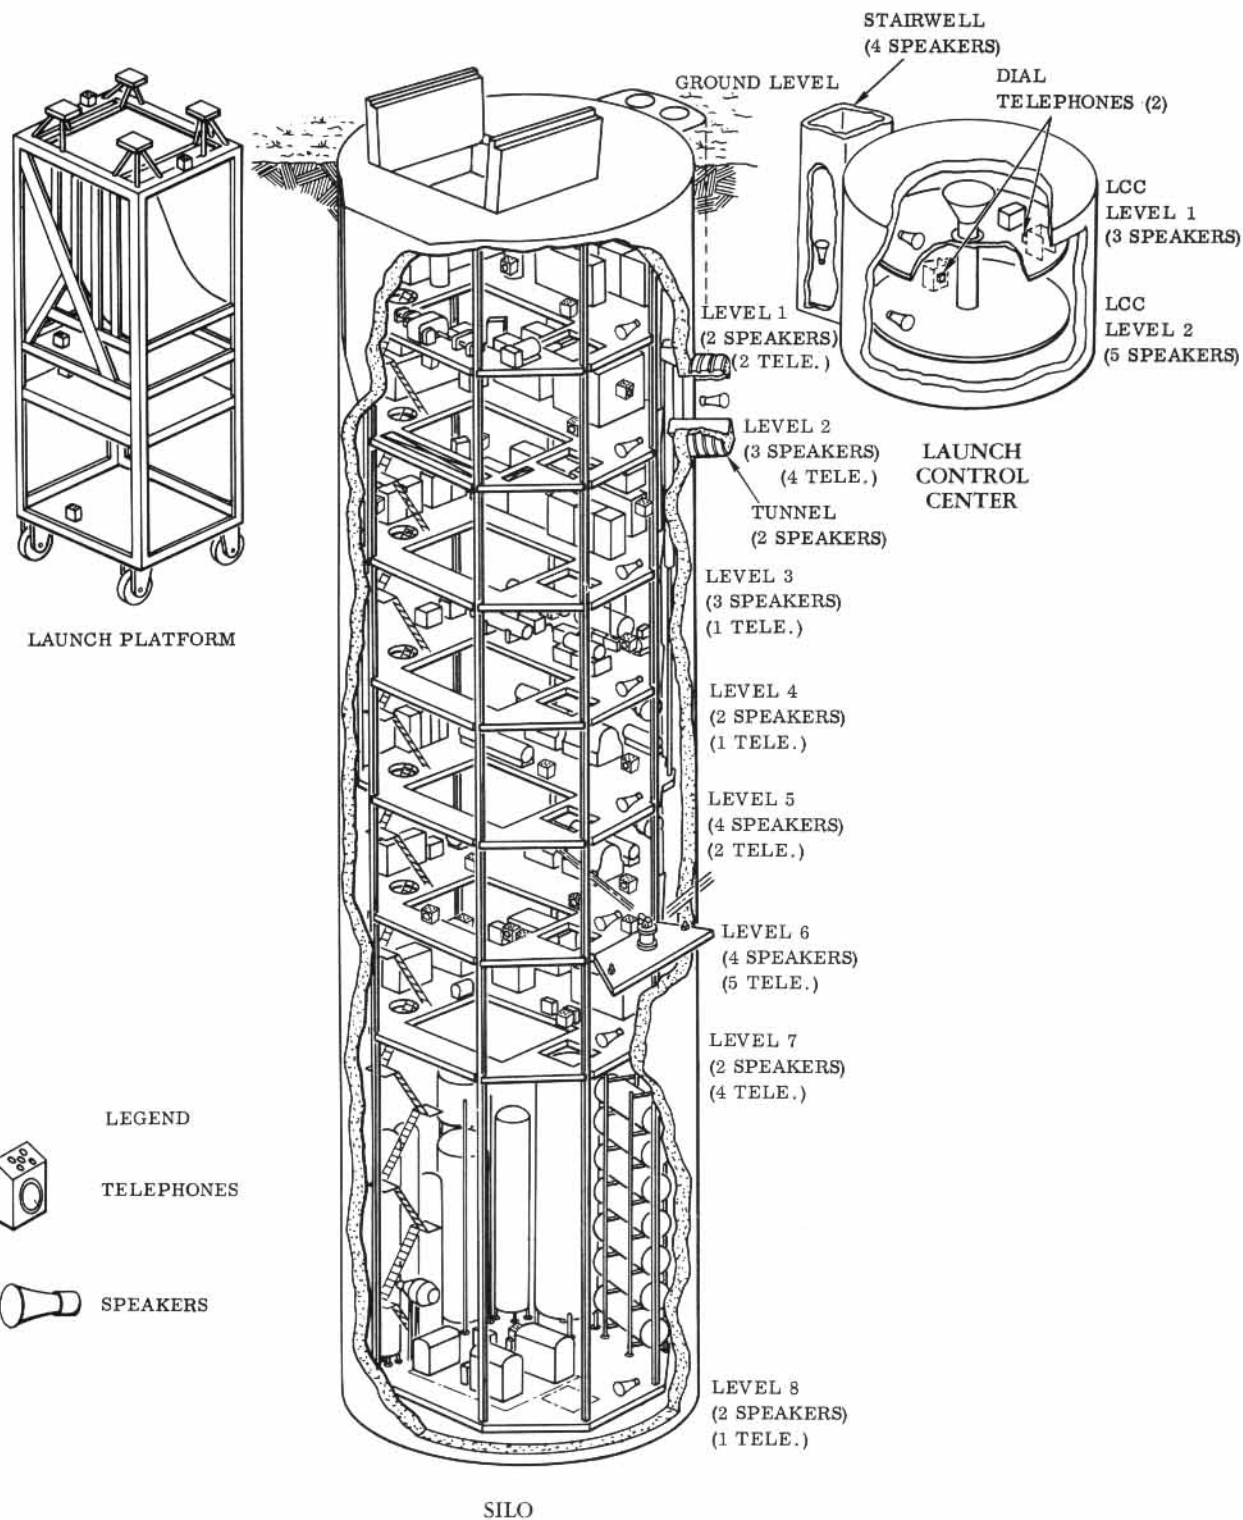

### SILO CRIB SUSPENSION SYSTEM

The major components of this system are four wall brackets and four pairs of spring-loaded shock struts. The wall brackets are mounted 90° apart on the silo wall, above the second level of the crib. The upper ends of each pair of shock struts are attached to a wall bracket, and the lower ends are attached to the crib at a point between the fifth and sixth levels. Each shock strut is 60 ft. long and consists of from 5 to 7 sets of concentric springs mounted on a central rod. Spring retainers on the rod transfer equal crib loads of each spring on the strut. The entire weight of the crib structure and its contents, including the launcher platform and missile, is suspended on the struts. Total weight is more than 1,500 tons. The system cushions the missile and its support equipment against the ground shock of a near-miss nuclear blast. Hydraulically actuated locks in the system anchor the crib structure to the silo walls during launcher platform operation.

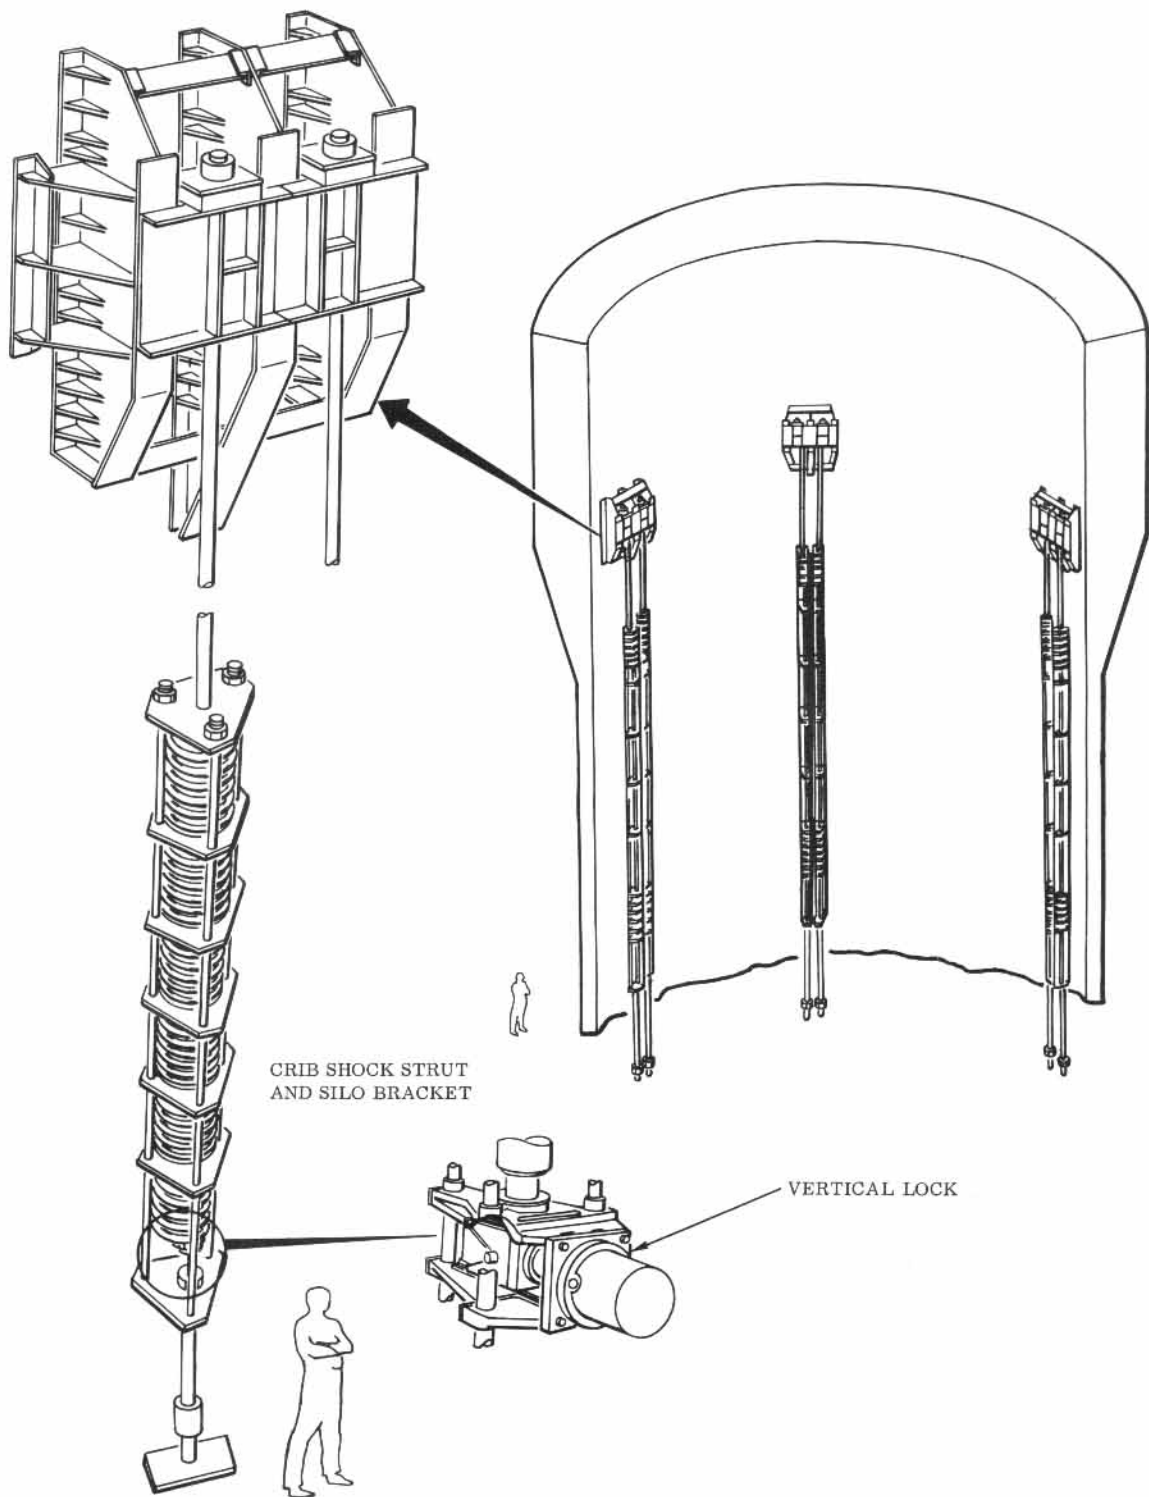


SILO CRIB SUSPENSION SYSTEM

## LAUNCHER PLATFORM DRIVE SYSTEM

The launcher platform drive system raises and lowers the launcher platform along a set of guide rails attached to the inner sides of the launcher platform shaft structure. The drive system includes a drive mechanism, a launcher platform counterweight, 10 wire ropes, and a tension equalizer. The drive mechanism consists principally of two 125-hp electric motors, two reduction gears and two traction sheaves. The launcher platform counterweight, which has its own shaft and guide rails, is a stack of iron and steel slabs surmounted by two sheaves. The counterweight weighs 536,000 lb. The wire ropes are grouped in two sets of five ropes anchored to crib structure directly below the drive mechanism located on crib level No. 1. The opposite ends are attached to the tension equalizer, a teeter bar assembly anchored to crib structure above level No. 1. This assembly equalizes the tension between the sets of wire ropes.




LAUNCHER PLATFORM DRIVE AND BASE ASSEMBLY

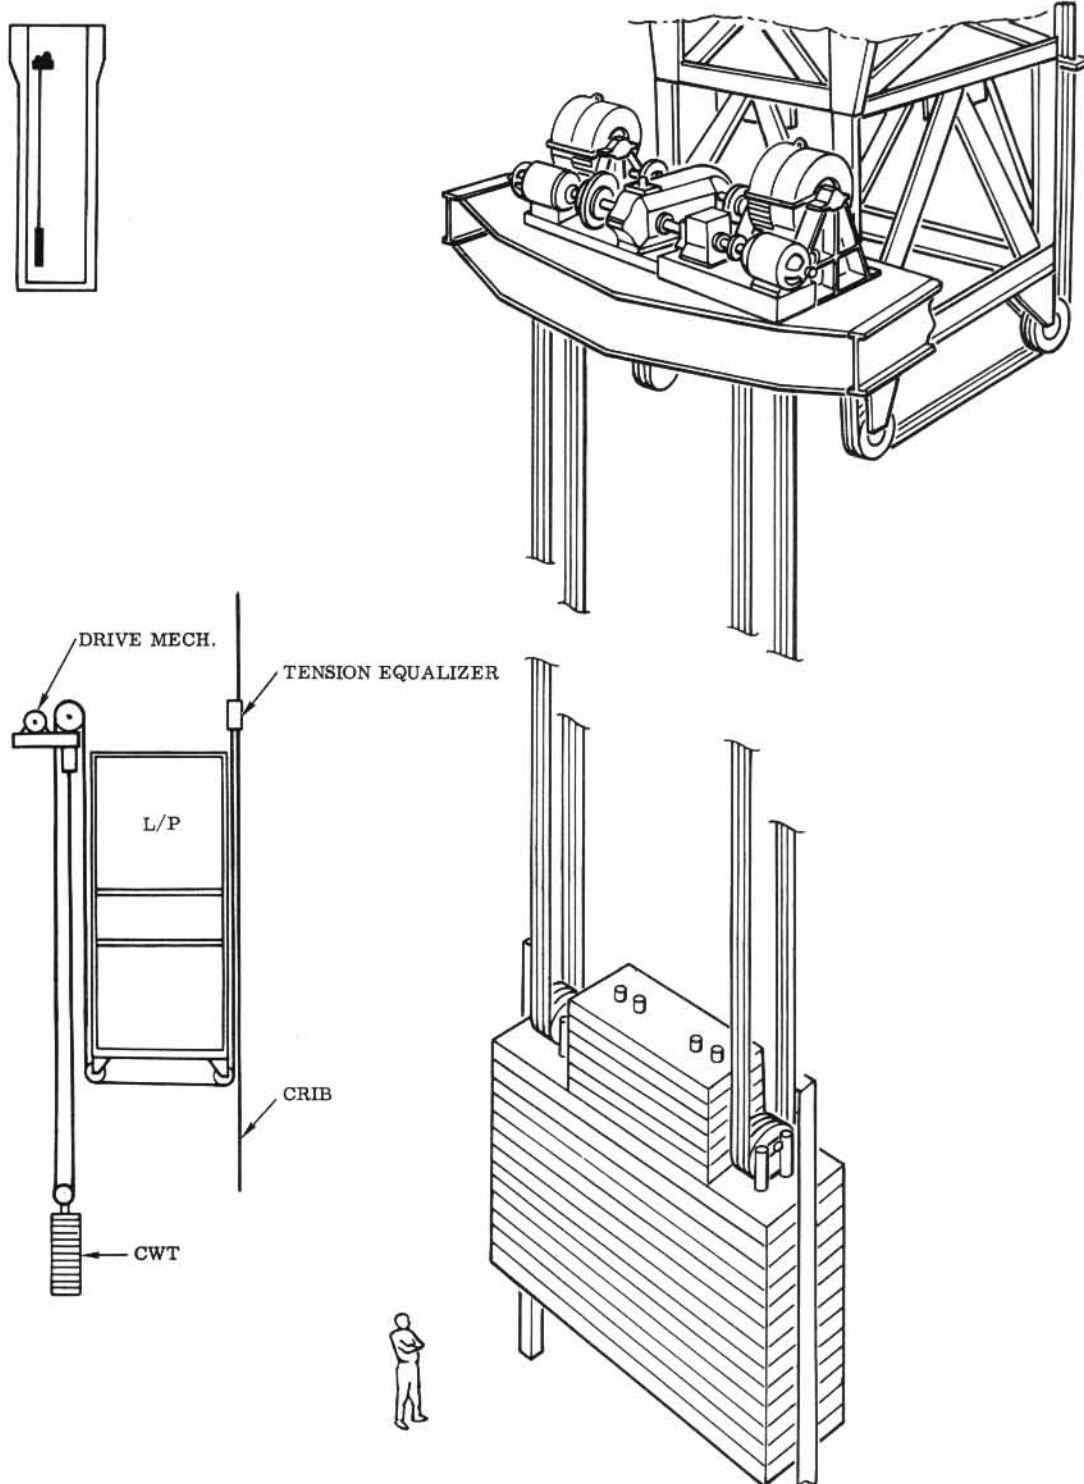

LAUNCHER PLATFORM DRIVE SYSTEM

### PROPELLANT LOADING SYSTEM


The propellant loading system consists of the silo-mounted storage tanks, control units and tubing which supply fuel and liquid oxygen to the missile (see illustration on opposite page). Fuel is loaded aboard the missile through fill lines connected to a tank truck above ground. The fuel then remains aboard the missile until the missile is launched or replaced. Two Dewar-type tanks in the system store liquid oxygen, which is transferred to the missile during countdown operations.

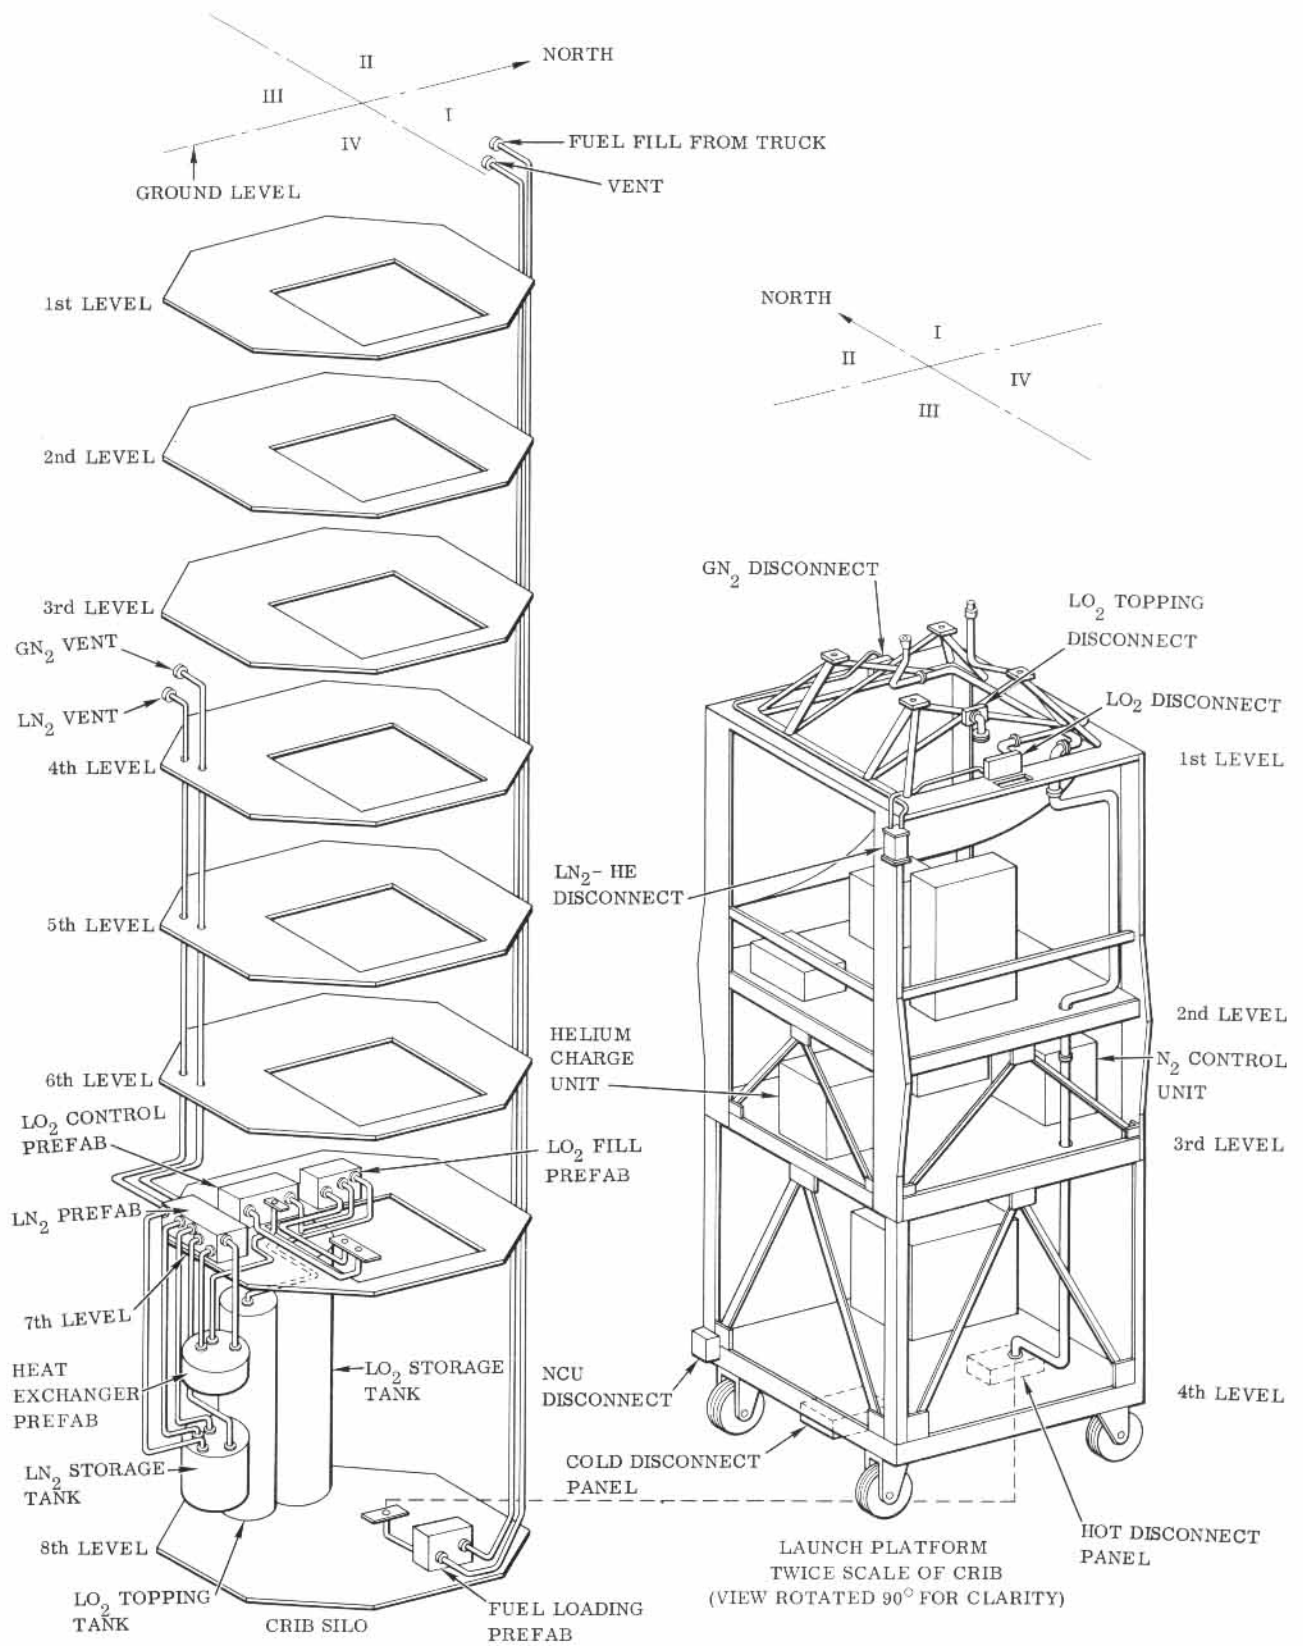

PROPELLANT LOADING SYSTEM

## PNEUMATIC SYSTEM


The pneumatic system includes the silo-mounted equipment used in the storage, control and transfer of gases. (See illustration on opposite page.) Gaseous nitrogen handled is used in missile propellant transfer, silo hydraulic equipment operation, and missile maintenance. Helium is used for missile tank pressurization.

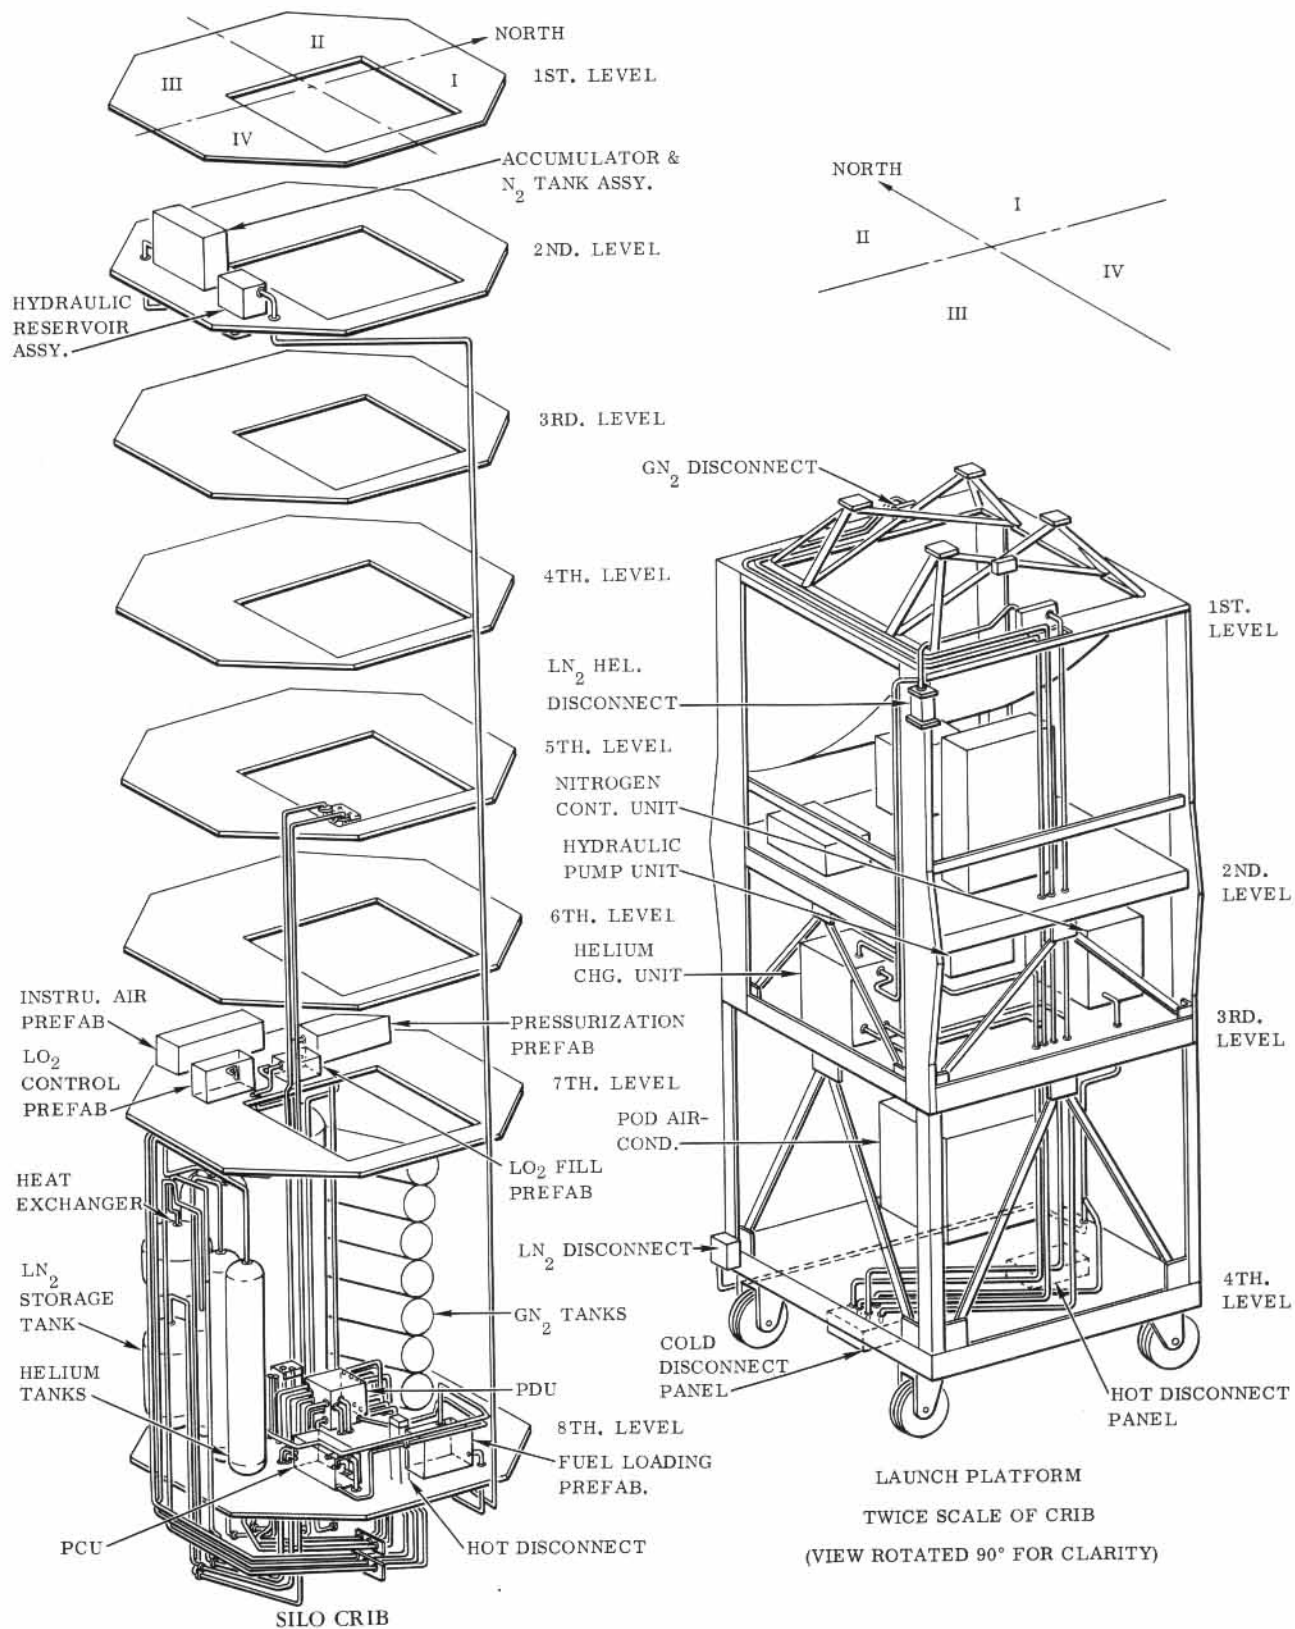

PNEUMATIC SYSTEM

## HYDRAULIC SYSTEM

The hydraulic system consists of the silo-mounted control units, reservoirs, pumps, accumulators, lines and actuators needed for operating hydraulically powered equipment. (See illustration on opposite page.) This equipment includes the crib locks, the work platforms, the launcher platform locking mechanism, and the silo overhead doors. Also included is the hydraulic pumping unit on the launcher platform. This unit supplies hydraulic power to the missile during countdown and checkout operations.

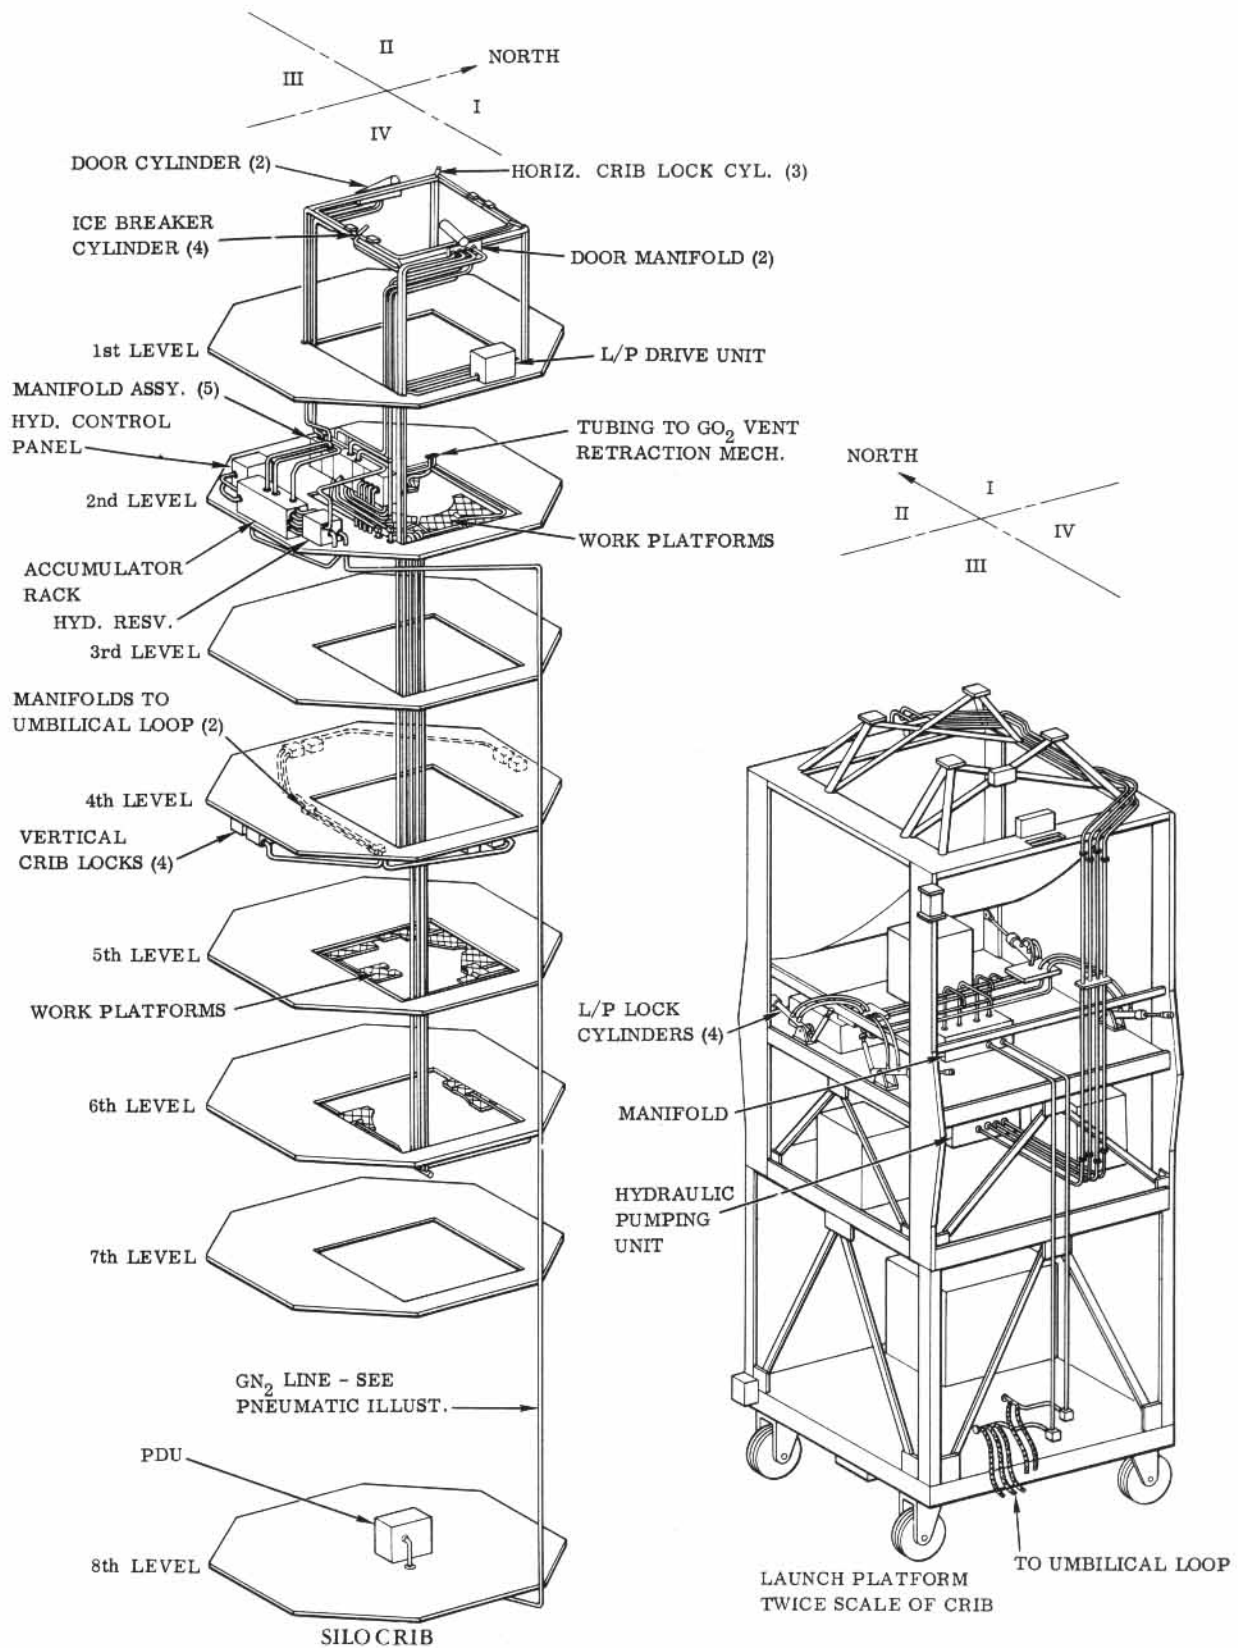


HYDRAULIC SYSTEM

## SILO ELECTRICAL EQUIPMENT

This equipment includes the generators, transformers, rectifiers, batteries, switchgear and cabling needed to make the entire launch complex electrically self-sufficient. Two diesel generators in the silo are the basic source of all electrical power for both the silo and the launch control center. The generators produce 480v 3-phase 60-cycle alternating current. Power is distributed through switchgear to the launch control center and to 480v operating equipment in the silo. This equipment includes pumps and motors, 120/208v transformers, 48v and 28v d-c rectifiers, and a 400-cycle 117v motor generator. Two sets of batteries, charged by rectifiers powered by the diesel generators, provide emergency 48v and 28v d-c power.




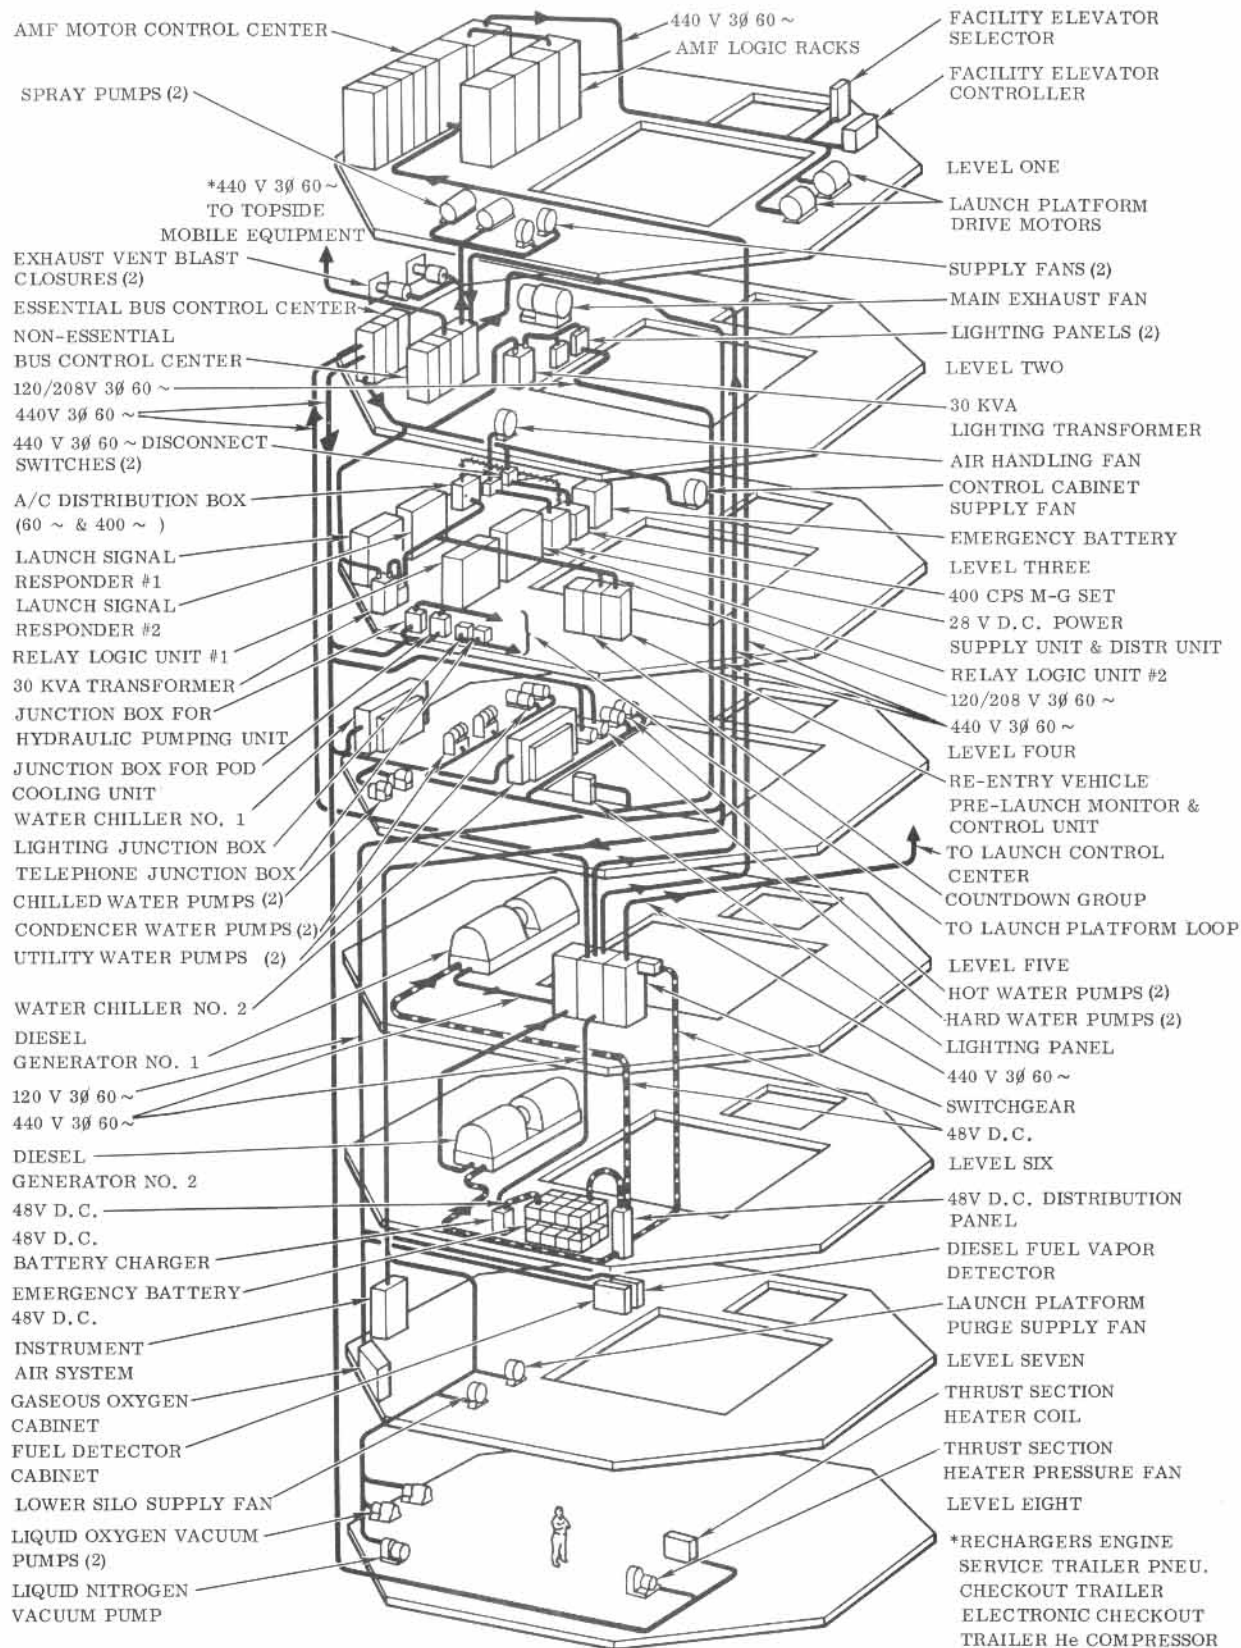

SILO ELECTRICAL EQUIPMENT

## LAUNCH CONTROL CENTER ELECTRICAL EQUIPMENT

The 440v 3-phase 60-cycle a-c power supply for the launch control center is routed through the utility tunnel that connects the launch control center to the silo. Within the launch control center the power is routed to the 440v equipment, and to a 120/208v transformer. The 120/208v power is routed throughout the launch control center. Emergency power is provided by batteries.

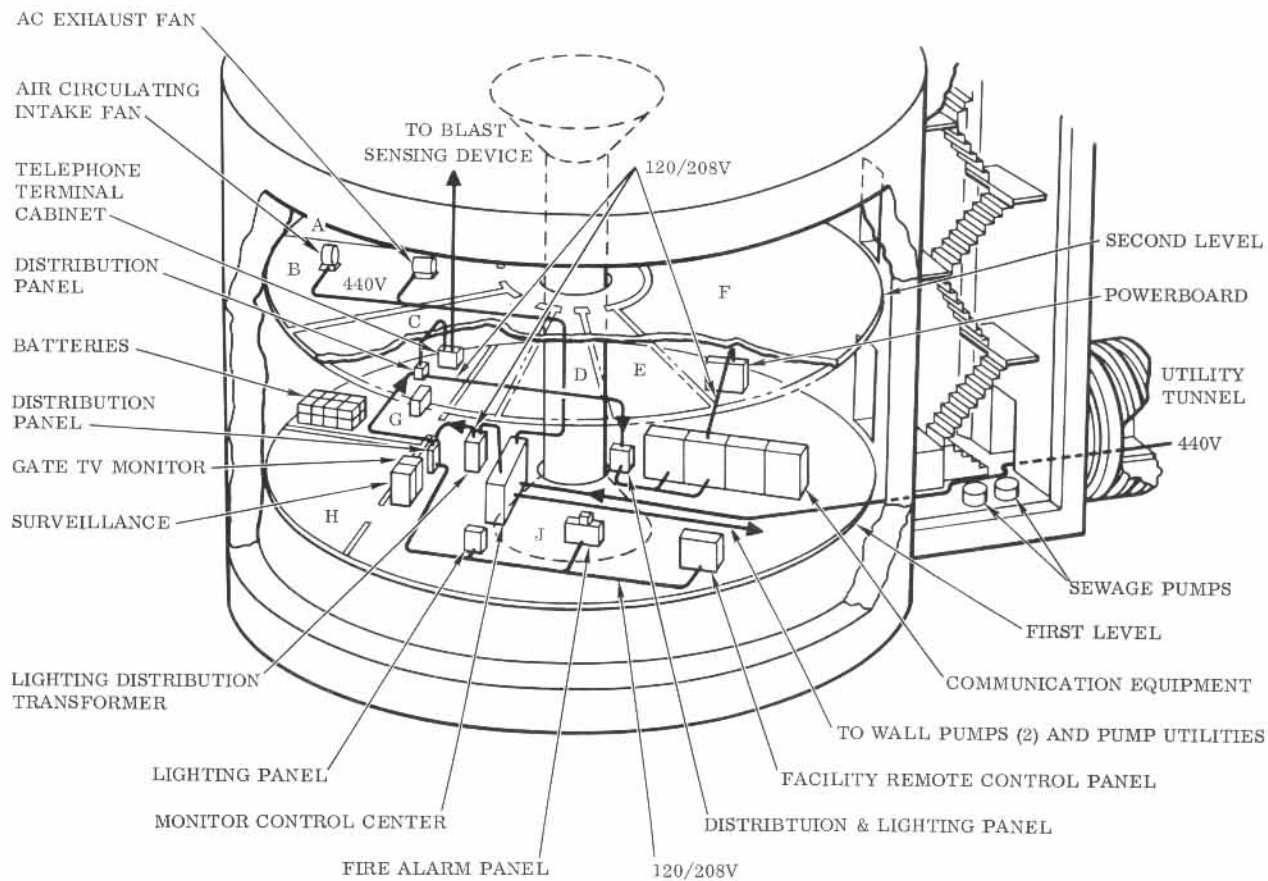


- A SUPPLIES
- B READY ROOM & STORAGE AREA
- C KITCHEN & MESS
- D TOILET
- E JANITOR
- F HEATING, VENTILATING & AIR CONDITIONING EQUIPMENT ROOM
- G BAT. ROOM
- H OFFICE
- J LAUNCH CONTROL ROOM

## LAUNCH CONTROL CENTER ELECTRICAL EQUIPMENT

## GUIDANCE SYSTEM GSE



The guidance system GSE includes a collimator room and two sight tubes. The collimator room, an insulated light-tight chamber, is mounted on the north side of the silo wall at crib level No. 6. Inside the chamber are a collimator assembly and two bench marks. A sight tube leads from ground level down to the north side of the collimator room providing a light path between the collimator and the star Polaris. Periodic fixes made on Polaris and the two bench marks keep the collimator in alignment. The other sight tube leads upward from the opposite side of the collimator room to the missile guidance pod. This tube provides a path for an orienting light beam sent from the collimator to the inertial guidance reference platform aboard the missile. The portion of the tube which extends into the launcher platform enclosure is hinged, and swings out of the way when the missile is raised.

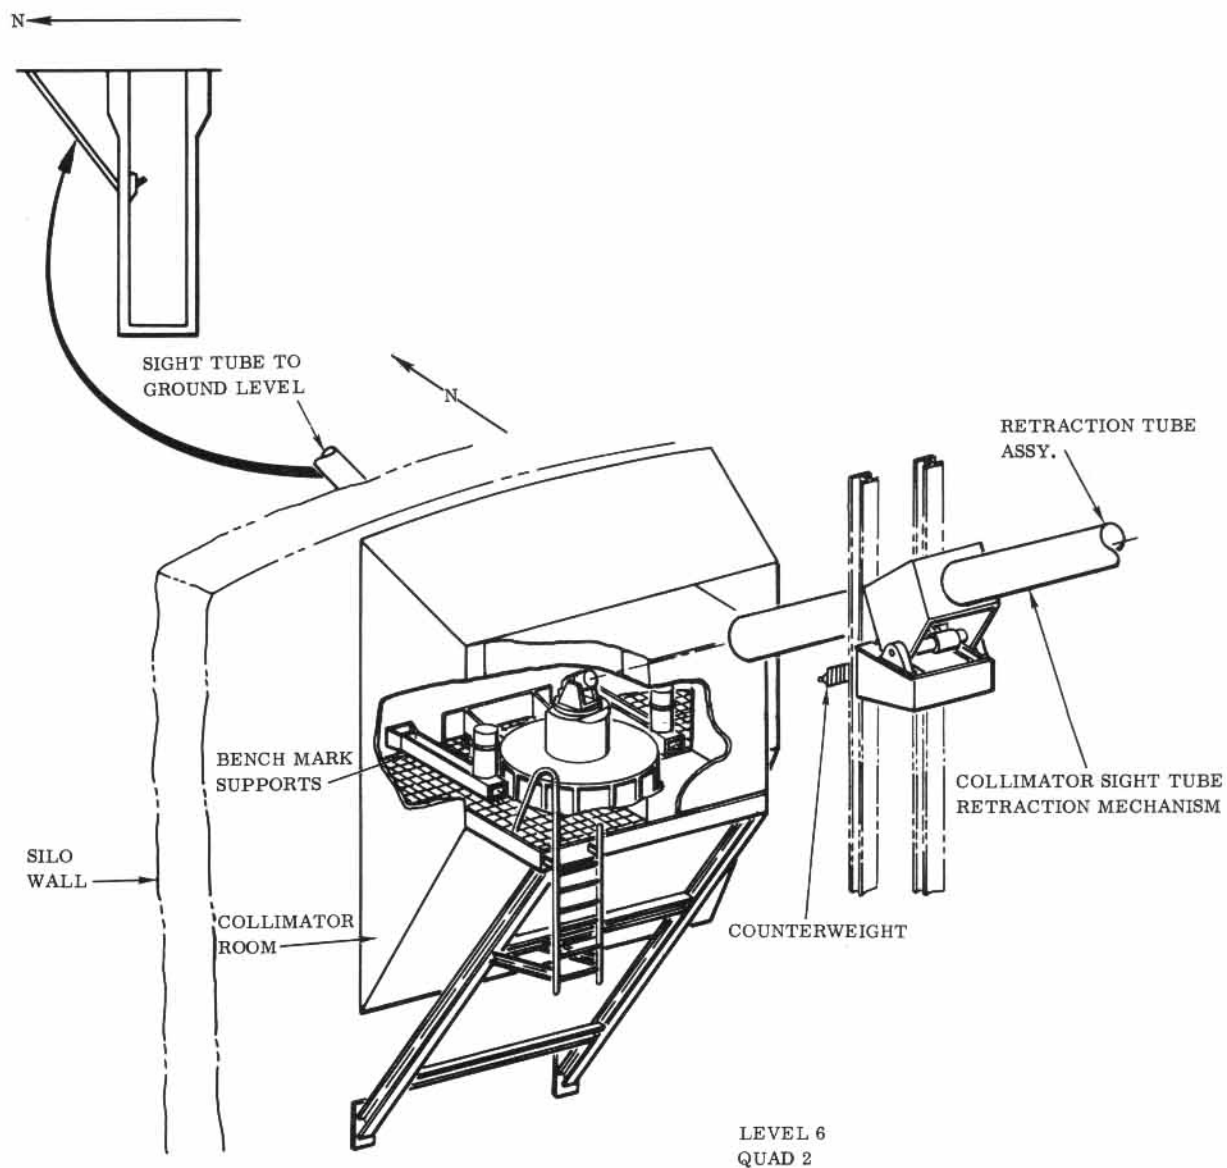

GUIDANCE SYSTEM GSE

### RE-ENTRY VEHICLE GSE

The re-entry vehicle GSE consists of the cabinet shown in the accompanying illustration. The logic units in this cabinet simulate the re-entry vehicle during checkout operations and monitor it during standby and countdown activities.

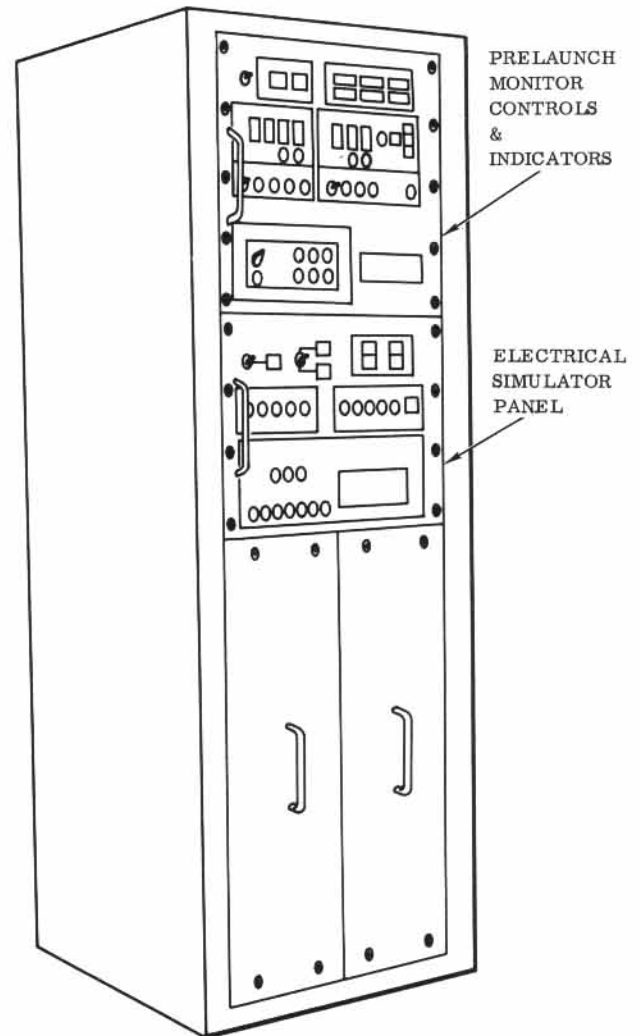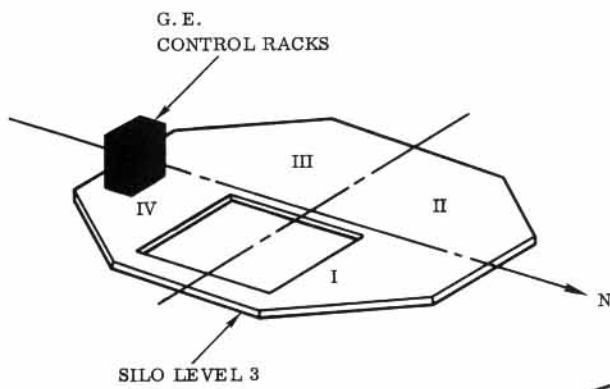


RE-ENTRY VEHICLE GSE

### MOBILE GSE

The mobile ground support equipment used at a launch complex consists of the trucks, trailers and handling equipment shown on the opposite page. This equipment is stored at the Squadron Maintenance Area when not in use at the launch complex.




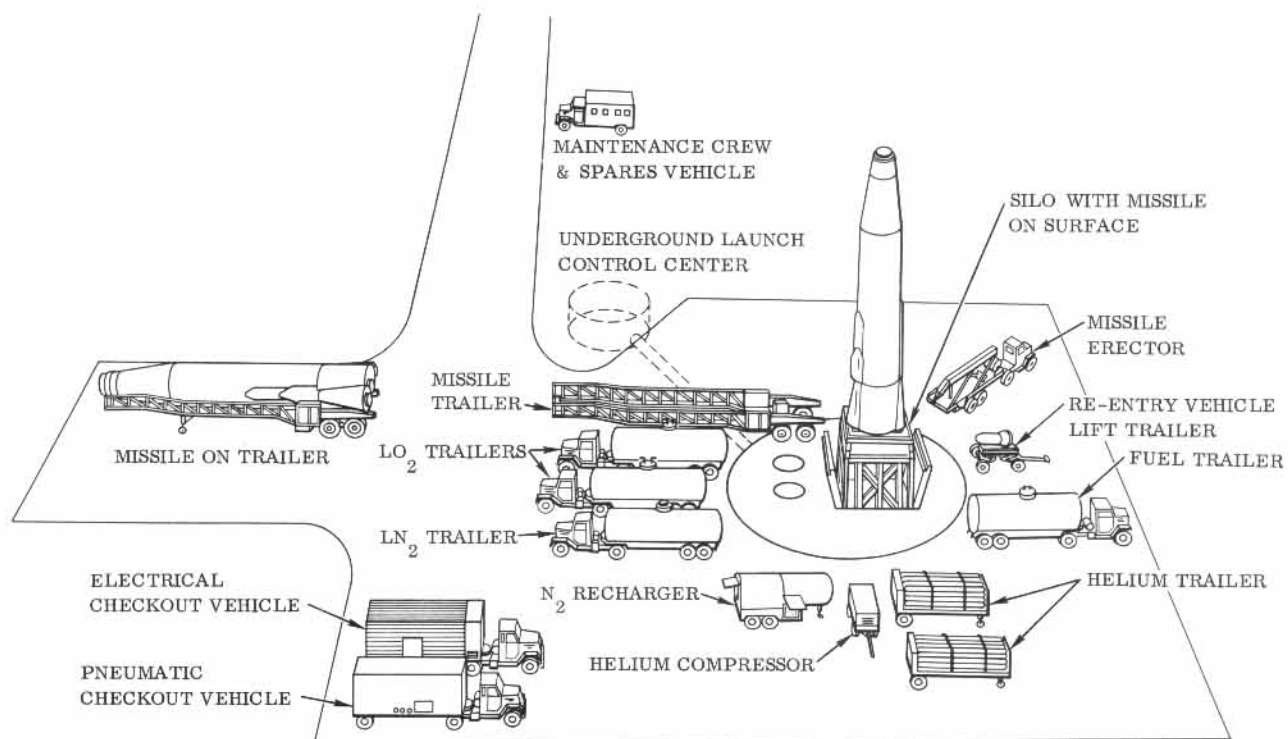

MOBILE GSE

## MISSILE SYSTEMS CHECKOUT AT LAUNCH SITE

Checkouts of the systems aboard a silo-based missile can be performed at the launch complex without removing the missile from the launcher platform. Checkouts are performed using equipment housed in two trailers, which are brought to the launch complex from the Squadron Maintenance Area. One of the trailers, the pneumatic checkout vehicle, contains tanks and other equipment which simulate both normal and abnormal missile tank pressures. The electrical checkout vehicle contains automatic programmed checkout equipment which controls and monitors both the pneumatic checkout vehicle and the missileborne systems under test.

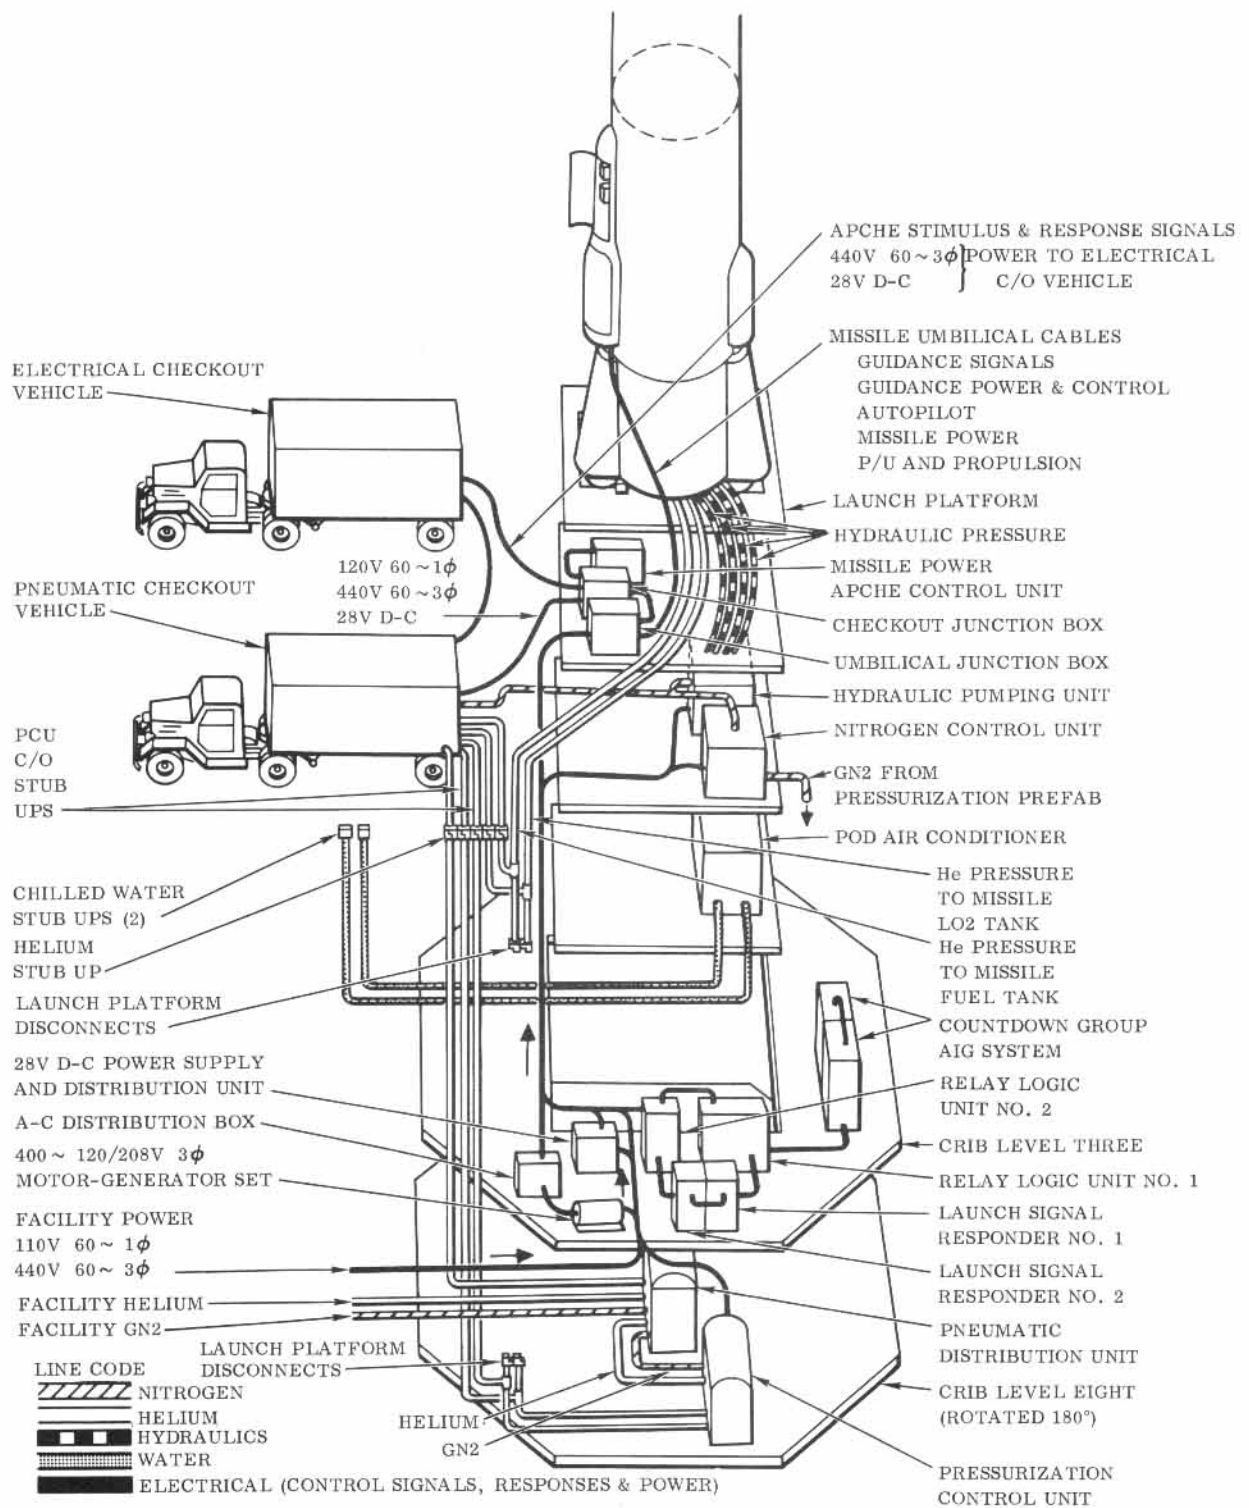


MISSILE SYSTEMS CHECKOUT AT LAUNCH SITE

## LAUNCH CONTROL SYSTEM

The launch control system consists of control cabinets and cabling in the silo, and a launch control console in the launch control center. This system continuously monitors the countdown readiness of the missile and its ground support equipment and controls and monitors their operation during a countdown.


# EQUIPMENT KEY

- 1 PRESSURIZATION CONTROL UNIT
- 2 PNEUMATIC DISTRIBUTION UNIT
- 3 RE-ENTRY VEHICLE PRE-LAUNCH MONITOR & CONTROL GROUP
- 4 COUNTDOWN GROUP (AIG)
- 5 JUNCTION BOX FOR POD AIR CONDITIONING UNIT
- 6 JUNCTION BOX FOR HYDRAULIC PUMPING UNIT
- 7 FACILITY INTERFACE CABINET
- 8 RELAY LOGIC UNIT NO. 1
- 9 LAUNCH SIGNAL RESPONDER NO. 1
- 10 LAUNCH SIGNAL RESPONDER NO. 2
- 11 NON-ESSENTIAL BUS CONTROL CENTER
- 12 ESSENTIAL BUS CONTROL CENTER
- 13 POWER REMOTE CONTROL PANEL (REF.)
- 14 LAUNCH CONTROL CONSOLE
- 15 SURVEILLANCE TV MONITOR (REF.)
- 16 GATE TV MONITOR (REF.)
- 17 BATTERY CHARGER (REF.)
- 18 BATTERIES FOR TELEPHONE SYSTEM (REF.)
- 19 COMMUNICATION (TELEPHONE) EQUIPMENT (REF.)
- 20 FACILITY REMOTE CONTROL PANEL (REF.)
- 21 AMF MOTOR CONTROL CENTER
- 22 AMF LOGIC RACKS

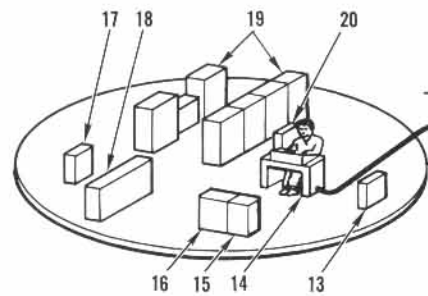

LAUNCH CONTROL CENTER 2nd LEVEL


- 23 NITROGEN CONTROL UNIT
- 24 UMBILICAL JUNCTION BOX
- 25 MISSILE UMBILICAL CABLES
- GUIDANCE SIGNAL
- GUIDANCE POWER & CONTROL
- AUTOPILOT
- R/V
- MISSILE POWER
- P/U & PROPULSION
- 26 MISSILE POD
- 27 HELIUM CHARGE UNIT
- 28 HYDRAULIC PUMPING UNIT
- 29 POD AIR CONDITIONING UNIT
- 30 LAUNCH PLATFORM
- 31 CABLE LOOP
- 32 RELAY LOGIC UNIT NO. 2
- 33 PLATFORM SENSING ALIGNMENT GROUP

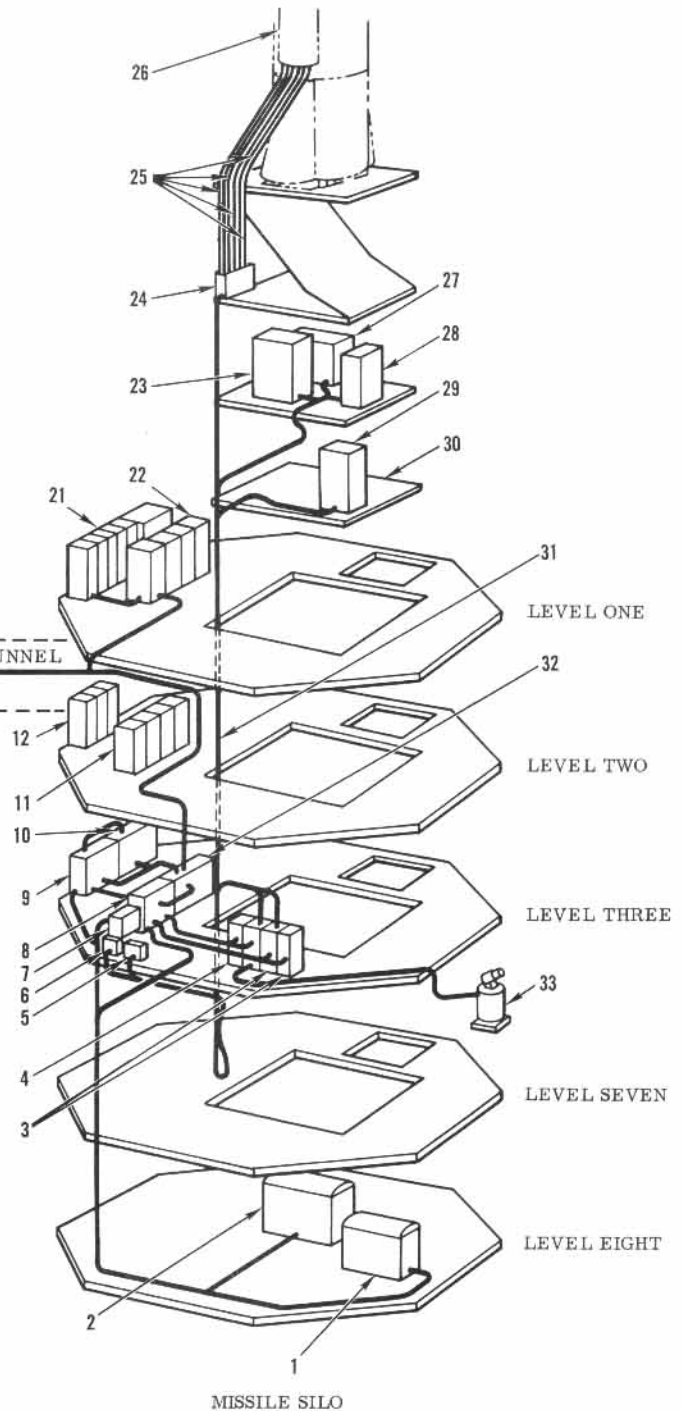

LAUNCH CONTROL SYSTEM

## LAUNCH CONTROL CONSOLE

The launch control officer monitors and operates the missile and its ground support equipment from the launch control console located on the lower level of the Launch Control Center (see opposite page). The indicators and controls on the panel show the countdown-ready status of missileborne and silo-mounted systems; pushbuttons are provided for the emergency control of missile tank pressures. In the upper left corner of the panel are guidance system indicators and controls. At the top center of the panel is a digital clock. During a countdown, this clock indicates the time remaining before missile launch. When the ready-for-countdown indicator is green, a countdown can be started by depressing the start button below it. Indicators to the right of this button show the progress of the countdown. When the ready-for-commit indicator turns green, depressing the button to the right of that indicator causes the missile to be raised out of the silo and launched. If a malfunction occurs during a countdown, the sequence can be reversed to the ready-for-countdown point by depressing the start abort button to the right of the precommit indicators. Other controls on the panel include buttons for the launch complex telephone and public address systems.

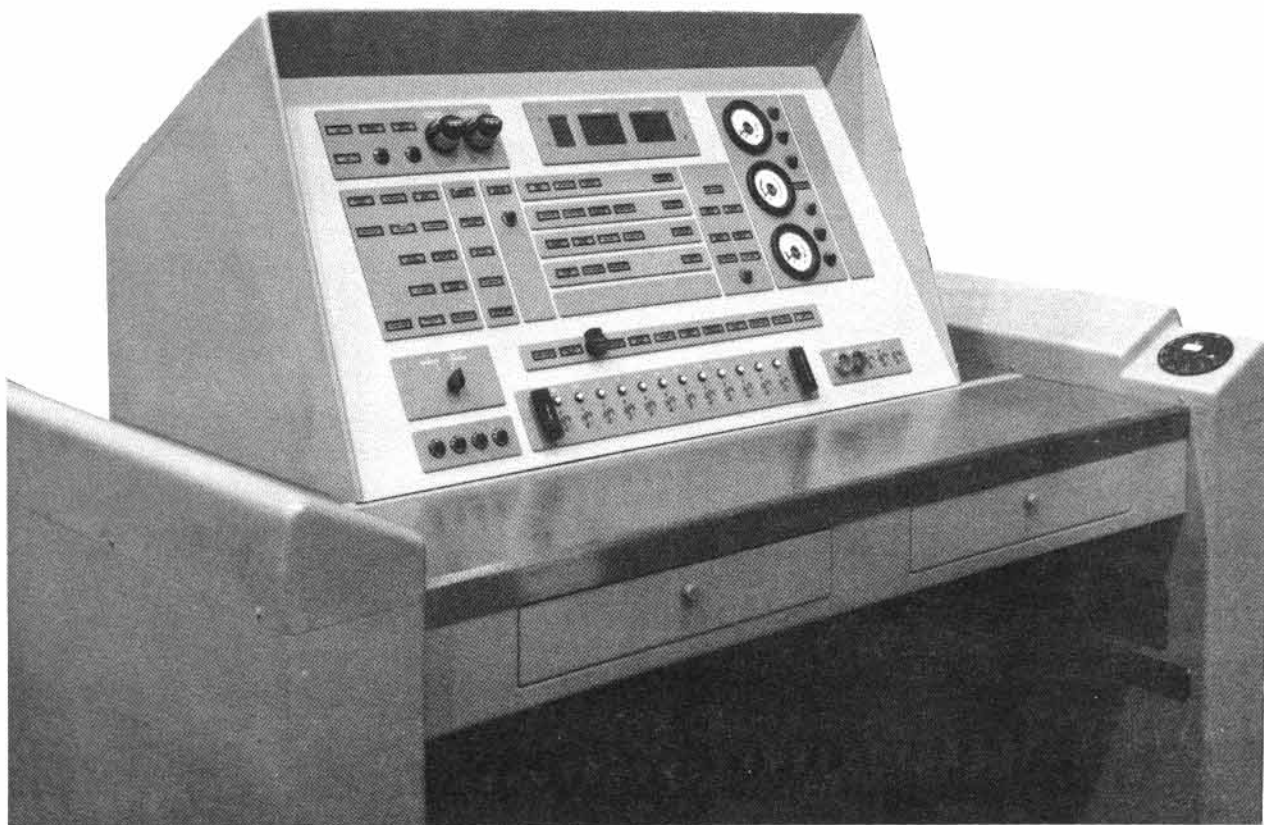


LAUNCH CONTROL CONSOLE

## MISSILE ERECTION SYSTEM

The missile erection system consists of a trailer-mounted erector and four trailer alignment rails. The erector essentially is a walking beam actuated by an electrically driven jackscrew. Before missile erection or removal, the trailer alignment rails are anchored in pairs to steel plates, which are embedded in the silo cap at opposite sides of the launcher platform opening. The missile handling trailer is backed onto one pair of alignment rails, and the erector trailer is backed onto the other pair. With the launcher platform raised to the proper height above ground, one side of the missile thrust section is attached to pivots on the launcher; the other side is attached to a hinged fitting on the walking beam of the erector. Then the erector's jackscrew either retracts the beam for missile erection or extends it for missile removal.



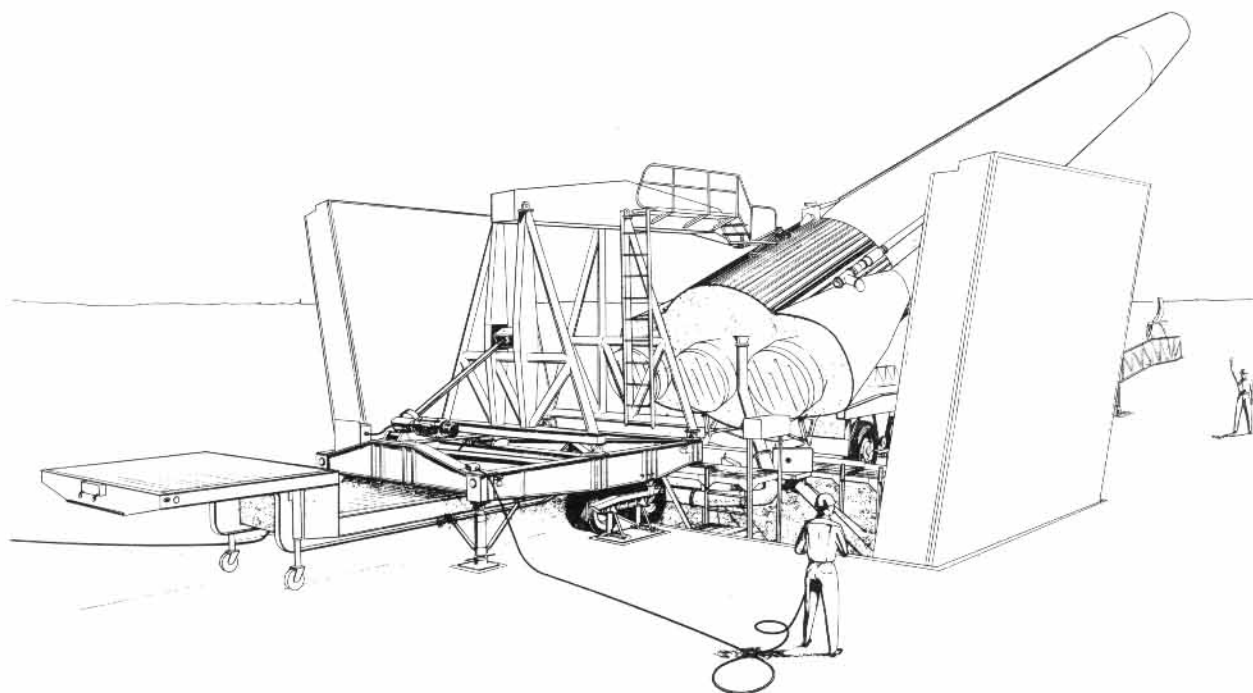

MISSILE ERECTION SYSTEM

VI. GLOSSARY

## GLOSSARY

Terms used in this manual are defined below in the sense in which they apply to base activation.

AMC--Air Material Command of the U.S. Air Force, the logistic service agency, which controls the purchase of weapons and other property for the Air Force.

ARDC--The Air Research and Development Command of the U.S. Air Force. The service agency directing the development of Air Force weapon systems.

ASSOCIATE CONTRACTOR--A civilian contracting organization working with Astronautics in the activation of a complete missile base.

BMD--The Ballistic Missile Division of the U.S. Air Force. The service agency directly responsible for and in charge of the Ballistic Missile Program, including the Atlas Program, for which BMD is the Project Office.

BOD (Beneficial Occupancy Date)--The date on which the facility is accepted by the Air Force at which time Astronautics and its associate contractors and subcontractors can commence installing ground support and other equipment.

COMPLEX--A complex is comprised of a silo, launch control center, paving, fences, underground storage tanks, etc., necessary to the protection maintenance and launching of single Atlas Series F missile.

CONFIGURATION--The physical sum of all the component structures, equipment instrumentation, and other property which comprises a complete weapon system.

COORDINATION--The synchronization of two or more parallel but independent actions all of which are needed to accomplish a single thing.

EID--A four-digit numerical representation of the work description of an end item configuration.

END ITEM--A final combination of parts, assemblies and installations comprising a product which is ready for its intended use, either along or in conjunction with other end items.

**FACILITY**--The structures, machinery, instruments, and equipment built, provided, and installed by the Corps of Engineers' contractors in accordance with architect and engineer drawings and specifications.

**FUNCTION**--A Base Activation term which is used to define a grouping of components used principally for the same purpose and validated as an individual operational entity. It may define a complete system or only part of a system.

**GSE (Ground Support Equipment)**--All mobile or installed equipment, instruments, and the like, employed in the weapon system which is neither facility nor missile. (See severable items.)

**INSTALLATION & CHECKOUT (I&C) SCHEDULE**--A schedule chart showing flow and span time of GSE installation, validation and integration tasks necessary to activate an Atlas missile launch complex.

**INSTALLATION**--The placement and securing of the item. It does not necessarily mean that the item will be completely hooked up mechanically and electrically unless the planning card so describes it.

**INTEGRATION**--The action necessary to interconnect two or more functions and check out the resulting configuration.

**INTEGRATED FACILITY ITEMS**--Facility items which are included in activation functions.

**INTERFACE**--Within silo systems, any point where facility and GSE installations meet.

**ITEM**--An incremental collection of work tasks that will be accomplished in a given period of time. In most cases in activation, an item corresponds to an OIL.

**JOD (Joint Occupancy Date)**--A date (prior to BOD) agreed upon by Astronautics BMD and Corps of Engineers. It allows certain I&C tasks to commence before the facility is completed and accepted by the Air Force.

**OIL (Operations Inspection Log)**--A document produced by IBM data processing methods, compiling the identifying numbers of the planning cards related to a particular group of work, usually an item.

**PLANNING CARD**--The paper form used to spell out in detail the operations to be accomplished during activation. References to procedures, drawings, etc., are included.

**SEVERABLE ITEMS**--Items of property which may be readily moved from one location to another. Examples: desks, hand tools, motor vehicles, laboratory equipment, calibration instruments.

SPECIFICATIONS--The detailed book of specifications prepared under the Corps of Engineers for Facility portions of each base.

SURVEILLANCE PLAN--An instrument whereby men and material are provided and deployed in such manner as to ensure complex and continuing observation of all phases of work involved in activating an Atlas missile silo launch base.

TAB CARD--A special-paper IBM card with perforations corresponding to coded numbers and letters representing status data, which is extracted from the card by electronic data processing machines. The accumulated data from all cards in a "run" is printed out by the machines in any desired, predetermined form of summation or analysis of project status.

VALIDATION--The action of determining that a system or other prescribed portion of the base can and will serve the purpose for which it was created.

WEAPON SYSTEM CONTRACTOR--The agency accepting over-all responsibility for production of the weapon system. Design criteria, surveillance, coordination, quality control and final selloff are facets of this task. Astronautics is the weapon system contractor for the Atlas weapon system.



GENERAL DYNAMICS | ASTRONAUTICS